



# ERBODY



# UNDE



# XD Steel Underbodies

*Buyers' Toughest Line of Boxes Built for Heavy Duty Commercial Use*



## XD Steel Features



Cross-broke door for added durability



Detachable 3/16 in. door chains



Greasable bullet hinges



Built-in rain gutter

- 12 gauge steel box and cross-broke door
- Patent pending removable door design
- Automotive D-bulb seal
- Greasable bullet hinges with 1/2" stainless steel pins
- Built-in rain gutter
- Detachable 3/16" door chains
- Locking die cast T-handle compression latch



## Black, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1742300	18	18	24	1	80	530 (Y)
1742303	18	18	30	1	91	530 (Y)
1742305	18	18	36	1	104	530 (Y)
1742310	18	18	48	1	127	530 (Y)
1744300	24	24	24	1	90	530 (Y)
1744303	24	24	30	1	115	530 (Y)
1744305	24	24	36	1	132	530 (Y)

## Black, Double Door

*Works great as Topsider on flatbeds and service bodies.*



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1742315†	18	18	60	1	175	530 (Y)
1742325†	18	18	72	1	202	530 (Y)
1742335†	18	18	90	1	228	530 (Y)
1742336†	18	18	96	2	250	530 (Y)

†Boxes can be used as topsiders and underbodies



# Steel Underbodies



14 gauge powder-coated steel box with 12 gauge steel door

Replaceable gasket sealing system

Bolt-on, stainless steel continuous hidden hinge

Aircraft grade door cables

Drop-down recessed door

1702305


## Steel Features



Bolt-on, stainless steel continuous hidden hinge




Replaceable gasket sealing system



Aircraft grade door cables

## T-HANDLE LATCH

- 14 gauge powder-coated steel box with 12 gauge steel door
- Drop-down recessed door
- Locking stainless steel T-handle latches
- Bolt-on, stainless steel continuous hidden hinge
- Replaceable gasket sealing system
- Aircraft grade door cables
- Reinforced door backbone on boxes 48" and wider
- Door opening: flat surface mount (90°) or underbody mount (180°)

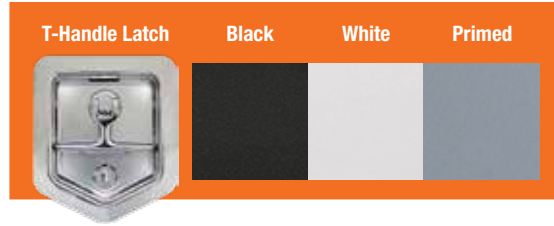

### Black, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1703349	14	12	18	1	37	530 (Y)
1703350	14	12	24	1	40	530 (Y)
1703353	14	12	30	1	49	530 (Y)
1703300	14	16	24	1	56	530 (Y)
1703303	14	16	30	1	65	530 (Y)
1703305	14	16	36	1	74	530 (Y)
1703310	15	10	15	1	28	530 (Y)
1703312	15	10	24	1	39	530 (Y)
1703320	15	13	15	1	32	530 (Y)
1703322	15	13	24	1	45	530 (Y)
1703324	15	13	30	1	53	530 (Y)
1703326	15	13	36	1	61	530 (Y)
1703330	16	14	18	1	50	530 (Y)
1702295	18	18	18	1	47	530 (Y)
1702300	18	18	24	1	67	530 (Y)
1702303	18	18	30	1	80	530 (Y)
1702305	18	18	36	1	92	530 (Y)
1704300	24	24	24	1	87	530 (Y)
1704303	24	24	30	1	100	530 (Y)
1704305	24	24	36	1	116	530 (Y)

### Black, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1703328*	15	13	48	2	83	530 (Y)
1702310	18	18	48	2	118	530 (Y)
1702315	18	18	60	2	143	530 (Y)
1702317	18	18	66	2	186	530 (Y)
1708310	18	24	48	2	133	530 (Y)
1704310	24	24	48	2	145	530 (Y)
1704315	24	24	60	2	175	530 (Y)

### Black, Double Door



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702325†	18	18	72	1	156	530 (Y)

†Boxes can be used as topsiders and underbodies

# Steel Underbody

## White, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1703400</b>	14	16	24	1	56	530 (Y)
<b>1703403</b>	14	16	30	1	65	530 (Y)
<b>1703405</b>	14	16	36	1	71	530 (Y)
<b>1703495</b>	18	18	18	1	47	530 (Y)
<b>1702400</b>	18	18	24	1	67	530 (Y)
<b>1702403</b>	18	18	30	1	80	530 (Y)
<b>1702405</b>	18	18	36	1	92	530 (Y)
<b>1704400</b>	24	24	24	1	87	530 (Y)
<b>1704403</b>	24	24	30	1	100	530 (Y)
<b>1704405</b>	24	24	36	1	116	530 (Y)

## White, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1702410</b>	18	18	48	2	118	530 (Y)
<b>1702415</b>	18	18	60	2	143	530 (Y)
<b>1702417</b>	18	18	66	2	186	530 (Y)
<b>1708410</b>	18	24	48	2	133	530 (Y)
<b>1704410</b>	24	24	48	2	145	530 (Y)
<b>1704415</b>	24	24	60	2	175	530 (Y)

## Primed, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1703900</b>	14	16	24	1	56	530 (Y)
<b>1702900</b>	18	18	24	1	67	530 (Y)
<b>1702905</b>	18	18	36	1	92	530 (Y)

## Primed, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1702910</b>	18	18	48	2	118	530 (Y)



## T-HANDLE LATCH WITH SHELF

- 14 gauge steel box with 12 gauge steel door
- 14 gauge steel shelf welded at mid height, 12-3/4" deep with 1" front lip
- Locking stainless steel T-handle latches
- Aircraft grade door cables
- Replaceable gasket sealing system

### Black



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1703304</b>	14	16	30	1	72	530 (Y)

### White



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1703404</b>	14	16	30	1	72	530 (Y)
<b>1702406†</b>	18	18	36	1	82	530 (Y)
<b>1702411†</b>	18	18	48	1	106	530 (Y)

†These have 3-Point Compression Latches (see page 13)

## T-HANDLE LATCH WITH SLANTED BACK

- Angled top allows room for fuel fill hoses on single rear wheel flat beds
- Locking stainless steel T-handle latches
- Door opening: flat surface mount (90°) or underbody mount (180°)
- Drop-down recessed door
- Replaceable gasket sealing system

### Black



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1703351</b>	14	12	18	1	40	530 (Y)
<b>1703352</b>	14	12	24	1	47	530 (Y)
<b>1703355</b>	14	12	30	1	49	530 (Y)



See pg. 28-29 for Underbody Mounting Brackets

# Steel Underbody

## PADDLE LATCH

- 14 gauge powder-coated steel box with 12 gauge steel door
- Drop-down recessed door
- Locking stainless steel paddle latch
- Continuous bolt-on hidden hinge
- Replaceable gasket sealing system
- Aircraft grade door cables
- Reinforced door backbone on boxes 48" and wider
- Door opening: flat surface mount (90°) or underbody mount (180°)



### Black, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1703150	14	12	24	1	48	530 (Y)
1703100	14	16	24	1	56	530 (Y)
1703103	14	16	30	1	65	530 (Y)
1702100	18	18	24	1	67	530 (Y)
1702103	18	18	30	1	80	530 (Y)
1702105	18	18	36	1	92	530 (Y)

### Black, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702110	18	18	48	2	118	530 (Y)
1702115	18	18	60	2	143	530 (Y)

### White, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1703203	14	16	30	1	65	530 (Y)
1703205	14	16	36	1	74	530 (Y)
1702200	18	18	24	1	67	530 (Y)
1702203	18	18	30	1	80	530 (Y)
1702205	18	18	36	1	92	530 (Y)


### White, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702210	18	18	48	2	118	530 (Y)
1702215	18	18	60	2	143	530 (Y)

## 3-POINT COMPRESSION LATCH

- 14 gauge powder-coated steel box with 12 gauge steel door
- Drop-down recessed door
- Die-cast T-handle compression latch with 3-point locking system
- Bolt-on continuous hidden hinge
- Replaceable gasket sealing system
- Aircraft grade door cables
- Reinforced door backbone on boxes 48" and wider
- Door opening: flat surface mount (90°) or underbody mount (180°)

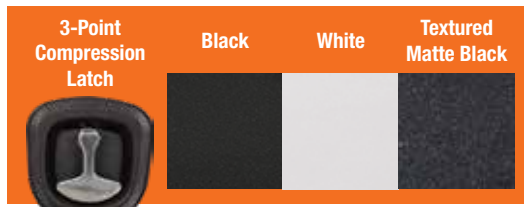

### Black



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1732300	18	18	24	1	59	530 (Y)
1732303	18	18	30	1	70	530 (Y)
1732305	18	18	36	1	83	530 (Y)
1732310	18	18	48	1	118	530 (Y)
1732315*	18	18	60	1	143	530 (Y)
1734300	24	24	24	1	84	530 (Y)
1734303	24	24	30	1	95	530 (Y)
1734305	24	24	36	1	110	530 (Y)

### White



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1732400	18	18	24	1	59	530 (Y)
1732403	18	18	30	1	70	530 (Y)
1732405	18	18	36	1	83	530 (Y)
1734400	24	24	24	1	84	530 (Y)
1734403	24	24	30	1	95	530 (Y)
1734405	24	24	36	1	110	530 (Y)
1702406†	18	18	36	1	82	530 (Y)
1702411†	18	18	48	1	106	530 (Y)

†Includes shelf (see page 11)

### Textured Matte Black



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1732500	18	18	24	1	59	530 (Y)
1732503	18	18	30	1	70	530 (Y)
1732505	18	18	36	1	83	530 (Y)
1732510	18	18	48	1	118	530 (Y)
1734500	24	24	24	1	84	530 (Y)
1734503	24	24	30	1	95	530 (Y)
1734505	24	24	36	1	110	530 (Y)



# Steel Underbody

## POLISHED STAINLESS STEEL DOOR WITH COMPRESSION LATCH

- 14 gauge steel or stainless box with 12 gauge steel door or polished 12 gauge stainless steel door
- Drop-down recessed door
- Locking die-cast T-handle compression latch
- Continuous hidden hinge
- Replaceable gasket sealing system
- Aircraft grade door cables
- Reinforced door backbone on boxes 48" and wider
- Door opening: flat surface mount (90°) or underbody mount (180°)



### Black Box, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1703700	14	16	24	1	55	530 (Y)
1703703	14	16	30	1	64	530 (Y)
1703705	14	16	36	1	71	530 (Y)
1702700	18	18	24	1	72	530 (Y)
1702703	18	18	30	1	81	530 (Y)
1702705	18	18	36	1	101	530 (Y)
1704705	24	24	36	1	132	530 (Y)

### Black Box, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702710	18	18	48	2	110	530 (Y)
1702715	18	18	60	2	132	530 (Y)
1704710	24	24	48	2	169	530 (Y)
1704715	24	24	60	2	227	530 (Y)

### Black Box, Double Door



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702725	18	18	72	1	156	530 (Y)

## Stainless Box, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702595	18	18	18	1	51.5	530 (Y)
1702600	18	18	24	1	61.5	530 (Y)
1702603	18	18	30	1	81	530 (Y)
1702605	18	18	36	1	85	530 (Y)
1704600*	24	24	24	1	87	530 (Y)
1704603*	24	24	30	1	100	530 (Y)
1704605*	24	24	36	1	116	530 (Y)

## Stainless Box, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702610	18	18	48	2	110	530 (Y)
1704610*	24	24	48	2	145	530 (Y)
1704615*	24	24	60	2	175	530 (Y)



# Steel Underbody

## MIRROR FINISH STAINLESS STEEL DOOR WITH COMPRESSION LATCH

- 16 gauge high polish steel box and door
- Drop-down external door
- Locking die-cast T-handle compression latch
- Continuous hidden hinge
- Replaceable door cables
- Built-in rain gutter with automotive bulb seal



### Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1702650</b>	18	18	24	1	48	530 (N)
<b>1702653</b>	18	18	30	1	57	530 (N)
<b>1702655</b>	18	18	36	1	65	530 (N)

### Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1702660</b>	18	18	48	2	80	530 (N)





## DIAMOND TREAD ALUMINUM DOOR WITH COMPRESSION LATCH

- 14 gauge steel box with .100" thick diamond tread door
- Drop-down recessed door
- Locking die-cast T-handle compression latch
- Bolt-on continuous hidden hinge
- Replaceable gasket sealing system
- Aircraft grade door cables
- Door opening: flat surface mount (90°) or underbody mount (180°)
- Reinforced door backbone on boxes 48" and wider



### Black, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702500	18	18	24	1	61	530 (Y)
1702503	18	18	30	1	72	530 (Y)
1702505	18	18	36	1	82	530 (Y)

### Black, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1702510	18	18	48	2	104	530 (Y)



See pg. 28-29 for Underbody Mounting Brackets

# XD Aluminum Underbodies

Buyers' Toughest Line of Boxes Built for Heavy Duty Commercial Use



## XD Aluminum Features



Die-cast T-handle compression latch with 3-point locking system



Rain gutter for added protection




Rigid extruded box frame and automotive bulb seal



Unobstructed box opening

## SMOOTH ALUMINUM BARN DOOR WITH 3-POINT COMPRESSION LATCH

- .125" thick smooth aluminum with rigid extruded box frame
- Die-cast T-handle compression latch with 3-point locking system
- Stainless steel bolt-on continuous hinge with oversized 1/4" pin
- Built-in rain gutter with automotive bulb seal
- Unobstructed box opening with no center post

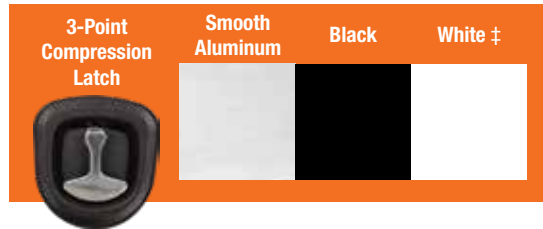

### Smooth Aluminum



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1705405	18	18	36	1	51	530 (Y)
1705410	18	18	48	1	62	530 (Y)
1705415	18	18	60	1	73	530 (Y)
1705420	18	24	36	1	58	530 (Y)
1705425	18	24	48	1	71	530 (Y)
1705430	18	24	60	1	85	530 (Y)
1705435	24	24	36	1	67	530 (Y)
1705440	24	24	48	1	83	530 (Y)
1705445	24	24	60	1	99	530 (Y)
1705450	24	24	72	1	105	530 (Y)

### Black



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1705905*	18	18	36	1	51	530 (Y)
1705910*	18	18	48	1	62	530 (Y)
1705915*	18	18	60	1	73	530 (Y)
1705920*	18	24	36	1	58	530 (Y)
1705925*	18	24	48	1	71	530 (Y)
1705930*	18	24	60	1	85	530 (Y)
1705935*	24	24	36	1	67	530 (Y)
1705940*	24	24	48	1	83	530 (Y)
1705945*	24	24	60	1	99	530 (Y)
1705950*	24	24	72	1	105	530 (Y)

### White‡



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1706905* ‡	18	18	36	1	51	530 (Y)
1706910* ‡	18	18	48	1	62	530 (Y)
1706915* ‡	18	18	60	1	73	530 (Y)
1706920* ‡	18	24	36	1	58	530 (Y)
1706925* ‡	18	24	48	1	71	530 (Y)
1706930* ‡	18	24	60	1	85	530 (Y)
1706935* ‡	24	24	36	1	67	530 (Y)
1706940* ‡	24	24	48	1	83	530 (Y)
1706945* ‡	24	24	60	1	99	530 (Y)
1706950* ‡	24	24	72	1	105	530 (Y)


‡ White is not stocked. Please call for lead time.

See pg. 28-29 for Underbody Mounting Brackets

# XD Aluminum Underbody

## DROP DOOR WITH 3-POINT COMPRESSION LATCH

- .125" thick smooth aluminum with rigid extruded box frame (.100" thick diamond tread aluminum door on certain models)
- Die-cast T-handle compression latch with 3-point locking system
- Stainless steel bolt-on continuous hinge with oversized 1/4" pin
- Built-in rain gutter with automotive bulb seal

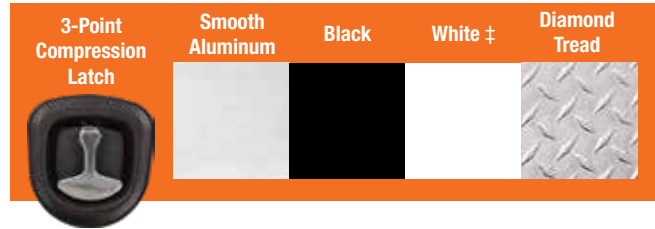

### Smooth Aluminum



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1706400	18	18	24	1	43.80	530 (Y)
1706403	18	18	30	1	50.45	530 (Y)
1706405	18	18	36	1	56.70	530 (Y)
1706410	18	18	48	1	64.45	530 (Y)
1706415	18	18	60	1	77.80	530 (Y)
1706420	18	24	36	1	56.68	530 (Y)
1706425	18	24	48	1	78.87	530 (Y)
1706430	18	24	60	1	82.70	530 (Y)

### Black



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1706960*	18	18	24	1	43.80	530 (Y)
1706963*	18	18	30	1	50.45	530 (Y)
1706965*	18	18	36	1	56.70	530 (Y)
1706970*	18	18	48	1	64.45	530 (Y)
1706975*	18	18	60	1	77.80	530 (Y)
1706980*	18	24	36	1	56.68	530 (Y)
1706985*	18	24	48	1	78.87	530 (Y)
1706990*	18	24	60	1	82.70	530 (Y)

### White‡



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1707960* ‡	18	18	24	1	43.80	530 (Y)
1707963* ‡	18	18	30	1	50.45	530 (Y)
1707965* ‡	18	18	36	1	56.70	530 (Y)
1707970* ‡	18	18	48	1	64.45	530 (Y)
1707975* ‡	18	18	60	1	77.80	530 (Y)
1707980* ‡	18	24	36	1	56.68	530 (Y)
1707985* ‡	18	24	48	1	78.87	530 (Y)
1707990* ‡	18	24	60	1	82.70	530 (Y)

‡ White is not stocked. Please call for lead time.



# XD Aluminum/Aluminum Underbody with Drawers

## Diamond Tread Aluminum



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1706500	18	18	24	1	41	530 (Y)
1706503	18	18	30	1	48	530 (Y)
1706505	18	18	36	1	56	530 (Y)
1706510	18	18	48	1	69	530 (Y)
1706515	18	18	60	1	78.8	530 (Y)
1706520*	18	24	36	1	66.6	530 (Y)
1706525*	18	24	48	1	79.8	530 (Y)
1706530*	18	24	60	1	83.7	530 (Y)


## ALUMINUM UNDERBODY WITH DRAWERS

- .100" thick diamond tread aluminum
- Drawer comes with adjustable dividers and 100 lb rated 16" slides
- Drop-down recessed door
- Locking die-cast T-handle compression latch
- Continuous hidden hinge
- Replaceable gasket sealing system
- Door opening: flat surface mount (90°) or underbody mount (180°)
- Reinforced door backbone
- Aircraft grade door cables



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1712200	20	18	24	1	50	530 (Y)
1712205	20	18	36	1	66	530 (Y)
1712210	20	18	48	1	85	530 (Y)

# Aluminum Underbodies

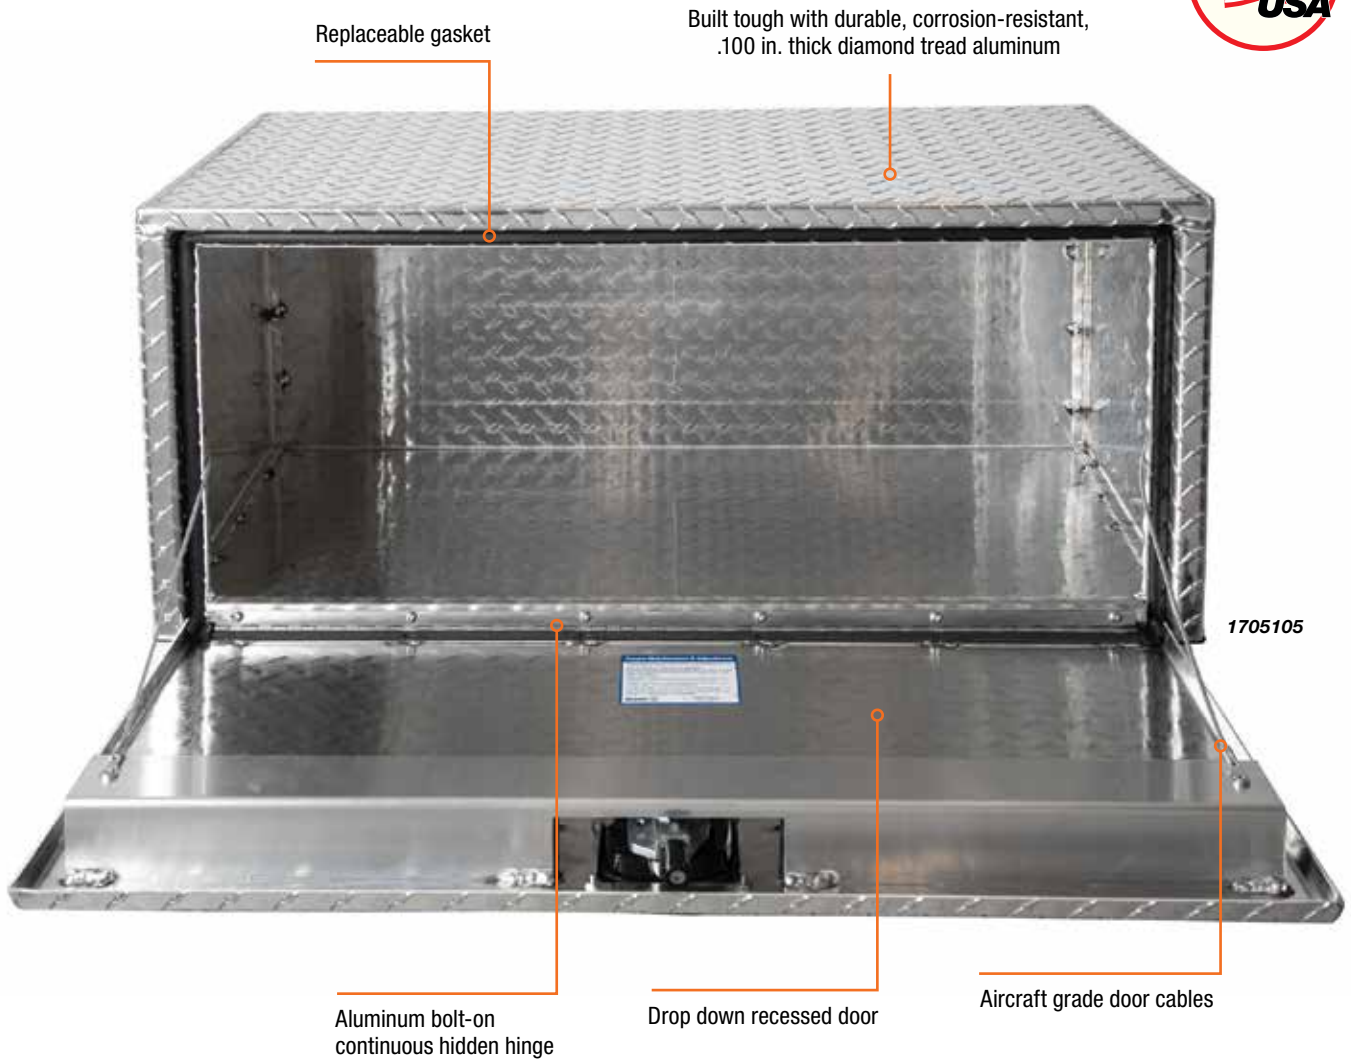

## Aluminum Features



Replaceable gasket



Aluminum bolt-on continuous hidden hinge



Aircraft grade door cables

## COMPRESSION LATCH

- .100" thick diamond tread aluminum
- Drop-down recessed door
- Locking die-cast T-handle compression latch
- Aluminum bolt-on continuous hidden hinge
- Replaceable gasket sealing system
- Aircraft grade door cables
- Reinforced door backbone on boxes 48" and wider
- Door opening: flat surface mount (90°) or underbody mount (180°)



### Diamond Tread, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1705148	14	12	16	1	18	530 (Y)
1705149	14	12	18	1	19	530 (Y)
1705150	14	12	24	1	23	530 (Y)
1705153	14	12	30	1	26	530 (Y)
1705160	14	16	24	1	25	530 (Y)
1705102	18	18	14	1	24.6	530 (Y)
1705101	18	18	18	1	30	530 (Y)
1705100	18	18	24	1	32.5	530 (Y)
1705103	18	18	30	1	38.5	530 (Y)
1705105	18	18	36	1	43	530 (Y)
1705118	20	20	36	1	46	530 (Y)
1705119*	18	24	36	1	56	530 (Y)
1705130	24	24	24	1	45	530 (Y)
1705133	24	24	30	1	52	530 (Y)
1705135	24	24	36	1	59.5	530 (Y)

### Diamond Tread, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1705110	18	18	48	2	56.5	530 (Y)
1705115	18	18	60	2	66	530 (Y)
1705120	18	24	48	2	63.5	530 (Y)
1705125*	18	24	60	2	82	530 (Y)
1705140	24	24	48	2	75	530 (Y)
1705145	24	24	60	2	88.5	530 (Y)
1705147	24	24	72	2	97	530 (Y)

# Aluminum Underbody

## Black Diamond Tread, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1725148*	14	12	16	1	18	530 (Y)
1725149*	14	12	18	1	22.5	503 (Y)
1725150	14	12	24	1	22.5	530 (Y)
1725153	14	12	30	1	27	530 (Y)
1725160	14	16	24	1	26	530 (Y)
1725102*	18	18	14	1	27	530 (Y)
1725101	18	18	18	1	27	530 (Y)
1725100	18	18	24	1	30	530 (Y)
1725103	18	18	30	1	38	530 (Y)
1725105	18	18	36	1	42	530 (Y)
1725116*	18	24	30	1	39.7	530 (Y)
1725119*	18	24	36	1	56	530 (Y)
1725125*	18	24	60	1	64	530 (Y)
1725118*	20	20	36	1	64	530 (Y)
1725130	24	24	24	1	46	530 (Y)
1725133	24	24	30	1	53	530 (Y)
1725135	24	24	36	1	59	530 (Y)

## Black Diamond Tread, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1725110	18	18	48	2	52	530 (Y)
1725115	18	18	60	2	70	530 (Y)
1725120	18	24	48	2	64	530 (Y)
1725140	24	24	48	2	76	530 (Y)
1725145	24	24	60	2	89	530 (Y)
1725147*	24	24	72	2	97	530 (Y)

## Textured Matte Black Diamond Tread, Single Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1715100	18	18	24	1	30	530 (Y)
1715105	18	18	36	1	42	530 (Y)

## Textured Matte Black Diamond Tread, Dual Latch



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1715110	18	18	48	2	52	530 (Y)
1715115	18	18	60	2	70	530 (Y)



## 3-POINT COMPRESSION LATCH


- .100" thick diamond tread aluminum
- Drop-down recessed door
- Die-cast T-handle compression latch with 3-point locking system
- Aluminum bolt-on continuous hidden hinge
- Replaceable gasket sealing system
- Aircraft grade door cables
- Reinforced door backbone
- Door opening: flat surface mount (90°) or underbody mount (180°)



## Diamond Tread



1735100

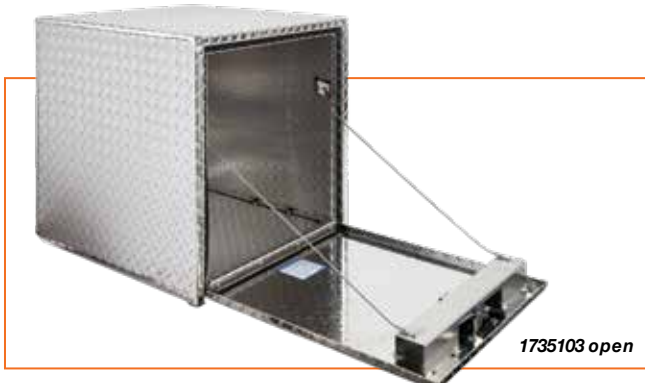

1735103 open


Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1735100	18	18	24	1	32.5	530 (Y)
1735103	18	18	30	1	38	530 (Y)
1735105	18	18	36	1	44	530 (Y)
1735130	24	24	24	1	45	530 (Y)
1735133	24	24	30	1	58	530 (Y)
1735135	24	24	36	1	63	530 (Y)



# Aluminum Underbody

## BARN DOOR WITH 3-POINT COMPRESSION LATCH

- .125" thick diamond tread or smooth aluminum
- Side-hinged doors with reversible right/left locking door
- Die-cast T-handle compression latch with 3-point locking system
- Aluminum bolt-on continuous hinge with oversize 1/4" pin
- Automotive D-bulb seal
- Can mount on flat surface
- Unobstructed box opening with no center post

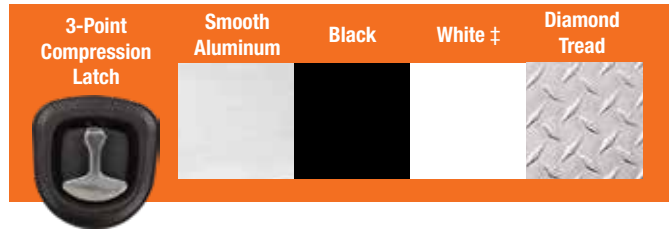

### Smooth Aluminum, Double Door



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1705303	18	18	30	1, 2 Doors	42	530 (Y)
1705305	18	18	36	1, 2 Doors	49	530 (Y)
1705310	18	18	48	1, 2 Doors	63	530 (Y)
1705315	18	18	60	1, 2 Doors	77	530 (Y)
1705333	24	24	30	1, 2 Doors	69	530 (Y)
1705335	24	24	36	1, 2 Doors	75	530 (Y)
1705340	24	24	48	1, 2 Doors	87	530 (Y)
1705345	24	24	60	1, 2 Doors	99	530 (Y)
1705350	24	24	72	1, 2 Doors	98	530 (Y)

### Black, Double Door



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1705803*	18	18	30	1, 2 Doors	42	530 (Y)
1705805*	18	18	36	1, 2 Doors	49	530 (Y)
1705810*	18	18	48	1, 2 Doors	63	530 (Y)
1705815*	18	18	60	1, 2 Doors	77	530 (Y)
1705833*	24	24	30	1, 2 Doors	69	530 (Y)
1705835*	24	24	36	1, 2 Doors	75	530 (Y)
1705840*	24	24	48	1, 2 Doors	87	530 (Y)
1705845*	24	24	60	1, 2 Doors	99	530 (Y)
1705850*	24	24	72	1, 2 Doors	98	530 (Y)

### White‡, Double Door



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
1706803* ‡	18	18	30	1, 2 Doors	42	530 (Y)
1706805* ‡	18	18	36	1, 2 Doors	49	530 (Y)
1706810* ‡	18	18	48	1, 2 Doors	63	530 (Y)
1706815* ‡	18	18	60	1, 2 Doors	77	530 (Y)
1706833* ‡	24	24	30	1, 2 Doors	69	530 (Y)
1706835* ‡	24	24	36	1, 2 Doors	75	530 (Y)
1706840* ‡	24	24	48	1, 2 Doors	87	530 (Y)
1706845* ‡	24	24	60	1, 2 Doors	99	530 (Y)
1706850* ‡	24	24	72	1, 2 Doors	98	530 (Y)

‡ White is not stocked. Please call for lead time.

# Aluminum/Polymer Underbody

## Diamond Tread Aluminum, Double Door



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1705205</b>	18	18	36	1, 2 Doors	49	530 (Y)
<b>1705210</b>	18	18	48	1, 2 Doors	63	530 (Y)
<b>1705215</b>	18	18	60	1, 2 Doors	77	530 (Y)
<b>1702235</b>	24	24	36	1, 2 Doors	71	530 (Y)
<b>1702240</b>	24	24	48	1, 2 Doors	76	530 (Y)
<b>1702250</b>	24	24	60	1, 2 Doors	87	530 (Y)

## BARN DOOR WITH COMPRESSION LATCH

- .125" thick diamond tread or smooth aluminum
- Side-hinged door with reversible right/left locking door
- Die-cast T-handle compression latch
- Aluminum bolt-on continuous hinge with oversize 1/4" pin
- Automotive D-bulb seal
- Can mount on flat surface
- Unobstructed box opening with no center post



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1705201</b>	18	18	18	1	27	530 (Y)
<b>1705200</b>	18	18	24	1	36	530 (Y)
<b>1705203</b>	18	18	30	1	42	530 (Y)

# Polymer Underbody

## 3-POINT T-HANDLE LATCH

### Black, Single Latch

- Constructed of high-density polyethylene
- Drop down door
- Locking stainless steel 3-point T-handle latch
- Stainless steel hinge pin
- Replaceable gasket sealing system
- Aircraft grade door cables
- Molded double-wall door design



Part No.	Height	Depth	Width	# Latches per Door	Wt. (lb)	Cat.
<b>1717100</b>	18	18	24	1	24	530 (Y)
<b>1717105</b>	18	18	36	1	31	530 (Y)
<b>1717110</b>	18	18	48	1	42	530 (Y)

**FREIGHT NOT**  
**INCLUDED IN**  
**PRICE OF UNIT.**  
**FREIGHT WILL**  
**BE BILLED UPON**  
**PURCHASE.**