

# COLUMNLIFT™ SERIES

## The Next Generation BMR


# MAXON®



## BMR SPECIFICATIONS

The best selling direct lift in North America just got better

- New Optional Bolt-on Design
- New Platform Opening / Closing Mechanism
- Rollers OR Slide Pad Configurations
- New Column Impact Guard
- New Main Control Location
- New "Power Down on Demand" Activation
- Mechanical Platform Adjustment
- New Chain Anchor Position
- New Retention Ramp Locking Mechanism
- Flashing platform lights
- MAX GRIP® and Cycle Counter standard
- New Plastic Pump Box and Hydraulic Set-up
- New Battery Box Option with Built-in DC/DC Converter & Resettable Circuit Breaker
- **Galvanized Finish – STANDARD!**

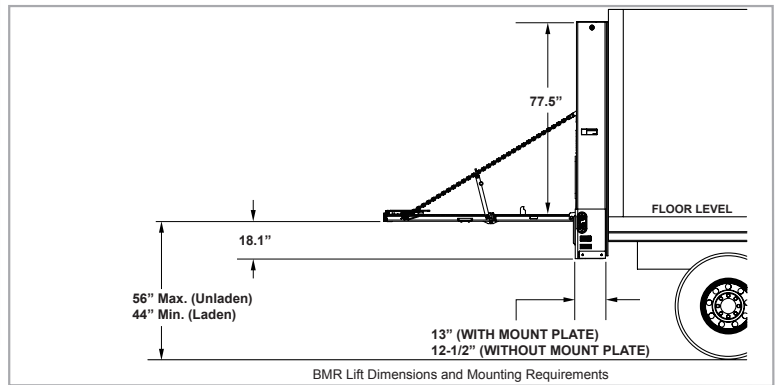

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.

			With 16" Aluminum Retention Ramp (ARR)				
Model	Lifting Capacity		60" x 85" (30"+30")	72" x 85" (36"+36")	84" x 85" (42"+42")	60" x 85" (36"+24")	72" x 85" (42"+30")
Bed Height : Min - Max			44" to 56"	44" to 56"	44" to 56"	44" to 56"	44" to 56"
BMR-35	3,500 lbs.	Approx. Wt.	1,928 lbs.	2,079 lbs.	2,228 lbs.	1,957 lbs.	2,076 lbs.
BMR-44	4,400 lbs.	Approx. Wt.	1,928 lbs.	2,079 lbs.	2,228 lbs.	1,957 lbs.	2,076 lbs.
BMR-55	5,500 lbs.	Approx. Wt.	1,940 lbs.	2,091 lbs.	2,240 lbs.	1,969 lbs.	2,088 lbs.
BMR-66	6,600 lbs.	Approx. Wt.	1,940 lbs.	2,091 lbs.	2,240 lbs.	1,969 lbs.	2,088 lbs.
			With 12" Fixed Ramp				
Model	Lifting Capacity		60" x 85" (36"+24")	72" x 85" (42"+30")	84" x 85" (42"+42")	60" x 85" (36"+24")	72" x 85" (42"+30")
Bed Height : Min - Max			44" to 56"	44" to 56"	44" to 56"	44" to 56"	44" to 56"
BMR-35	3,500 lbs.	Approx. Wt.	1,959 lbs.	2,080 lbs.	1,959 lbs.	2,080 lbs.	1,962 lbs.
BMR-44	4,400 lbs.	Approx. Wt.	1,959 lbs.	2,080 lbs.	1,959 lbs.	2,080 lbs.	1,962 lbs.
BMR-55	5,500 lbs.	Approx. Wt.	1,971 lbs.	2,092 lbs.	1,971 lbs.	2,092 lbs.	1,974 lbs.
BMR-66	6,600 lbs.	Approx. Wt.	1,971 lbs.	2,092 lbs.	1,971 lbs.	2,092 lbs.	1,974 lbs.
			With 16" Aluminum Retention Ramp (ARR)				
Model	Lifting Capacity		60" x 85" (30"+30")	72" x 85" (36"+36")	84" x 85" (42"+42")	60" x 85" (36"+24")	72" x 85" (42"+30")
Bed Height : Min - Max			44" to 56"	44" to 56"	44" to 56"	44" to 56"	44" to 56"
BMR-35	3,500 lbs.	Approx. Wt.	1,902 lbs.	2,019 lbs.	2,133 lbs.	1,900 lbs.	2,018 lbs.
BMR-44	4,400 lbs.	Approx. Wt.	1,902 lbs.	2,019 lbs.	2,133 lbs.	1,900 lbs.	2,018 lbs.
BMR-55	5,500 lbs.	Approx. Wt.	1,914 lbs.	2,031 lbs.	2,145 lbs.	1,912 lbs.	2,030 lbs.
BMR-66	6,600 lbs.	Approx. Wt.	1,914 lbs.	2,031 lbs.	2,145 lbs.	1,912 lbs.	2,030 lbs.
			With 16" ARR				
Model	Lifting Capacity		60" x 85" (30"+30")	72" x 85" (36"+36")	84" x 85" (42"+42")	60" x 85" (36"+24")	72" x 85" (42"+30")
Bed Height : Min - Max			44" to 56"	44" to 56"	44" to 56"	44" to 56"	44" to 56"
BMR-35	3,500 lbs.	Approx. Wt.	1,523 lbs.	1,573 lbs.	1,622 lbs.	1,494 lbs.	1,546 lbs.
BMR-44	4,400 lbs.	Approx. Wt.	1,523 lbs.	1,573 lbs.	1,622 lbs.	1,494 lbs.	1,546 lbs.
BMR-55	5,500 lbs.	Approx. Wt.	1,535 lbs.	1,585 lbs.	1,634 lbs.	1,506 lbs.	1,558 lbs.
BMR-66	6,600 lbs.	Approx. Wt.	1,535 lbs.	1,585 lbs.	1,634 lbs.	1,506 lbs.	1,558 lbs.

\* ACS stands for "Automatic Cart Stop"

NOTE: Weight shown for 102"W weld-on unit. For bolt-on units need to add 122 Lbs. Weights for pump assembly, battery box, frame for pump & battery box mounting, hoses & options are not included.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713, [www.maxonlift.com](http://www.maxonlift.com)

# COLUMNLIFT™ SERIES




## The Next Generation BMR

**MAXON®**


### Optional Features

- Bolt-on
- Rollers or Slide Pads
- Dual Pump & Motor
- Power Down on Demand
- Header Kit
- Dome Light
- Auxiliary Control
- Hand-Held Control
- Conspicuity Tape
- Pressure Gauge

### Loadable Platform Space with Cart Stops Deployed

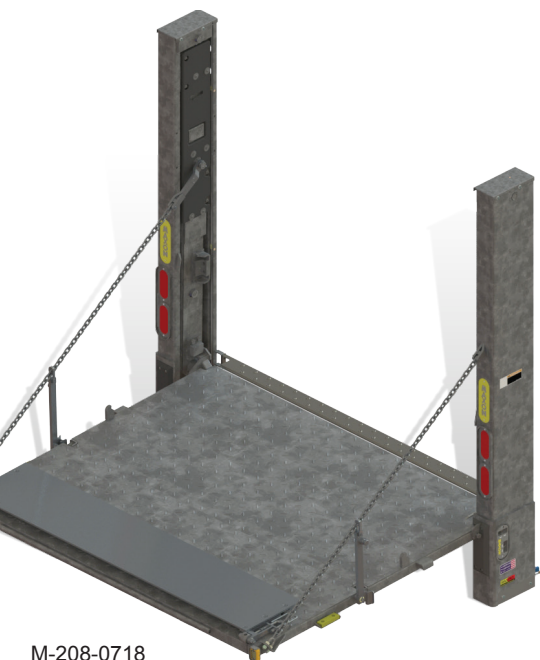


M-208-0718

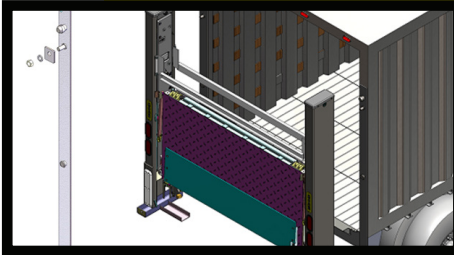


### New Optional Bolt-On Design

New bolt-on design concept reduces overall gate depth by 1.75 inches

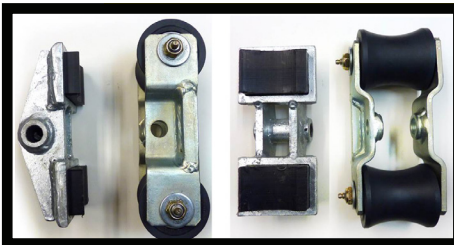

### Rollers OR Slide Pads

As an industry first, the BMR is available with rollers or slide pads

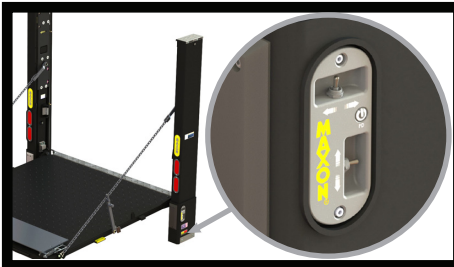


### New Switch Location

Control switch is located on the column and now features an optional power down on demand button




### New Pump Box / Hydraulic Design / LED Controller

Pump and battery box are mounted on a galvanized bolt-on hanger frame. Master disconnect switch is accessible from front of the pump box. Hydraulic components are mounted on a vertical plate that makes all components easily accessible for service. Controller Quick Diagnostic Built-in LED serve as function indicators

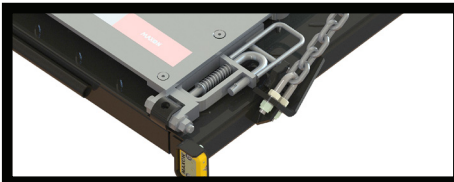

### New Retention Ramp Mechanism

The new retention ramp mechanism makes it easy to lock and unlock the ramp and keeps it tightly stowed during transit

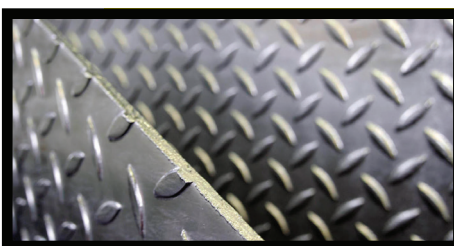

### Fully Galvanized - STANDARD

Galvanization is the process by which zinc is coated over corrosive (easily rusted) metals. The process of galvanizing not only protects from corrosion of various 'soft metals' but also adds strength to the original, uncoated metal




Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713, [www.maxonlift.com](http://www.maxonlift.com)

# GAS BOTTLE SERIES

The BMR-CS Series

# MAXON®

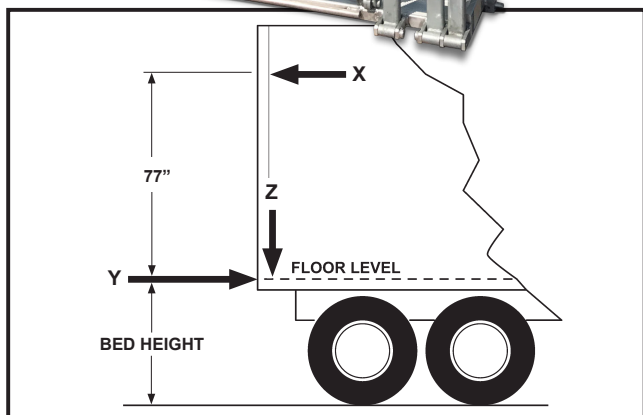

MODEL CAPACITY	P/F SIZE	(X)(Y) LBS.	(Z) LBS.
<b>BMR-CS35 3500 LBS. (GALVANIZED PLATFORM)</b>	36" & 42"	1043	3786
<b>BMR-CS44 4400 LBS. (GLAVANIZED PLATFORM)</b>	36" & 42"	1262	4461

MODEL CAPACITY	P/F SIZE	(X)(Y) LBS.	(Z) LBS.
<b>BMR-CS35 3500 LBS. (ALUMINUM PLATFORM)</b>	36" & 42"	964	3510
<b>BMR-CS44 4400 LBS. (ALUMINUM PLATFORM)</b>	36" & 42"	1183	4185

Lift Dimensions and Mounting Requirements

NOTE: Maximum operating bed height for body is 56" (Unloaded).

Minimum bed height is platform width plus 5" (Loaded).

## BMR-CS SPECIFICATIONS

- New Platform Opening / Closing Mechanism
- Rollers OR Slide Pad Configurations
- New Column Impact Guard
- New Main Control Location
- New "Power Down on Demand" Activation
- New Plastic Pump Box and Hydraulic Set-up
- MAX GRIP® and Cycle Counter standard
- New Battery Box Option with Built-in DC/DC Converter & Resettable Circuit Breaker
- **Galvanized Finish – STANDARD!**

MODEL CAPACITY	OVERALL WEIGHT	PLATFORM LOAD AREA	RETENTION RAMP	BED HEIGHT (For Dock Loading)
Steel Platforms				
BMR-A-CS-35 (3,500 Lbs.)	1763 Lbs. (36 X 80 Platform)	36" x 80" 42" x 80"	18" Aluminum	44" - 56"
	1802 Lbs. (42 x 80 Platform)			
BMR-A-CS-44 (4,400 Lbs.)	1794 Lbs. (36 X 80 Platform)			
	1833 Lbs. (42 x 80 Platform)			
Aluminum Platforms				
BMR-A-CS-35 (3,500 Lbs.)	1675 Lbs. (36 X 80 Platform)	36" x 80" 42" x 80"	16" Aluminum (36"x80")	44" - 56"
	1712 Lbs. (42 x 80 Platform)		20" Aluminum (42"x80")	
BMR-A-CS-44 (4,400 Lbs.)	1704 Lbs. (36 X 80 Platform)			
	1741 Lbs. (42 x 80 Platform)			

**PATENT NUMBERS: (367,748), (5,513,943), (5,449,267)**

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713, [www.maxonlift.com](http://www.maxonlift.com)




# GAS BOTTLE SERIES

## The BMR-CS Series

# MAXON<sup>®</sup>


### Optional Features

- Rollers or Slide Pads
- Dual Pump & Motor
- Power Down on Demand
- Auxiliary Controls System
- Hand-Held Remote Control
- Conspicuity Tape
- Pump Pressure Gauge
- Cab Cut Off Switch

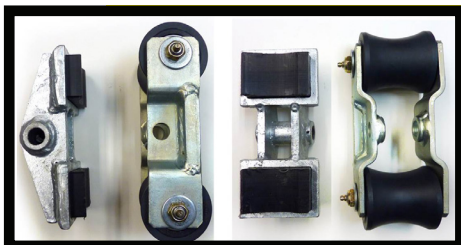


### Rollers OR Slide Pads

As an industry first, the BMR is available with rollers or slide pads

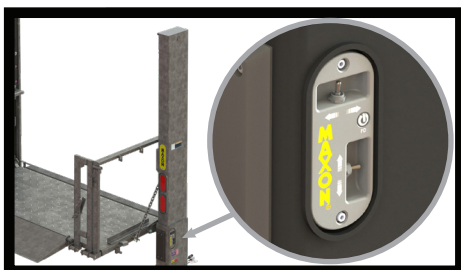

### New Switch Location

Control switch is located on the column and now features an optional power down on demand button

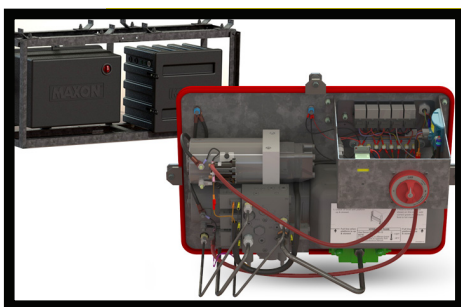

### New Pump Box / Hydraulic Design

Pump and battery box are mounted on a galvanized bolt-on hanger frame. Master disconnect switch is accessible from front of the pump box. Hydraulic components are mounted on a vertical plate that makes all components easily accessible for service



### Polyethylene Pads

Protect lower column areas from dock impacts



### Fully Galvanized - STANDARD

Galvanization is the process by which zinc is coated over corrosive (easily rusted) metals. The process of galvanizing not only protects from corrosion of various 'soft metals' but also adds strength to the original, uncoated metal

**Distributed by:**

M-214-0420



Maxon Lift Corp. 11921 Slauson Ave., Santa Fe Springs, CA 90670  
800.227.4116 Fax 888.771.7713, [www.maxonlift.com](http://www.maxonlift.com)