

RAILGATE SERIES - HIGH-CYCLE MODELS WITH BI-FOLD PLATFORMS

🔼 2500 & 3000 LBS CAPACITY



### BI-FOLD RAILGATE MODELS

The most versatile, dependable liftgates ever seen in a loading bay, Bi-Fold, High-Cycle models support large steel platforms and high lifting capacities while still remaining completely dock-compatible. The platform drop-down function allows work vehicles to load and unload in any manner at any location.

TKT-80-30 EA60

In the drop-away position, Bi-Fold Railgate platforms rest at bed height, allowing seamless dock compatibility.

The Low-Profile Control, a standard feature on all Tommy Gate Railgate models, includes an inactivity shut-off to guard against unauthorized use.



### BI-FOLD RAILGATE FEATURES


- A SAFETY TRIP BAR** disengages the lift when an object is detected between the rising platform and the liftgate mainframe
- B LOW-PROFILE CONTROL** reduced size simplifies operation
- C SELF-CLOSE ARM** cam-arm system opens/closes the platform automatically

TWO-YEAR STANDARD WARRANTY

**BI-FOLD, HIGH-CYCLE MODELS FOR 96- & 102-INCH WIDE BODIES<sup>1</sup>**

	Model Number	Body	Load Area	Taper <sup>2</sup>	Bed Heights <sup>3</sup>	Gate Weight
<b>2500 lb. Capacity</b>	<u>Treadplate Platforms</u>					
	<b>89-25 BF TP60</b>	96	83 x 60	13	34 - 54	1320
	<b>89-25 BF TP70</b>	96	83 x 70	13	38 - 54	1378
	<b>95-25 BF TP60</b>	102	89 x 60	13	34 - 54	1362
	<b>95-25 BF TP70</b>	102	89 x 70	13	38 - 54	1420
<b>3000 lb. Capacity</b>	<u>Treadplate Platforms</u>					
	<b>89-30 BF TP60</b>	96	83 x 60	13	34 - 54	1320
	<b>89-30 BF TP70</b>	96	83 x 70	13	38 - 54	1378
	<b>95-30 BF TP60</b>	102	89 x 60	13	34 - 54	1362
	<b>95-30 BF TP70</b>	102	89 x 70	13	38 - 54	1420

**BI-FOLD, HIGH-CYCLE RAILGATE DIMENSIONS**

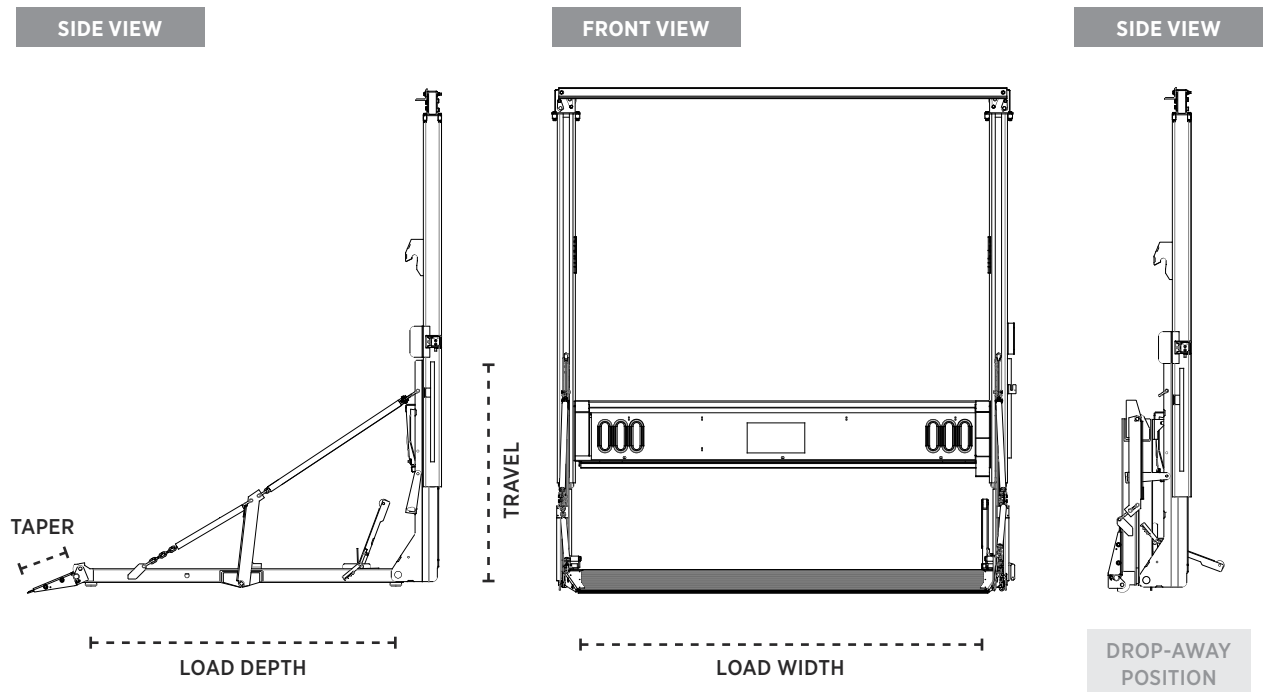

**IMPORTANT**

High-cycle railgate models are intended for use on medium-duty trucks only.

1. Bi-Fold, High-Cycle configurations for additional body widths may be available. Contact factory for details.
2. Standard, aluminum retention ramp serves as 13-inch, folding, platform taper on Bi-Fold Railgate models.
3. Minimum bed heights (laden), Maximum bed heights (unladen).