



RAM HYDRAULIC DRIVEN AIR COMPRESSOR


AIR COMPRESSOR			
Capacity (CFM)	125	160	185
Air (PSI)	100-150	100-150	100-150
Hydraulic (GPM)	27.6-29.2	36.8-38.3	42.2-44.2
Hydraulic Pressure (PSI)	2100-2620	2200-2700	2400-2830
Oil Capacity (Gal.) Initial Fill	2.5	2.5	2.5

Dry Weight (Lbs.): 453 (125-160 CFM), 453-491 (185 CFM)

GENAIR



RAM

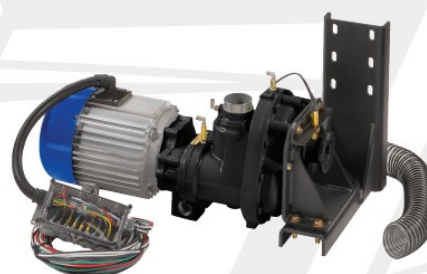

PTO SHAFT DRIVEN AIR COMPRESSOR & GENERATOR

AIR COMPRESSOR			
Capacity (CFM)	125	160	185
Air (PSI)	100-150	100-150	100-150
Compressor Input (RPM)	1535	1880	2160
Oil Capacity (Gal.) Initial Fill	2.5	2.5	2.5

Dry Weight (Lbs.): 513(min.) - 554 (max.)

GENERATOR (TEFC)			
Output (continuous)	6.6 kW	OR	9.6 kW
Voltage	120 or 120/240		120 or 120/240
Phase	Single Phase		Single Phase
Speed	3600 RPM		3600 RPM
Protection Degree	IP54		IP54
Type	Brushless AVR		Brushless AVR



PTO SHAFT DRIVEN AIR COMPRESSOR & GENERATOR

AIR COMPRESSOR		
Capacity (CFM)	125	160
Air (PSI)	100-150	100-150
Compressor Input (RPM)	1940	2435
Oil Capacity (Gal.) Initial Fill	2.5	2.5

Dry Weight (Lbs.): 449(min.) - 510(max.)

GENERATOR (TEFC)			
Output (continuous)	6.6 kW	OR	9.6 kW
Voltage	120 or 120/240		120 or 120/240
Phase	Single Phase		Single Phase
Speed	3600 RPM		3600 RPM
Protection Degree	IP54		IP54
Type	Brushless AVR		Brushless AVR

