


## METROPOLITAN EXPRESSWAY PLOW STANDARD FEATURES

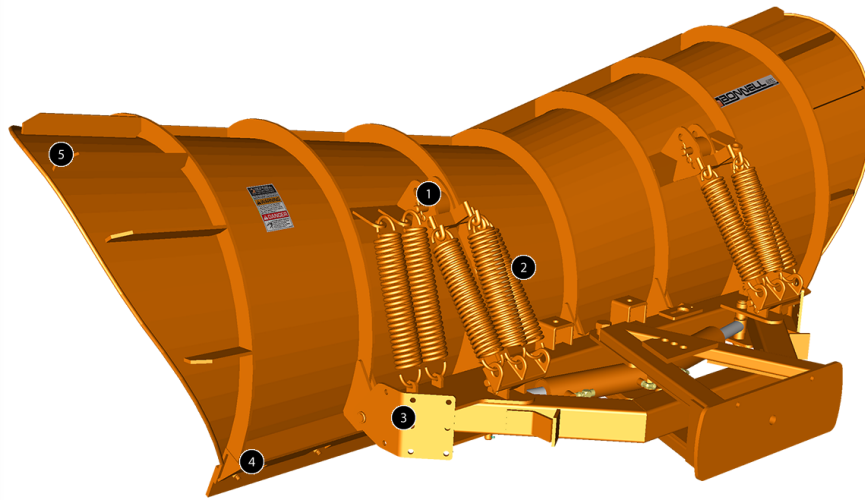

- 1. (3) Adjustable Pitch Setting
- 2. (2) Compression trip bars, with 3" rubber bushings top & bottom for return trip cushion
- 3. (5) Table Moldboard Hook-Up Points with 1/2" reinforced ribs, 3" Bearing Surface and 1-1/4" Pins
- 4. 7" x 4" x 1/2" fully boxed bottom angle
- 5. Extended moldboard continuously welded

## METROPOLITAN EXPRESSWAY PLOW SPECIFICATIONS

MODEL NUMBER	LENGTH	HEIGHT	APPROXIMATE WEIGHT	CUTTING SWATH @ 35°	CUTTING NUMBER EDGE LENGTH	CENTER HEIGHT	
10EW3648MC7	13'8"	36"	2005 LBS	8'2"	10'0"	36"	
11EW3649MC7	14'8"	36"	2082 LBS	9'0"	11'0"	36"	
12EW3650MC7	15'8"	36"	2169 LBS	9'10"	12'0"	36"	
10EW4052MC7	13'8"	42"	2075 LBS	8'2"	10'0"	40"	
11EW4053MC7	14'8"	42"	2155 LBS	9'0"	2209 LBS	40"	
12EW4053MC7	15'8"	42"	2244 LBS	9'10"	2276 LBS	40"	
10EP4760MC7	13'8"	49"	2195 LBS	8'2"	2190 LBS	47"	
11EW4761MC7	14'8"	49"	2273 LBS	9'0"	2260 LBS	47"	
12EW4762MC7	15'8"	49"	2367 LBS	9'10"	2330 LBS	47"	

\* longer lengths available upon request

<b>Moldboard Thickness:</b>	10 Gauge
<b>Moldboard Reinforcing:</b>	(7)-1/2" x 3" Ribs
<b>Adjustable Moldboard Pitch Setting</b>	25°, 15° or 5° off vertical
<b>Lower Reinforcing Angle:</b>	7" x 4" x 1/2" Fully Boxed with 3/8" x 6-3/4" Plate
<b>Reversing Frame:</b>	5' x 3-1/2" x 1/2" Angle Iron Sector
<b>Reversing Cylinders:</b>	Chrome 3" Bore x 10" Stroke (2" Rod) Double Acting
<b>Reversing Limits (left and right):</b>	0 to 35 degrees with Positive Stops
<b>Plow to Table Hinge Points:</b>	(5) 1-1/4" Hinge Pins, Spanning 90"
<b>Cutting Edge:</b>	5/8" x 6" High Carbon Steel
<b>Pivot Pin:</b>	1-1/4" Grade 8 Bolt
<b>Cylinder Pins:</b>	1" C1045 Steel Pins