


Sod Cutters

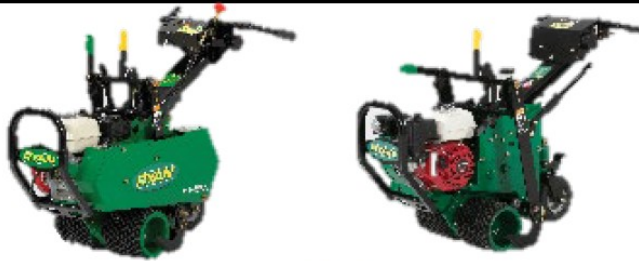

Quick Specs

| | <u>Jr. Sod Cutter</u> | <u>Jr. Sod Cutter- Hydro</u> |
|---------------------------------|--|---|
| Honda® Engine Model | 4-Cycle Honda® GX160; recoil start; on/off switch; low-oil alert | 4-Cycle Honda® GX160; recoil start; on/off switch; low-oil alert |
| Honda® Displacement | 9.9 cu in (163 cc) | 9.9 cu in (163 cc) |
| Honda® Fuel Capacity | 0.82 gal (3.1 L) | 0.82 gal (3.1 L) |
| Honda® Oil Capacity | 0.61 qt (0.58 L) | 0.61 qt (0.58 L) |
| Briggs & Stratton® Engine Model | 4-Cycle Vanguard™; Vanguard™ 200 Model 12V3; Recoil start; cyclonic air cleaner; integrated fuel valve/engine on/off switch | 4-Cycle Vanguard™; Vanguard™ 200 Model 12V3; Recoil start; cyclonic air cleaner; integrated fuel valve/engine on/off switch |
| B&S Displacement | 12.4 cu in (203 cc) | 12.4 cu in (203 cc) |
| B&S Fuel Capacity | 0.82 gal (3.1 L) | 0.82 gal (3.1 L) |
| B&S Oil Capacity | 0.63 qt (0.6 L) | 0.63 qt (0.6 L) |
| Clutch | Spring-loaded belt tightener | NA |
| Drive | V-belt engine to gear case, double roller chain to blade eccentric shaft, gears and roller chain to traction wheels, transmission has separate dog clutches to engage cutting blade and traction drive | Spring tension belt drives a Hydro-Gear® BDU hydrostat that transfers power through an enclosed oil lubricated gear and chain reduction to the drive wheels |
| Drive Wheel | Two 8 in (203 mm) diameter, knob tread; rubber-vulcanized to cast-iron hubs | Two 8 in (203 mm) diameter, knob tread; rubber-vulcanized to cast-iron hubs |
| Lubrication | Oil splash in gear case; grease fittings elsewhere | Oil splash in gear case; grease fittings elsewhere |
| Speed | Up to 135 ft/min (41 m/min) | Up to 352 ft/min (107 m/min) |
| Cutting Width | 12 in (305 mm) or 18 in (457 mm) | 18 in (457 mm) or 24 in (610 mm) |
| Cutting Thickness | Up to 2.5 in (64 mm), adjustable | Up to 2.5 in (64 mm), adjustable |
| Weight: Wet | 12 in Model; 333 lb (151 kg); 18 in Model (373 lb (169 kg) | 18 in Model 380 lb (172 kg); 24 in Model 398 lb (181 kg) |
| Width | 25 in (635 mm) | 25 in (635 mm) |
| Length | 53 in (1,346 mm) | 52.5 in (1,334 mm) |
| Height | 40 in (1,016 mm) | 35.5 in (902 mm) |
| Auto Cut-Off | NA | NA |
| Tires | Rear: 9 x 3.50-4 with sealed ball bearings | Rear: 9 x 3.50-4 with sealed ball bearings |