












To find more information visit <u>switchngo.com/products</u>



Interchangeable Truck Body System

HOIST SYSTEM

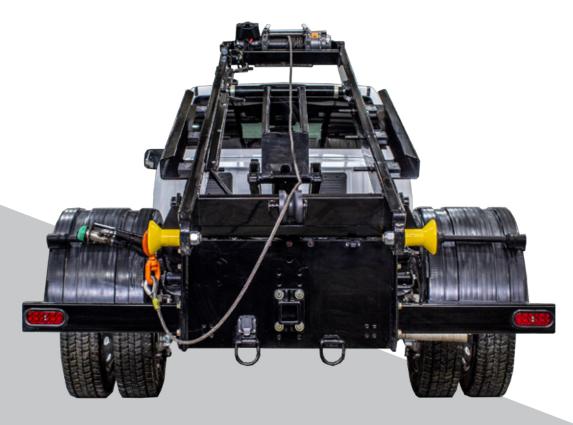



Body Hold Downs Universal design to secure

multiple body lengths* with one system Bodies must be system length or shorter



Swivel Hook Reduces cable stiffness for improved cable spooling and body attachment



Hook Point Integrated cable hook stowing on both sides of system





Pendant Control

Simple design for single-handed operation



Body Rollers

Single piece, self-greasing and bolt-on design for smooth rolling



Pump Cover Provides additional protection to the pump











V Roller

Slide Pads

Provide low friction body

on the system/body rails

support and reduced wear

Poly material to reduce excessive wear and extends cable life



Features

- Ideal for chassis cab vehicles with a GVWR of 13,500-33,000lbs
- Compatible with vehicles ranging from 60" CA to 138" CA
- Bolt on design allows for easy transfer between chassis
- Easy single handed operator controls with in-cab and on-hoist connection points
- Strong, lightweight system to maximize truck payload
- Variety of dump capacities up to 12.6 tons
- Hoist System can raise up to 50° dump angle
- Self-engaging front body Lock to secure body during transport and dumping





E Series | Is an electric powered hydraulic hoist system built for medium duty workloads and is ideal for class 4-7 chassis cab vehicles with a GVWR of 13,500lbs-26,000lbs. The system is designed to handle six fully loaded winch draws per day.*



Model Name	Dumping Capacity (tons)	Minimum CEF (in.)	Winch Capacity (Ibs)	Overhang Length (in.)	Typical CA (in.)
9-4016-15ES-11T	11.4	108" (9')	15,000	6″	60″
11-4016-15ES-9T	9.2	132" (11')	15,000	6″	84"-96"
11-4016-15E-10T	10.3	132" (11')	15,000	18″	84"-96"
11-4020-15E-12T	12.6	144" (12')	15,000	18″	84"-96"
12-4020-15E-11T	11.3	144" (12')	15,000	18″	96"-108"
14-4020-15E-9T	9.3	168" (14')	15,000	18″	120"-138"
14-5020-15E-10T	10.3	168" (14')	15,000	18″	120"-138"

*A fully loaded winch draw is equal to the rating of the winch, which is 15,000lbs. If you are loading 15,000lbs (body and payload), the system can pull six loads per day. If you are loading a lesser weight, the system will be able to pull more than six loads per day. For example, if your load is 10,000lbs (body and payload), the system can pull approximately 10 loads per day.

*Refer to your vehicle operator guide for manufacturer recommendations on GVWR



H Series | Is a full hydraulic hoist system built for heavy duty workloads and is ideal for class 5-7 chassis cab vehicles with a GVWR of 16,001lbs-33,000lbs



Model Name	Dumping Capacity (tons)	Minimum CEF (in.)	Winch Capacity (Ibs)	Overhang Length (in.)	Typical CA (in.)
11-4016-15H-10T	10.3	132" (11')	15,000	18″	84"-96"
11-4020-18H-12T	12.6	144" (12')	18,000	18″	84"-96"
12-4020-18H-10T	11.3	144" (12')	18,000	18″	96"-108"
14-5020-15H-10T	10.3	168" (14')	15,000	18″	120"-138"
14-5020-18H-10T	10.3	168" (14')	18,000	18″	120"-138"

Specifications are subject to change without notice. The Gross Vehicle Weight (GVW) or Gross axle weight rating (GAWR) will limit the operating capacity of the vehicle upfitted with a hoist system. For Switch-N-Go[®] product warranty information, please refer switchngo.com/warranty.

switchngo.com/hoistsystem



DUMP BODY






Features

- High quality zinc prime & powder coated finish
- Ramp gate for drive-on convenience
- Accepts underbody salt spreader
- 12" side height & 24" tailgate height
- Optional extended board pockets
- Standard 6" steel dump body ground rollers
- Custom options available

TO FIND A DEALER IN YOUR AREA

SWITCHNGO.COM/DEALER

Deist 607 Erie Street · Saegertown, PA 16433 INDUSTRIES, INC 888 311-0867







TRUCK BODY OPTIONS




Coal Chute





Welded D-rings

SPECIFICATIONS



	STANDARD DUTY	HEAVY DUTY	
FLOOR	10 GA	10 GA	
CROSSMEMBERS	3" STRUCTURAL CHANNEL 16" ON CENTER	3" STRUCTURAL CHANNEL 16" ON CENTER	
SIDES	12 GA SHEET		
TOP RAIL	3" X 3" X 1/8" TUBING		
BULKHEAD	INSIDE HEIGHT 39", 44", OR 51"		
TAILGATE	2" X 2" X 3/16" TUBING & 10GA SHEET		



DROP BOX





Features

- High quality zinc prime & powder coated finish
- Sloped front for easy clean out
- Two build grades available
- Standard 6" steel ground rollers
- Custom options available

TO FIND A DEALER IN YOUR AREA

SWITCHNGO.COM/DEALER








Curbside Door



Welded D-rings

Single swing or barn doors





	MEDIUM DUTY	HEAVY DUTY
FLOOR	10 GA	3/16"
SIDE POSTS	2-3 POSTS PER SIDE PER SIDE 12 GA SHEET	30"-36" ON CEN- TER POSTS 12 GA SHEET
CROSSMEMBERS	3" STRUCTURAL CHANNEL 16" ON CENTER	3" STRUCTURAL CHANNEL 12" ON CENTER
TOP RAIL	3" X 3" X 1/8" TUBING	
TAILGATE	3" STRUCTURAL CHANNEL 16" ON CENTER	3" STRUCTURAL CHANNEL 16" ON CENTER
SIDE HEIGHTS	39" & 51"	36" & 48"
SIDES/FRONT/TAILGATE	12 GA SHEET	
REAR CORNER POST	7 GA SHEET	

Specifications are subject to change without notice. For warranty information on this or any other Switch-N-Go* product please refer switchngo.com/warranty.

switchngo.com/drop-box




DUMPSTER BODY





Features

- High quality epoxy prime & wet paint black finish •
- Interior & bottom flat black primer •
- Sloped front for easy clean out •
- Single dumpster grade available •
- Standard 6" steel ground rollers



SPECIFICATIONS

	FORMED TOP RAIL	TUBING TOP RAIL	
TOP RAIL	FORMED TOP RAIL	3″ X 3″ x 1/8″ TUBING	
SIDE HEIGHT	53″	51″	
CROSS MEMBERS	FORMED 3" CROSS MEMBERS ON 18" CENTERS		
TAILGATE	2" X 2" X 1/8" TUBING TUBULAR FRAME WORK SINGLE SWING GATE		
SIDES/FRONT/TAILGATE	12 GA SHEET		
REAR CORNER POST	12 GA SHEET		
FLOOR	12 GA SHEET		
OPTIONS/D-RINGS/SEAM SEAL	N	ONE	
AVAILABLE SIZES	11′ 12′ 14′	11' 12' 14'	
APPROXIMATE HEAPED CUBIC YARDS	15YD 16YD 20YD	14YD 15YD 17YD	
WEIGHT	2,030lbs 2,160lbs 2,380lbs	2,080lbs 2,210lbs 2,440lbs	







ARBOR BODY WITH REMOVABLE ROOF





Features

- High quality zinc prime & powder coated finish
- Sloped front for easy clean out
- Rear gate available in three heights
- Removable chipper roof
- Standard 6" steel ground rollers
- Custom options available

TO FIND A DEALER IN YOUR AREA

SWITCHNGO.COM/DEALER









Optional 24" Rear Cover Plate




Single Swing or Barn Doors with Optional Chipper 39"/36" or 24" Heights



Removable Chipper Roof

SPECIFICATIONS



MEDIUM DUTY WITH REMOVABLE ROOF				
FLOOR	10 GA			
SIDE POSTS	2-3 POSTS PER SIDE 12 GA SHEET			
TAILGATE	2" X 2" X 1/8" TUBING TUBULAR FRAME WORK FORMED 12GA SHEET			
TOP RAIL	3" X 3" X 1/8" TUBING			
ROOF	12 GA SHEET 24" HIGH WITH TOP SUPPORT 2" X 2" X 1/8" AND 8" ANGLE EDGE MESH VENTS ON BOTH SIDES			
BULKHEAD	12 GA SHEET			



STORAGE

BODY

Interchangeable Truck Body System



Features

- High quality zinc prime & powder coated finish
- Lockable security-style doors
- 72" side height & 6" peak roof
- Standard 6" steel ground rollers
- Custom options available

TO FIND A DEALER IN YOUR AREA

SWITCHNGO.COM/DEALER





TRUCK BODY OPTIONS



Standard Exterior Posts



Optional Internal Posts




Lockable Security Style Doors



Welded D-rings

SPECIFICATIONS



EXTERIOR POST	12 GA WITH 5" FORMED POST ON 36"-48" CENTER
INTERIOR POST	3" STRUCTURAL CHANNEL
DOORS	LOCKABLE SECURITY-STYLE WITH 3" x 3" SUPPORTS
CROSSMEMBERS	3" STRUCTURAL CHANNEL ON 16" CENTER
PEAK ROOF	6" HIGH 12 GA SHEET
TOP RAIL	3" X 3" X 1/8" TUBING
FLOOR	10 GA SHEET
BULKHEAD	12 GA SHEET



Interchangeable Truck Body System

FLATBED







Features

- High quality zinc prime & powder coated finish
- Lightweight design
- 24" on center stake pockets
- Lasercut window in bulkhead
- 4-Corner chain keyholes
- Low profile 4" steel ground rollers
- Custom options available

Distributor Info:

TO FIND A DEALER IN YOUR AREA


SWITCHNGO.COM/DEALER









TRUCK BODY OPTIONS

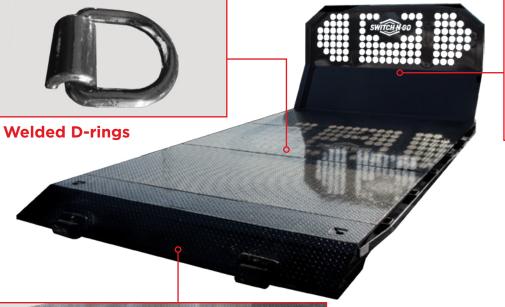




39" Height Bulkhead



51" Height Bulkhead



Optional No Beavertail w/ 6" Ground Rollers

9'-14' 94.5"

SPECIFICATIONS

	9-12' LENGTHS	13-15' LENGTHS	
FLOOR	1/8" DIAMOND PLATE	3/16" DIAMOND PLATE	
OUTER RAIL	3″ x 3″ x 1/8″ TUBING		
STAKE POCKETS	24" ON CENTER		
RUB RAIL	3/8" X 2" FLATBAR		
ROLLERS	INTEGRATED 4" X 6"	WIDE GROUND ROLLERS	
CROSSMEMBERS	3" STRUCTURAL CHANNEL ON 16" CENTERS		
KEYHOLES	LOCATED IN CORNERS	OF PLATFORM FLOOR	
	STANDARD BULKHEA	D HIGH BULKHEAD	
BULKHEAD WINDOW	\approx 3.8 SQ FEET AREA	\approx 4.4 SQ FEET AREA	



SUBFRAME







TO FIND A DEALER IN YOUR AREA

SWITCHNGO.COM/DEALER



Features


- High quality zinc prime &
- powder coated finish
- Lightweight design
- Rail Slides w/ no wheels
- Ideal for custom usage





Reinforced Plate

SPECIFICATIONS



	12' SUBFRAME 16' SUBFRAME
REINFORCED PLATE	7 GA WITH PLATE WITH 4" STRUCTURAL CHANNEL
OUTER RAIL	4" x 5.4# CHANNEL 5" x 6.7# CHANNEL
CROSSMEMBERS	3 " STRUCTURAL CHANNEL ON 13" CENTERS

Specifications are subject to change without notice. For warranty information on this or any other Switch-N-Go® product please refer switchngo.com/warranty.

switchngo.com/subframe



WORKREADY **SUBFRAME**





Features

- High quality zinc prime & powder coated finish
- Engineered to maximize legal payload
- Prevents material build-up
- 10,000lb maximum load operation

SWITCHNGO.COM/DEALER





Material Sprayer

SPECIFICATIONS

	9' 11' 12' 14' LENGTHS
MAXIMUM LOAD LIMIT	10,000LBS
ATTACHMENT POINTS	4 D-RINGS RATED AT 4080LBS EACH LOCATED IN CORNERS
SIDE DECK FLOOR	19" WIDE EXPANDED METAL 3/4"
CENTER FLOOR	WIDE DIAMOND SHEET 1/8"
LEGS	DETACH AND STOW
9' & 11' LENGTHS ONLY	26" WIDE X 9" REAR CUTOUT

Specifications are subject to change without notice. For warranty information on this or any other Switch-N-Go* product please refer switchngo.com/warranty.





Detachable 6" Ground Rollers

SEE THE POSSIBILITIES

Cold Mix / Patch

Hvdroseede

N

Sand Blaster / Compressor

Fuel / Lube Unit

Liquid Application



Seal / Asphalt Coating

D-ring Mounts



Simple Frame Bulkhead for





Expanded Steel Side-deck











STICINCO

MULCH MATE BODY

ICH NATE ----

MULCH MATE

DS1000






Features

- Designed for use with Mulch Mate® DS1000
- Retractable legs for off truck use and off season storage

- Curb Side Door for access to the front of the container
- High quality powder coating finish
- Available in 11' & 14' lengths





FOR PRICING & INFO, PLEASE VISIT




PARTNERSHIP WITH



TRUCK BODY OPTIONS

MULCH MATE




Curbside Door



MULCH MATE

Compatible with Mulch Mate DS1000

SPECIFICATIONS



	11'	14'	
FLOOR	10 GA		
SIDES	12 GA		
SIDE HEIGHT	42"		
LEGS	(4) RETRACTABLE LEGS		
CROSSMEMBERS	FORMED & INTEGRATED FOR ADDED STRENGTH		
CURB SIDE DOOR	52"W x 42"H W/ LATCHING MECHANISM & SAFETY CHAIN		
REAR POSTS	1/4" THICK FOR ADDED STRENGTH		
HOIST COMPATIBILITY	11'	14'	



STAINLESS STEEL DUMP BODY







- Superior Corrosion Protection
- Double Acting Tailgate
- Manual Front Release
- Bottom Painted Black
- Available in 11' and 14' lengths



Deist 607 Erie Street · Saegertown, PA 16433






Manual Front Release



Tailgate

Drop Down Sides (optional)

SPECIFICATIONS



	11′	14′
FLOOR	10 GA 304 STAINLESS STEEL	
SIDES/FRONT/TAILGATE	10 GA 304 STAINLESS STEEL	
TAILGATE HEIGHT	26″ HIGH	
SIDE HEIGHT	14″ HIGH	
BULKHEAD	INSIDE HEIGHT 39" OR 51"	
BOARD POCKETS	6" HIGH	
D-RINGS	1 ON EACH CORNER	
OPTIONS	DROP DOWN SIDES (14' LENGTH SPLIT SIDES) BOLT ON 1/8" STAINLESS STEEL CAB SHIELD	
HOIST COMPATIBILITY	11' 14'	

Specifications are subject to change without notice. For warranty information on this or any other Switch-N-Go* product please refer switchngo.com/warranty.

switchngo.com/stainless-steel-dump

- - -



SALT SPREADER BODY





Features

- Superior Weight Distribution as compared to non-specialized upfits
- 4.8 Cubic Yard 304 Stainless Steel V-Box
- 12" Angled Front Extension
- 9" Rear Cutout for Conveyor
- Sloped Front Design
- Retractable Legs for interchangebility & storage without removing the chute
- 10,000lb maximum load operation
- Expanded metal subframe floor to prevent material buildup











9" Rear Cutout for Conveyor



12" Angled Front Extension



Detachable Ground Rollers



Electric Conveyor and Spinner



Retractable Legs

SPECIFICATIONS

		o [#]

	11' LENGTH ONLY	
WORKING LOAD LIMIT	10,000LBS	
SPREADER CAPACITY	4.8YD	
ATTACHMENT POINTS	4 D-RINGS RATED AT 4080LBS	
FLOOR	SIDE 19" WIDE EXPANDED METAL 3/4" CENTER 40" WIDE DIAMOND SHEET 1/8"	
REAR CUTOUT	26" WIDE X 9" DEEP	
LEGS	DETACH AND STOW	
SPREADER CONVEYOR	ELECTRIC	

Specifications are subject to change without notice. For warranty information on this or any other Switch-N-Go® product please refer switchngo.com/warranty.

-0





UFRAMARG

VAN BODY





- Lightweight Design for Additional Payload
- Superior Corrosion Resistance
- Single Rear Roll-Up Door
- Fully Enclosed Unit for Cargo Protection
- Smooth Sides for Additional Advertising
- Available in 12', 13' & 15' lengths to be compatible with 11', 12' & 14' Switch-N-Go hoist systems.*

*Not compatible with S-Model








TRUCK BODY FEATURES



Bolt-on Aluminum Pullout Ladder





	12′	13′	15′
FLOOR	TONGUE & GROOVE EXTRUDED ALUMINUM		
REAR ROLL-UP DOOR	86″W x 77″H		
INTERIOR SIDES	1/2" PLYWOOD WITH E-TRACK		
SIDE HEIGHT	83″		
CROSSMEMBERS	12" ON CENTERS		
D-RINGS	(4) ON FLOOR		
HOIST COMPATIBILITY	11′	12′	14'



ARBOR BODY






8

• Fully enclosed container for cargo protection

Ы

- Smooth sides for advertising
- Coal tar epoxy corrosion resistant bed liner
- Tool & Ladder Boxes for additional storage
- Undercoated Floor and Toolboxes
- Lockable 30" high swing style tailgate
- Weather- and Debris-Resistant Lights & Wiring Harness
- Installed Lighting Kit
- Available in 12' & 15' lengths to be compatible with 11' & 14' Switch-N-Go® hoist systems*

*Not compatible with S-Model









TRUCK BODY OPTIONS



Weather and **Debris-Resistant Lights**


đ,

Ladder Box



Venting

Side Tool Box




	12′	15′	
FLOOR	10 GA GALVANNEAL		
TAILGATE	LOCKABLE 30" HIGH SWING STYLE		
ROOF	14 GA GALVANNEAL		
SIDES	12 GA GALVANNEAL		
SIDE HEIGHT	66" HIGH	72″ HIGH	
SIDE TOOL BOX	29"H x 26.5"W x 96" L		
LADDER BOX	38″H x 13″W x 117.5″ L		
VENTING	(4) PER SIDE		
LIGHTING KIT	INSTALLED (REQUIRES FINISH WIRING)		
HOIST COMPATIBILITY	11′	14′	

SPECIFICATIONS



Interchangeable Truck Body System

HOIST SYSTEM

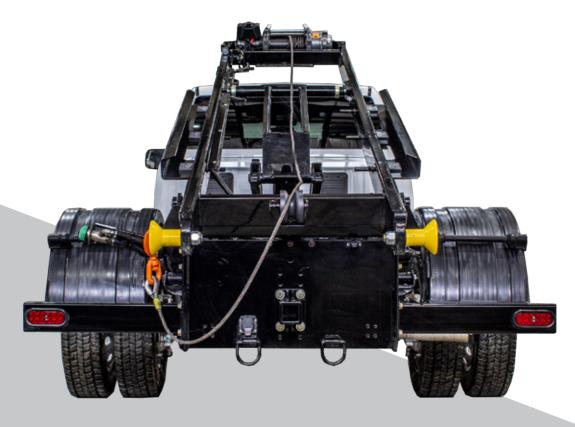



Body Hold Downs Universal design to secure


multiple body lengths* with one system Bodies must be system length or shorter



Swivel Hook Reduces cable stiffness for improved cable spooling and body attachment



Hook Point Integrated cable hook stowing on both sides of system





Slide Pads

Provide low friction body support and reduced wear on the system/body rails



Electronics System Fully enclosed and waterproof junction box with an IP 66 rating



V Roller

Poly material to reduce excessive wear and extends cable life



Pendant Control

Simple design for single-handed operation



Body Rollers

Single piece, self-greasing and bolt-on design for smooth rolling





Deist 607 Erie Street · Saegertown, PA 16433 switchngo.com



Switchngo.com • 888-311-0867 607 Erie Street Saegertown, Pennsylvania 16433