


KNAPHEIDE - STEEL SERVICE BODIES SPECIFICATIONS - 600 SERIES

// 60" CA SINGLE REAR WHEEL


MODEL	TYPE	HEIGHT	WEIGHT
6108F40	Flip Top (H)	41.25"	1374lb.

Note: Chassis with GVWRR 10,000 lb. and under subject to curb weight limits.
Not all engine/drive and body combinations are applicable.

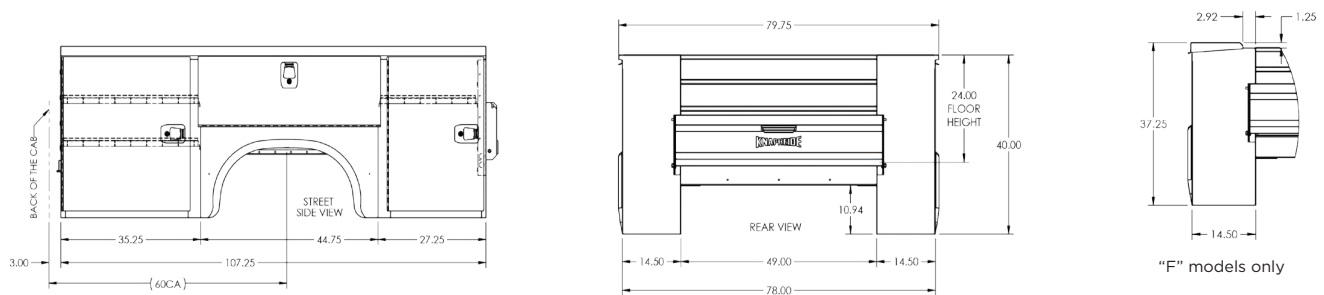


SIX-YEAR, LIMITED WARRANTY

STEEL SERVICE BODIES




NO RUST
THROUGH



DOOR HINGES WILL
NOT FAIL OR COME
OFF BODY



LATCHES AND LOCK
CYLINDERS WILL NOT
FAIL TO OPERATE



SHELVES WILL NOT
BEND UNDER MAX.
LOAD OF 250 LBS.

Visit www.knapheide.com/warranty for more information.

STEEL SERVICE BODIES

With a rugged steel construction and external storage for your tools and equipment, the Service Body is a key component in your day-to-day productivity.

The external compartments offer protection from outside elements and allow technicians to access their equipment without having to climb into the truck bed.

Staying organized both on and between job sites is important. Get maximum efficiency with a Knapheide Service Body.




6108F40
*Body may be shown
with optional features

STANDARD SHELVING

All Knapheide Service Bodies come with the following standard shelving units:

- Two adjustable divider shelves and dividers, in the street and curb side front vertical compartments (1st and 2nd vertical 132" bodies only)
- One adjustable divider shelf and dividers in the street and curb side full height rear vertical compartments
- One adjustable divider shelf and dividers in the curb side horizontal compartment


STANDARD FEATURES




A Features 14-gauge, two-sided A-40 galvalume steel shell



H Features double-shell, 20-gauge, two-sided A-40 galvalume steel compartment doors



B Exclusive "Return Flange" floor design provides support



I Automotive-quality, rotary-style latches make opening and closing easy



C Interior light guards protect recessed lighting and wiring



J Interior cover protects internal latch from damage



D Continuous stainless steel hinges are pry-proof and corrosion-resistant



K Neoprene door seals protect compartments from the weather



E Adjustable security ring strikers provide a weather-tight seal



L Quick-mount installation allows for fast, safe mounting



F Includes 250-lb. capacity adjustable divider shelves



M Includes slam-lock tailgate with one-hand center release



G Double-spring over-center door retainer eliminates involuntary door swing



N Upgraded surface mount lighting system features LED S/T/T and B/U, LED strobe option* with (8) selectable patterns, and built-in reflectivity for additional safety**

*Additional wire harness required for strobe lights
**Covered under 3-year limited warranty

// E-COAT PROTECTION:

Electrodeposition prime-paint system provides superior corrosion resistance