

STANDARD CHASSIS SPECIFICATIONS

STANDARD CHASSIS SPECIFICATIONS

HV507 SFA


MODEL CODE: HV507

Rating		4x2	6x4	4x4	6x6
Min GAW	front	10,000	10,000	10,000	10,000
Min GAW	rear	17,500	34,000	17,500	34,000
Min GVW	total	27,500	44,000	27,500	44,000
Max GAW	front	22,000	22,000	20,000	20,000
Max GAW	rear	31,000	46,000	31,000	46,000
Max GVW	total*	53,000	68,000	51,000	66,000
Min GCW	—	50,000	66,000	50,000	66,000
Max GCW	—	66,000	80,000	66,000	80,000


NOTE: 4x2 Axle Configuration is Standard

* = Maximum GVWR limited to 37,000 lbs. with Cummins B6.7 engine.

NOTE: Model Code and Wheelbase Must Be Specified on Order.

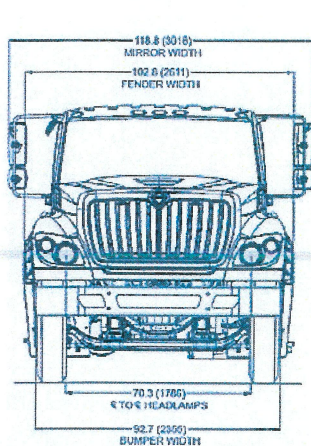

hv_md_front

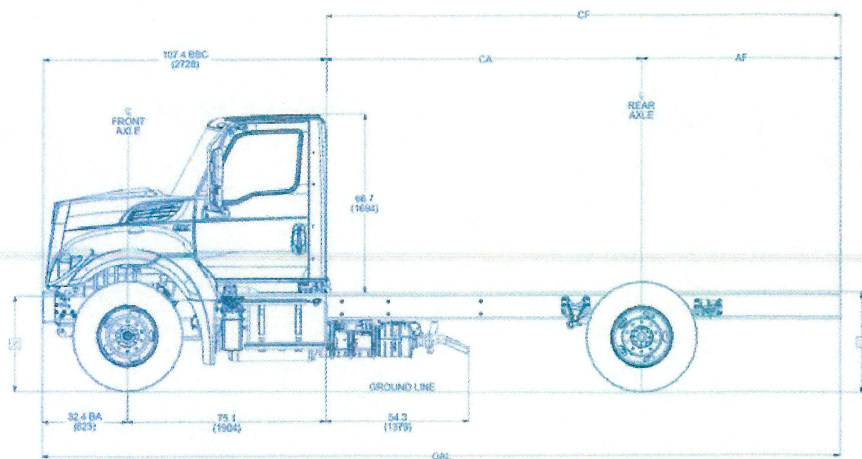

HV507_4x2_day_cab_lsv

Wheelbase (in.)	Chassis Weight (lbs.) **			Dimensions (in.)				Turning Radius	
	Front	Rear	Total	CA	CF	AF	OAL	Curb Clearance	Wall Clearance
136				61	100	39	207	20 ft. 1 in.	21 ft. 4 in.
*148	5,783	3,857	9,640	73	112	39	219	21 ft. 7 in.	22 ft. 10 in.
160				85	148	63	255	23 ft. 0 in.	24 ft. 4 in.
177				102	165	63	272	25 ft. 2 in.	26 ft. 5 in.
183				108	171	63	278	25 ft. 11 in.	27 ft. 2 in.
195				120	195	75	302	27 ft. 4 in.	28 ft. 8 in.
213				138	213	75	320	28 ft. 10 in.	30 ft. 1 in.
226				151	247	96	354	30 ft. 5 in.	31 ft. 8 in.
244				169	265	96	372	32 ft. 7 in.	33 ft. 10 in.
262				187	283	96	390	34 ft. 9 in.	36 ft. 0 in.

NOTE: Data and diagram based on vehicle with standard equipment. Artwork may show some optional equipment.

* Dimension data and optional add-on weights for this model are based on the 148" wheelbase.

** Weight includes standard chassis, standard tires, oil and water, but less fuel.

[2] Frame Height at centerline of front axle: unloaded - 37.5", loaded - 35.3"

[3] Frame Height at centerline of rear axle: unloaded - 40.5", loaded - 36.3"

NOTE: Due to internal spring friction and manufacturing tolerances, these values may vary up to 0.5 inches. To achieve these nominal values directly after loading or unloading a vehicle, it may be necessary to drive the vehicle for a short period.

**INTERNATIONAL®****HV****SERIES MEDIUM DUTY****HV507 SFA****STANDARD EQUIPMENT****MODEL CODE: HV50700****01 FRAMES**01ANA - AXLE CONFIGURATION
{Navistar} 4x2**NOTE:** Pricing may change if
axle configuration is
changed.01CAD - FRAME RAILS High
Strength Low Alloy Steel
(80,000 PSI Yield); 10.250"
x 3.092" x 0.375" (260.4mm x
78.5mm x 9.5mm); 455.0"
(11557mm) Maximum OAL01LLA - BUMPER, FRONT Swept
Back, Steel, Heavy Duty01WEV - WHEELBASE RANGE 146"
(370cm) Through and
Including 195" (495cm)**02 AXLE, FRONT**02ARX - AXLE, FRONT NON-DRIVING
{Meritor MFS-10-143A} Wide
Track, I-Beam Type,
10,000-lb Capacity**03A SUSPENSION, FRONT**03ADB - SUSPENSION, FRONT,
SPRING Parabolic Taper Leaf,
Shackle Type, 10,000-lb
Capacity, with Shock
Absorbers**04 BRAKES**04091 - BRAKE SYSTEM, AIR Dual
System for Straight Truck
Applications* BRAKE LINES Color and Size
Coded Nylon

* DRAIN VALVE Twist-Type

* GAUGE, AIR PRESSURE (2) Air
1 and Air 2 Gauges;
Located in Instrument
Cluster* PARKING BRAKE CONTROL
Yellow Knob, Located on
Instrument Panel* PARKING BRAKE VALVE For
Truck* QUICK RELEASE VALVE On Rear
Axle for Spring Brake
Release: 1 for 4x2, 2 for
6x4* SPRING BRAKE MODULATOR
VALVE {Bendix} R-7 for
4x2, SR-7 with relay valve
for 6x4/8x604AZA - AIR BRAKE ABS {Bendix
AntiLock Brake System}
4-Channel (4 Sensor/4
Modulator) Full Vehicle
Wheel Control System04XCJ - BRAKES, FRONT {Bendix
Spicer ADB22X} Air Disc
Type, Extended Service, Size
22.5", 23,000-lb Capacity04XDW - BRAKE CHAMBERS, FRONT
AXLE 18 Sqn, for Air Disc
Brakes**04 BRAKES**04XCK - BRAKES, REAR {Bendix
Spicer ADB22X} Air Disc
Type, Extended Service, Size
22.5", 26,000-lb Capacity
per Axle04XEA - BRAKE CHAMBERS, REAR
AXLE 18/24 Sqn Spring
Brake, Double Diaphragm, for
Air Disc Brakes04SPA - AIR COMPRESSOR
{Cummins} 18.7 CFM04VKH - AIR TANK LOCATION (2)
Mounted Under Battery Box,
Outside Right Rail, Under
Cab04732 - DRAIN VALVE {Berg} with
Pull Chain, for Air Tank**05 STEERING**05PSA - STEERING GEAR {Sheppard
M100} Power05AAA - STEERING COLUMN
Stationary05CAW - STEERING WHEEL 4-Spoke;
18" Dia., Black**06 DRIVELINES*** END YOKES Half-Round, Easy
Service (All)06DGA - DRIVELINE SYSTEM {Dana
Spicer} SPL100, for 4x2/6x2**07 EXHAUST SYSTEM**07BME - EXHAUST SYSTEM
Horizontal Aftertreatment
System, Frame Mounted Under
Right Rail Back of Cab,
Includes Single Short
Horizontal Tail Pipe**08 ELECTRICAL**

08000 - ELECTRICAL SYSTEM

12-Volt, Standard Equipment

* DATA LINK CONNECTOR For
Vehicle Programming and
Diagnostics In Cab* HAZARD SWITCH Push On/Push
Off, Located on Instrument
Panel to Right of Steering
Wheel* HEADLIGHT DIMMER SWITCH
Integral with Turn Signal
Lever* PARKING LIGHT Integral with
Front Turn Signal and Rear
Tail Light* STARTER SWITCH Electric,
Key Operated* STOP, TURN, TAIL & B/U
LIGHTS Dual, Rear,
Combination with Reflector* TURN SIGNAL SWITCH
Self-Cancelling for
Trucks, Manual Cancelling
for Tractors, with Lane
Change Feature* WINDSHIELD WIPER SWITCH
2-Speed with Wash and
Intermittent Feature (5
Pre-Set Delays), Integral
with Turn Signal Lever

(CONT.)

08 ELECTRICAL

(CONT.)

* WINDSHIELD WIPERS Single
Motor, Electric, Cowl
Mounted* WIRING, CHASSIS Color Coded
and Continuously Numbered

08GXD - ALTERNATOR

{Leece-Neville AVI160P2013}
Brush Type, 12 Volt, 160 Amp
Capacity, Pad Mount, with
Remote Sense08TTR - BATTERY BOX Steel, with
Plastic Cover, 30" Wide, 2-4
Battery Capacity, Mounted

Right Side Under Cab

08MJP - BATTERY SYSTEM

{Fleetrite}
Maintenance-Free, (?)
12-Volt 1320CCA Total, Top
Threaded Stud

08XAH - CIRCUIT BREAKERS

Manual-Reset (Main Panel)

SAE Type III with Trip
Indicators, Replaces All
Fuses

08WPH - CLEARANCE/MARKER LIGHTS

(5) {Truck Lite} Amber LED
Lights, Flush Mounted on Cab
or Sunshade08VAY - HORN, ELECTRIC Disc
Style08WWJ - INDICATOR, LOW COOLANT
LEVEL with Audible Alarm08RMX - RADIO Omit, Includes
Wiring and Antenna

08RMS - SPEAKERS Omit

08XKL - STARTING MOTOR
{Mitsubishi Electric
Automotive America 90P47}
12-Volt, with Soft-Start08XGT - TURN SIGNALS, FRONT
Includes LED Side Turn
Lights Mounted on Fender**09 FRONT END**09WBC - FRONT END Tilting,
Fiberglass, with Three Piece
Construction, for
WorkStar/HV09HBM - GRILLE Stationary,
Chrome09AAB - LOGOS EXTERIOR Model
Badges09AAE - LOGOS EXTERIOR, ENGINE
Badges**10 PAINT & MISCELLANEOUS**10060 - PAINT SCHEMATIC, PT-1
Single Color, Design 100* PAINT SCHEMATIC ID LETTERS
"WK"10761 - PAINT TYPE Base
Coat/Clear Coat, 1-2 Tone**11 CLUTCH**11001 - CLUTCH Omit Item
(Clutch & Control)

Refer To General Info for Metric Conversion Tables

INTERNATIONAL® HV
PLM-282 REVISION NO. 104**SERIES SECTION 190 - STANDARD EQUIPMENT**
PAGE 190-2**01/04/2021**
SUBJECT TO CHANGE WITHOUT NOTICE
All Taxes Extra, when Applicable

Printed in the United States of America

**INTERNATIONAL®****HV****SERIES MEDIUM DUTY****HV507 SFA****STANDARD EQUIPMENT****MODEL CODE: HV50700****12 ENGINE**

12ERC - ENGINE, DIESEL {Cummins B6.7 200} EPA 2021, 200HP @ 2400 RPM, 520 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 200 Peak HP (Max)

12UWY - RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler

* DEAERATION SYSTEM with Surge Tank

* HOSE CLAMPS, RADIATOR HOSES {Gates} Shrink Band Type; Thermoplastic Coolant Hose Clamps

* RADIATOR HOSES Premium, Rubber

12THT - FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed

* FAN Nylon

12VBC - AIR CLEANER Single Element

12703 - ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection

12VXT - THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

13 TRANSMISSION

13ASL - TRANSMISSION, AUTOMATIC {Allison 2500 HS} 5th Generation Controls, Wide Ratio, 5-Speed with Overdrive, Less PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max

13WVV - NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

14A AXLE, REAR

14ANP - AXLE, REAR, SINGLE {Meritor MS-17-14X-3DFL} Single Reduction, 17,500-lb Capacity, 190 Wheel Ends

* RATIO: 2.64, 3.08, 3.25, 3.36, 3.42, 3.55, 3.70, 3.90, 4.11, 4.33, 4.63, 4.88, 5.13, 5.29, 5.57, 5.86, 6.14, 6.43, 6.83 OR 7.17

14B SUSPENSION, REAR

14SAH - SUSPENSION, REAR, SINGLE 18,500-lb Capacity, Vari-Rate Springs

15 FUEL TANKS

15SWU - FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 40 US Gal (151L), Mounted Left Side, Under Cab

15WDG - DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab

15LNL - FUEL/WATER SEPARATOR {Racor 400 Series} with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine

16 CAB

16030 - CAB Conventional, Day Cab

16ZBT - ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab

16VKB - CAB INTERIOR TRIM Classic, for Day Cab

* CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger

* DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted

* SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap

16WSK - CAB REAR SUSPENSION Air Bag Type

16GDC - GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 3 Inch Monochromatic Text Display

16BAL - HEATER

16XJN - INSTRUMENT PANEL Flat Panel

16HKT - IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

16SNL - MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width

NOTE: Mirror Dimensions are Rounded to the Nearest 0.5"

- For U.S. Only

16 CAB**(CONT.)**

16JXG - SEAT, FRONT BENCH {National} Full Width;

Vinyl, with Fixed Mid Back

16XCK - WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors

27/28 WHEELS & TIRES

27DTU - WHEELS, FRONT {Accuride 29001} DISC, 22.5x7.50 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

28DTU - WHEELS, REAR {Accuride 29001} DUAL DISC; 22.5x7.50 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

737213 5415 (02) 11R22.5 14-PR LR-G SINGLE FRONT RADIAL TIRES {Continental Tire HSR2}

737213 5415 (04) 11R22.5 14-PR LR-G DUAL REAR RADIAL TIRES {Continental Tire HSR2}

40 WARRANTY

40128 - WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A

Refer To General Info for Metric Conversion Tables

INTERNATIONAL® HV SERIES SECTION 190 - STANDARD EQUIPMENT

PLM-282 REVISION NO. 104

PAGE 190-3

SUBJECT TO CHANGE WITHOUT NOTICE

01/04/2021

Printed in the United States of America

All Taxes Extra, when Applicable

<u>Code</u>	<u>Description</u>
HV50700	Base Chassis, Model HV507 SFA with 175.00 Wheelbase, 100.00 CA, and 75.00 Axle to Frame
1ANA	AXLE CONFIGURATION {Navistar} 4x2
1CAD	FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield); 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm); 455.0" (11557mm) Maximum OAL
1LLA	BUMPER, FRONT Swept Back, Steel, Heavy Duty
1WEV	WHEELBASE RANGE 146" (370cm) Through and Including 195" (495cm)
2ARX	AXLE, FRONT NON-DRIVING {Meritor MFS-10-143A} Wide Track, I-Beam Type, 10,000-lb Capacity
3ADB	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 10,000-lb Capacity, with Shock Absorbers
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
4732	DRAIN VALVE {Berg} with Pull Chain, for Air Tank
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM
4VKH	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Under Cab
4XCJ	BRAKES, FRONT {Bendix Spicer ADB22X} Air Disc Type, Extended Service, Size 22.5", 23,000-lb Capacity
4XCK	BRAKES, REAR {Bendix Spicer ADB22X} Air Disc Type, Extended Service, Size 22.5", 26,000-lb Capacity per Axle
4XDW	BRAKE CHAMBERS, FRONT AXLE 18 SqIn, for Air Disc Brakes
4XEA	BRAKE CHAMBERS, REAR AXLE 18/24 SqIn Spring Brake, Double Diaphragm, for Air Disc Brakes
5AAA	STEERING COLUMN Stationary
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PSA	STEERING GEAR {Sheppard M100} Power
6DGA	DRIVELINE SYSTEM {Dana Spicer} SPL100, for 4x2/6x2
7BME	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Under Right Rail Back of Cab, Includes Single Short Horizontal Tail Pipe
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
8GXD	ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense
8MJP	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (2) 12-Volt 1320CCA Total, Top Threaded Stud
8RMS	SPEAKERS Omit
8RMX	RADIO Omit, Includes Wiring and Antenna
8RPP	ANTENNA Shark Fin, Roof Mounted
8TTR	BATTERY BOX Steel, with Plastic Cover, 30" Wide, 2-4 Battery Capacity, Mounted Right Side Under Cab
8VAY	HORN, ELECTRIC Disc Style
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

<u>Code</u>	<u>Description</u>
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XKL	STARTING MOTOR {Mitsubishi Electric Automotive America 90P47} 12-Volt, with Soft-Start
8XNY	HEADLIGHTS Halogen
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HBM	GRILLE Stationary, Chrome
9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12EMZ	VENDOR WARRANTY, ENGINE {Cummins} B6.7 Engine, 3-Year Unlimited Miles Standard Warranty
12ERC	ENGINE, DIESEL {Cummins B6.7 200} EPA 2021, 200HP @ 2400 RPM, 520 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 200 Peak HP (Max)
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed
12UWZ	RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler
12VBC	AIR CLEANER Single Element
12VHP	EMISSION, CALENDAR YEAR {Cummins B6.7} EPA, OBD and GHG Certified for Calendar Year 2021
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYP	ENGINE CONTROL, REMOTE MOUNTED No Provision for Remote Mounted Engine Control
12WZE	CARB IDLE COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations
12XCS	CARB EMISSION WARR COMPLIANCE Federal, Does Not Comply with CARB Emission Warranty
13ASL	TRANSMISSION, AUTOMATIC {Allison 2500 HS} 5th Generation Controls, Wide Ratio, 5-Speed with Overdrive, Less PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max
13WLN	TRANSMISSION OIL Synthetic; 20 thru 28 Pints
13WVS	TRANSMISSION SHIFT CONTROL T-Handle
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released
13WYY	SHIFT CONTROL PARAMETERS {Allison} 1000 or 2000 Series Transmissions, Performance Programming
14ANV	AXLE, REAR, SINGLE {Meritor MS-21-14X-4DFR} Single Reduction, 21,000-lb Capacity, R Wheel Ends . Gear Ratio: 5.57
14SAH	SUSPENSION, REAR, SINGLE 18,500-lb Capacity, Vari-Rate Springs
15LMS	FUEL/WATER SEPARATOR 12 VDC Electric Heater, Includes Pre-Heater, Includes Water-in-Fuel Sensor, Cummins Supplied on Engine
15SWU	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 40 US Gal (151L), Mounted Left Side, Under Cab

<u>Code</u>	<u>Description</u>
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
16400	SEAT, PASSENGER Omit Item
16BAL	HEATER
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16JXG	SEAT, FRONT BENCH {National} Full Width; Vinyl, with Fixed Mid Back
16SNL	MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width
16VKB	CAB INTERIOR TRIM Classic, for Day Cab
16WSK	CAB REAR SUSPENSION Air Bag Type
16XCK	WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors
16XJN	INSTRUMENT PANEL Flat Panel
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab
27DTU	WHEELS, FRONT {Accuride 29001} DISC; 22.5x7.50 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DTU	WHEELS, REAR {Accuride 29001} DUAL DISC; 22.5x7.50 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
7372138132	(2) TIRE, FRONT 11R22.5 Load Range G ENDURANCE RSA (GOODYEAR), 496 rev/mile, 75 MPH, All-Position
7372138132	(4) TIRE, REAR 11R22.5 Load Range G ENDURANCE RSA (GOODYEAR), 496 rev/mile, 75 MPH, All-Position

Services Section:

40128	WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A
	VA Sheriff's Fee for Bid (.0075 of List Price + Freight) \$105,698.00 rounded up
	Commodity Surcharge

(US DOLLAR)	
<u>Description</u>	<u>Price</u>
Total Factory List Price Including Options:	\$102,348.00
Total Goods Purchased:	\$1,543.00
Freight	
Total Freight:	\$2,600.00
Total Factory List Price Including Freight:	\$106,491.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

Norfolk Truck Center, Inc.
736 Tidewater Drive
Norfolk VA 23504 -
(757)622-3246

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.