

STANDARD CHASSIS SPECIFICATIONS

STANDARD CHASSIS SPECIFICATIONS

HV607 SBA


MODEL CODE: HV607

Rating		4x2	4x4	6x4	6x6
Min GAW	front	10,000	13,000	12,000	13,000
Min GAW	rear	17,000	17,000	34,000	34,000
Min GVW	total	27,000	30,000	46,000	47,000
Max GAW	front	20,000	18,000	22,000	18,000
Max GAW	rear	31,000	31,000	46,000	46,000
Max GVW	total*	51,000	49,000	68,000	64,000
Min GCW	—	50,000	—	66,000	—
Max GCW	—	66,000	—	80,000	—


NOTE: 4x2 Axle Configuration is Standard

* = Maximum GVWR limited to 37,000 lbs. with Cummins B6.7 engine.

NOTE: Model Code and Wheelbase Must Be Specified on Order.

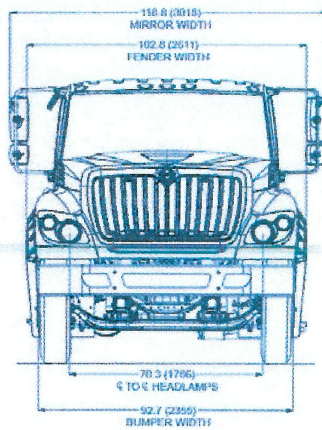

hv_md_front

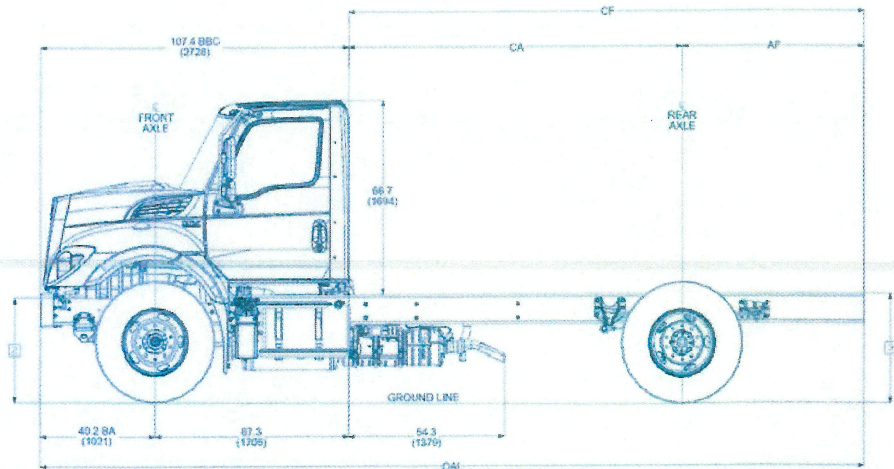

HV607_4x2_day_cab_lsv

Wheelbase (in.)	Chassis Weight (lbs.) **			Dimensions (in.)				Turning Radius	
	Front	Rear	Total	CA	CF	AF	OAL	Curb Clearance	Wall Clearance
128				61	100	39	207	19 ft. 1 in.	20 ft. 9 in.
*140	6,136	3,644	9,780	73	112	39	219	20 ft. 7 in.	22 ft. 3 in.
152				85	148	63	255	22 ft. 1 in.	23 ft. 9 in.
169				102	165	63	272	24 ft. 2 in.	25 ft. 10 in.
175				108	171	63	278	24 ft. 11 in.	26 ft. 7 in.
187				120	195	75	302	26 ft. 5 in.	28 ft. 1 in.
205				138	213	75	320	27 ft. 10 in.	29 ft. 6 in.
217				150	246	96	353	29 ft. 4 in.	31 ft. 0 in.
236				169	265	96	372	31 ft. 7 in.	33 ft. 3 in.
254				187	283	96	390	33 ft. 9 in.	35 ft. 5 in.

NOTE: Data and diagram based on vehicle with standard equipment. Artwork may show some optional equipment.

* Dimension data and optional add-on weights for this model are based on the 140" wheelbase.

** Weight includes standard chassis, standard tires, oil and water, but less fuel.

[2] Frame Height at centerline of front axle: unloaded - 37.5", loaded - 35.3"

[3] Frame Height at centerline of rear axle: unloaded - 40.5", loaded - 36.3"

NOTE: Due to internal spring friction and manufacturing tolerances, these values may vary up to 0.5 inches. To achieve these nominal values directly after loading or unloading a vehicle, it may be necessary to drive the vehicle for a short period.

**INTERNATIONAL®****HV****SERIES MEDIUM DUTY****HV607 SBA****STANDARD EQUIPMENT****MODEL CODE: HV60700****01 FRAMES**

- 01ANA - AXLE CONFIGURATION {Navistar} 4x2
NOTE: Pricing may change if axle configuration is changed.
- 01CAD - FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield); 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm); 455.0" (11557mm) Maximum OAL
- 01LLA - BUMPER, FRONT Swept Back, Steel, Heavy Duty
- 01WGR - WHEELBASE RANGE 138" (350cm) Through and Including 187" (475cm)

02 AXLE, FRONT

- 02ARX - AXLE, FRONT NON-DRIVING {Meritor MFS-10-143A} Wide Track, I-Beam Type, 10,000-lb Capacity

03A SUSPENSION, FRONT

- 03ADB - SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 10,000-lb Capacity, with Shock Absorbers

04 BRAKES

- 04091 - BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
- * BRAKE LINES Color and Size Coded Nylon
 - * DRAIN VALVE Twist-Type
 - * GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster
 - * PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel
 - * PARKING BRAKE VALVE For Truck
 - * QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4
 - * SPRING BRAKE MODULATOR VALVE {Bendix} R-7 for 4x2, SR-7 with relay valve for 6x4/8x6
- 04AZA - AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System
- 04XCJ - BRAKES, FRONT {Bendix Spicer ADB22X} Air Disc Type, Extended Service, Size 22.5", 23,000-lb Capacity
- 04XDW - BRAKE CHAMBERS, FRONT AXLE 18 SqIn, for Air Disc Brakes

04 BRAKES

- 04XCK - BRAKES, REAR {Bendix Spicer ADB22X} Air Disc Type, Extended Service, Size 22.5", 26,000-lb Capacity per Axle
- 04XEA - BRAKE CHAMBERS, REAR AXLE 18/24 SqIn Spring Brake, Double Diaphragm, for Air Disc Brakes
- 04SPA - AIR COMPRESSOR {Cummins} 18.7 CFM
- 04VKH - AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Under Cab
- 04732 - DRAIN VALVE {Berg} with Pull Chain, for Air Tank

05 STEERING

- 05PSA - STEERING GEAR {Sheppard M100} Power
- 05AAA - STEERING COLUMN Stationary
- 05CAW - STEERING WHEEL 4-Spoke; 18" Dia., Black

06 DRIVELINES

- * END YOKES Half-Round, Easy Service (All)
- 06DGA - DRIVELINE SYSTEM {Dana Spicer} SPL100, for 4x2/6x2

07 EXHAUST SYSTEM

- 07BME - EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Under Right Rail Back of Cab, Includes Single Short Horizontal Tail Pipe

08 ELECTRICAL

- 08000 - ELECTRICAL SYSTEM 12-Volt, Standard Equipment
- * DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
 - * HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
 - * HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
 - * PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
 - * STARTER SWITCH Electric, Key Operated
 - * STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
 - * TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
 - * WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever

(CONT.)

08 ELECTRICAL

(CONT.)

- * WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
 - * WIRING, CHASSIS Color Coded and Continuously Numbered
- 08GXD - ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense
- 08TTR - BATTERY BOX Steel, with Plastic Cover, 30" Wide, 2-4 Battery Capacity, Mounted Right Side Under Cab
- 08MJP - BATTERY SYSTEM {Fleetrite} Maintenance-Free, (2) 12-Volt 1320CCA Total, Top Threaded Stud
- 08XAI - CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
- 08WPH - CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
- 08VAY - HORN, ELECTRIC Disc Style
- 08WWJ - INDICATOR, LOW COOLANT LEVEL with Audible Alarm
- 08RMX - RADIO Omit, Includes Wiring and Antenna
- 08RMS - SPEAKERS Omit
- 08XKL - STARTING MOTOR {Mitsubishi Electric Automotive America 90P47} 12-Volt, with Soft-Start
- 08XGT - TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
- 09 FRONT END**
- 09WBC - FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV
- 09IIBM - GRILLE Stationary, Chrome
- 09AAB - LOGOS EXTERIOR Model Badges
- 09AAE - LOGOS EXTERIOR, ENGINE Badges
- 10 PAINT & MISCELLANEOUS**
- 10060 - PAINT SCHEMATIC, PT-1 Single Color, Design 100
- * PAINT SCHEMATIC ID LETTERS "WL"
- 10761 - PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
- 11 CLUTCH**
- 11001 - CLUTCH Omit Item (Clutch & Control)

Refer To General Info for Metric Conversion Tables

**INTERNATIONAL®****HV****SERIES MEDIUM DUTY****HV607 SBA****STANDARD EQUIPMENT****MODEL CODE: HV60700****12 ENGINE**

12ERC - ENGINE, DIESEL {Cummins B6.7 200} EPA 2021, 200HP @ 2400 RPM, 520 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 200 Peak HP (Max)

12UWY - RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler

- * DEAERATION SYSTEM with Surge Tank
- * HOSE CLAMPS, RADIATOR HOSES {Gates} Shrink Band Type; Thermoplastic Coolant Hose Clamps
- * RADIATOR HOSES Premium, Rubber

12THT - FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed

- * FAN Nylon

12VBC - AIR CLEANER Single Element

12703 - ANTI-FREEZE Red, Extended Life Coolant; to -40 Degrees F/ -40 Degrees C, Freeze Protection

12VXT - THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

13 TRANSMISSION

13ASL - TRANSMISSION, AUTOMATIC {Allison 2500 HS} 5th Generation Controls, Wide Ratio, 5-Speed with Overdrive, Less PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max

13WVV - NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

14A AXLE, REAR

14ANP - AXLE, REAR, SINGLE {Meritor MS-17-14X-3DFL} Single Reduction, 17,500-lb Capacity, 190 Wheel Ends

- * RATIO: 2.64, 3.08, 3.25, 3.36, 3.42, 3.55, 3.70, 3.90, 4.11, 4.33, 4.63, 4.88, 5.13, 5.29, 5.57, 5.86, 6.14, 6.43, 6.83 OR 7.17

14B SUSPENSION, REAR

14SAH - SUSPENSION, REAR, SINGLE 18,500-lb Capacity, Vari-Rate Springs

15 FUEL TANKS

15SWU - FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 40 US Gal (151L), Mounted Left Side, Under Cab

15WDG - DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab

15LNR - FUEL/WATER SEPARATOR {Racor 400 Series} with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine

16 CAB

16030 - CAB Conventional, Day Cab

16ZBT - ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab

16VKB - CAB INTERIOR TRIM Classic, for Day Cab

- * CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger

- * DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted

- * SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap

16WSK - CAB REAR SUSPENSION Air Bag Type

16GDC - GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 3 Inch Monochromatic Text Display

16BAL - HEATER

16XJN - INSTRUMENT PANEL Flat Panel

16HKT - IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

16SNL - MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width

- NOTE:** Mirror Dimensions are Rounded to the Nearest 0.5"

- For U.S. Only

16 CAB**(CONT.)**

16JXG - SEAT, FRONT BENCH

{National} Full Width; Vinyl, with Fixed Mid Back

16XCK - WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors

27/28 WHEELS & TIRES

27DTU - WHEELS, FRONT {Accuride 29001} DISC; 22.5x7.50 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

28DTU - WHEELS, REAR {Accuride 29001} DUAL DISC; 22.5x7.50 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

737213 5415 (02) 11R22.5 14-PR LR-G SINGLE FRONT RADIAL TIRES {Continental Tire HSR2}

737213 5415 (04) 11R22.5 14-PR LR-G DUAL REAR RADIAL TIRES {Continental Tire HSR2}

40 WARRANTY

40128 - WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A

Refer To General Info for Metric Conversion Tables

INTERNATIONAL® HV SERIES SECTION 195 - STANDARD EQUIPMENT

PLM-282 REVISION NO. 104

PAGE 195-3

SUBJECT TO CHANGE WITHOUT NOTICE

Printed in the United States of America

All Taxes Extra, when Applicable

01/04/2021

<u>Code</u>	<u>Description</u>
HV60700	Base Chassis, Model HV607 SBA with 175.00 Wheelbase, 107.90 CA, and 75.00 Axle to Frame.
1ANA	AXLE CONFIGURATION {Navistar} 4x2
1CAD	FRAME RAILS High Strength Low Alloy Steel (80,000 PSI Yield), 10.250" x 3.092" x 0.375" (260.4mm x 78.5mm x 9.5mm); 455.0" (11557mm) Maximum OAL
1LLA	BUMPER, FRONT Swept Back, Steel, Heavy Duty
1WGR	WHEELBASE RANGE 138" (350cm) Through and Including 187" (475cm)
2ARX	AXLE, FRONT NON-DRIVING {Meritor MFS-10-143A} Wide Track, I-Beam Type, 10,000-lb Capacity
3ADB	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 10,000-lb Capacity, with Shock Absorbers
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
4732	DRAIN VALVE {Berg} with Pull Chain, for Air Tank
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM
4VKH	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Under Cab
4WJJ	DUST SHIELDS, FRONT BRAKE Rotor, with Air Disc Brakes
4WJL	DUST SHIELDS, REAR BRAKE Rotor, with Air Disc Brakes
4XCJ	BRAKES, FRONT {Bendix Spicer ADB22X} Air Disc Type, Extended Service, Size 22.5", 23,000-lb Capacity
4XCK	BRAKES, REAR {Bendix Spicer ADB22X} Air Disc Type, Extended Service, Size 22.5", 26,000-lb Capacity per Axle
4XDW	BRAKE CHAMBERS, FRONT AXLE 18 SqIn, for Air Disc Brakes
4XEA	BRAKE CHAMBERS, REAR AXLE 18/24 SqIn Spring Brake, Double Diaphragm, for Air Disc Brakes
5AAA	STEERING COLUMN Stationary
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PSA	STEERING GEAR {Sheppard M100} Power
6DGG	DRIVELINE SYSTEM {Dana Spicer} 1710, for 4x2/6x2
7BME	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Under Right Rail Back of Cab, Includes Single Short Horizontal Tail Pipe
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
8GXD	ALTERNATOR {Leece-Neville AV160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense
8MJP	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (2) 12-Volt 1320CCA Total, Top Threaded Stud
8RMS	SPEAKERS Omit
8RMX	RADIO Omit, Includes Wiring and Antenna
8RPP	ANTENNA Shark Fin, Roof Mounted
8TTR	BATTERY BOX Steel, with Plastic Cover, 30" Wide, 2-4 Battery Capacity, Mounted Right Side Under Cab
8VAY	HORN, ELECTRIC Disc Style
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade

<u>Code</u>	<u>Description</u>
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XKL	STARTING MOTOR {Mitsubishi Electric Automotive America 90P47} 12-Volt, with Soft-Start
8XNY	HEADLIGHTS Halogen
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HBM	GRILLE Stationary, Chrome
9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12EMZ	VENDOR WARRANTY, ENGINE {Cummins} B6.7 Engine, 3-Year Unlimited Miles Standard Warranty
12ERC	ENGINE, DIESEL {Cummins B6.7 200} EPA 2021, 200HP @ 2400 RPM, 520 lb-ft Torque @ 1600 RPM, 2600 RPM Governed Speed, 200 Peak HP (Max)
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed
12UWZ	RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 SqIn, with 1167 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler
12VBC	AIR CLEANER Single Element
12VHP	EMISSION, CALENDAR YEAR {Cummins B6.7} EPA, OBD and GHG Certified for Calendar Year 2021
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYP	ENGINE CONTROL, REMOTE MOUNTED No Provision for Remote Mounted Engine Control
12WZE	CARB IDLE COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations
12XCS	CARB EMISSION WARR COMPLIANCE Federal, Does Not Comply with CARB Emission Warranty
13ASL	TRANSMISSION, AUTOMATIC {Allison 2500 HS} 5th Generation Controls, Wide Ratio, 5-Speed with Overdrive, Less PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max
13WLN	TRANSMISSION OIL Synthetic; 20 thru 28 Pints
13WVS	TRANSMISSION SHIFT CONTROL T-Handle
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released
13WYY	SHIFT CONTROL PARAMETERS {Allison} 1000 or 2000 Series Transmissions, Performance Programming
14ANV	AXLE, REAR, SINGLE {Meritor MS-21-14X-4DFR} Single Reduction, 21,000-lb Capacity, R Wheel Ends . Gear Ratio: 5.57
14SAH	SUSPENSION, REAR, SINGLE 18,500-lb Capacity, Vari-Rate Springs

Code	Description
15LMS	FUEL/WATER SEPARATOR 12 VDC Electric Heater, Includes Pre-Heater, Includes Water-in-Fuel Sensor, Cummins Supplied on Engine
15SWU	FUEL TANK Top Draw, Non-Polished Aluminum, D-Style, 16" Tank Depth, 40 US Gal (151L), Mounted Left Side, Under Cab
15WDG	DEF TANK 7 US Gal (26L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
16400	SEAT, PASSENGER Omit Item
16BAL	HEATER
16GED	GAUGE CLUSTER Base Level; English with English Electronic Speedometer
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16JXG	SEAT, FRONT BENCH {National} Full Width; Vinyl, with Fixed Mid Back
16SNL	MIRRORS (2) C-Loop, Black Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width
16VKB	CAB INTERIOR TRIM Classic, for Day Cab
16WSK	CAB REAR SUSPENSION Air Bag Type
16XCK	WINDOW, MANUAL (2) and Manual Door Locks, Left and Right Doors
16XJN	INSTRUMENT PANEL Flat Panel
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab
27DTU	WHEELS, FRONT {Accuride 29001} DISC; 22.5x7.50 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DTU	WHEELS, REAR {Accuride 29001} DUAL DISC; 22.5x7.50 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
7372138132	(2) TIRE, FRONT 11R22.5 Load Range G ENDURANCE RSA (GOODYEAR), 496 rev/mile, 75 MPH, All-Position
7372138132	(4) TIRE, REAR 11R22.5 Load Range G ENDURANCE RSA (GOODYEAR), 496 rev/mile, 75 MPH, All-Position

Services Section:

40128	WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A
	VA Sheriff's Bid Fee (.0075 x List Price + Freight) \$105,950.00 rounded up
	Commodity Surcharge

<u>Description</u>	(US DOLLAR)	<u>Price</u>
Total Factory List Price Including Options:		\$102,600.00
Total Goods Purchased:		\$1,545.00
Freight		
Total Freight:		\$2,600.00
Total Factory List Price Including Freight:		\$106,745.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

Norfolk Truck Center, Inc.
736 Tidewater Drive
Norfolk VA 23504 -
(757)622-3246

This proposal is not binding upon the seller without
Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.