


VSA FTR 2024 - Build





Weight Distribution

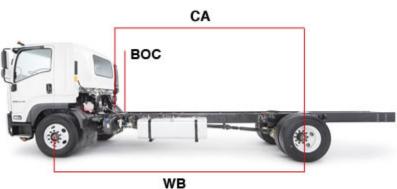

Front Wt.	6,925.37 lbs.	65%
Rear Wt.	3,668.13 lbs.	35%
GVWR	25,950.00 lbs.	
GVW	10,593.50 lbs.	
Remaining Payload Weight	15,356.50 lbs.	

Driver/Passenger Weight	350.0 lbs.
Wheelbase (WB)	152 inches
Cab-to-Axle (CA)	127 inches
Body Length	
Body Weight	
Back of Cab (BOC)	10.4 inches

** You must fill in body length and weight to enable body and payload weight calculations.

Weight (lbs.)	Front	Rear	Total
Chassis	6,448.00	3,440.00	9,888.00
Chassis Equipment	127.37	228.13	355.50
Subtotal	6,575.37	3,668.13	10,243.50
Driver/Passengers	350.00	0.00	350.00
Body/Body Equipment	0.00	0.00	0.00
Payload	0.00	0.00	0.00
Total	6,925.37	3,668.13	10,593.50
GAWR/GVWR	12,000.00	19,000.00	25,950.00
GCWR			30,000.00

Chassis Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
G1	White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank		0.00 lbs.	0.00 lbs.	0.00 lbs.
34L	21,000 lbs. capacity		0.00 lbs.	0.00 lbs.	0.00 lbs.
SAS	Multi leaf, bolted		0.00 lbs.	0.00 lbs.	0.00 lbs.
THF	50 Gallon Fuel Tank Capacity	97.54 inches behind the front axle	127.37 lbs.	228.13 lbs.	355.50 lbs.
5S8	11R22.5 G		0.00 lbs.	0.00 lbs.	0.00 lbs.
011	5.571:1		0.00 lbs.	0.00 lbs.	0.00 lbs.

Driver/Passengers:

	Center of Gravity	Front Axle	Rear Axle	Total
Driver	front axle	350.00 lbs.	0.00 lbs.	350.0 lbs.



	Code	Description	Weight	MSRP
Model				
	MT1	FTR 152"WB, 127"CA		\$95,812.00
	G1	White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank		\$0.00
Vehicle .	Application	on		
	RQ2	Truck Application	0.0 lbs.	Inc
Emissio	ns			
	NG5	50 State Emission	0.0 lbs.	Inc
Tires				
	I5H	LRR (low rolling resistance)	0.0 lbs.	Inc
	5S8	11R22.5 G	0.0 lbs.	Inc.
Engine				
-	IE8	Cummins B6.7, diesel engine, 408 CID (6.7L), 260 HP at 2400 RPM, 660 lbft. gross torque at 1600 RPM, 6-cylinder, turbocharged, inter-cooled, EGR cooler, high pressure common rail fuel system, and single module aftertreatment.	0.0 lbs.	Inc.
Transmi	ssion			
	Y6E	Allison RDS 2550 / 6 speed trans w/ PTO gear	0.0 lbs.	Inc
Wheelba	ase			
	39W	152" Wheelbase 127"CA	0.0 lbs.	Inc
Air Clea	ner			
	E6U	Dry paper single element. (Donaldson)	0.0 lbs.	Inc
Alternat	or			
	KW1	160 AMP. with integral regulator.	0.0 lbs.	Inc
Battery				
Exhaust	IX1	Dual 12-Volt maintenance free group 31 750 CCA batteries with threaded posts	0.0 lbs.	Inc
EXIIausi	I0B	Single module Cumming aftertreatment w/ DDE 9	0.0 lbs	lna
	IUB	Single module Cummins aftertreatment w/ DPF & SCR, exhaust cooler, and electronic exhuast restriction.	0.0 lbs.	Inc
Front Ax	cle			
	40C	Dana E1254-W 12,000 lbs. capacity	0.0 lbs.	Inc
Rear Su	spension			
	34L	21,000 lbs. capacity	0.0 lbs.	Inc
	SAS	Multi leaf, bolted	0.0 lbs.	Inc
Rear Ax	le			
	M20	Dana S19-140 single-speed axle, 19,000 lbs. capacity with synthetic lubricant	0.0 lbs.	Inc
Ratio				
	011	5.571:1	0.0 lbs.	Inc
Fuel Tar	ık			
	70A	Left hand rail	0.0 lbs.	Inc

Current report content is based on data as of 2023-04-17 06:56:32. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.

Initial:



Code	Description	Weight	MSRP
THF	50 Gallon Fuel Tank Capacity	355.5 lbs.	Inc.
Seat			
A56	Level air suspension seat with RH armrest driver seat	0.0 lbs.	Inc.
Brakes			
Z06	Full air dual circuit, s-cam, drum	0.0 lbs.	Inc.
Air Conditioning			
C60	Air conditioner	0.0 lbs.	Inc
Power Windows	& Door Locks		
ILO	Yes	0.0 lbs.	Inc.
Floor Mats			
IQ6	Standard Floor Mats	0.0 lbs.	Inc.
Model Option			
G1	White, standard model specifications with power windows, power door locks, air conditioning, 5.57 final ratio, 11R22.5G tires, 21,000 multi leaf suspension, steel wheel type, and 50 gallon aluminum fuel tank	0.0 lbs.	Inc.
CAB			
729	Arc white color	0.0 lbs.	Inc.
Mirrors			
DJ6	Black mirror head with black stays	0.0 lbs.	Inc
Frame			
7KJ	Straight frame, 80,000 PSI, 33.5 wide	0.0 lbs.	Inc
Front Springs			
34K	12,000 lbs. capacity	0.0 lbs.	Inc
Accessories			
8RP	Radio AM/FM/CD with Bluetooth	0.0 lbs.	Inc
IX2	Rear body dome lamp switch	0.1 lbs.	Inc
Air Compressor			
104	17 CFM turbocharged heavy duty.	0.0 lbs.	Inc
Totals	· · ·		
	Base Price Destination Charge Material & Transportation Surcharge DEF Fill Charge Total Options Price		\$95,812.00 \$2,950.00 \$3,875.00 \$10.00
	Tire Weight Tax		\$151.68
	Total		\$102,798.6



Quote Worksheet		
		MSRP
Base Price		\$95,812.00
Destination Charge		\$2,950.00
Material & Transportation Surcharge		\$3,875.00
DEF Fill Charge		\$10.00
Total Options		\$0.00
Subtotal		\$102,647.00
Subtotal Additional Equipment		\$0.00
Subtotal Miscellaneous Equipment		\$0.00
Pre-Tax Subtotal		\$102,647.00
Less Customer Discount		(\$-15,453.00)
Subtotal Discount		(\$-15,453.00)
Taxable Price		\$87,194.00
Sales Tax	0%	\$0.00
Tire Weight Tax		\$151.68
Subtotal Taxes		\$151.68
Subtotal Post-Tax Adjustments		\$0.00
Less Post-tax Customer Discount		\$0.00
Subtotal Discount		\$0.00
Total Sales Price		\$87,345.68

Dealer Signature/Date	Customer Signature/Date