

Specifications:

Body lengths from 14' to 20' in 6" increments
Side Heights 42", 48", 54" and 60"

FLOOR:

3/16" AR 450 one-piece floor with 12" radius to sides.

SIDES:

One piece 10 gauge 50K minimum yield with fully boxed top rails, material shedding lower rails, full depth rear posts, ladders and grab handles both side and front, continuous weld.

UNDERSTRUCTURE:

Crossmemberless design with 3/16" formed trapezoid longitudinal members with rubber cushion in formed track.

FRONT WALL:

10 gauge 50K minimum yield steel with horizontal formed inverted "V" reinforcements.

TAILGATE:

Three panel 10 gauge 50K minimum yield steel with full perimeter bracing and two intermediate horizontal braces continuous weld.

TAILGATE HARDWARE:


Heavy duty cast steel upward acting top hardware with air operated adjustable cast steel overshot lower hardware and spreader chains. Banjo eyes near bottom of gate control opening you select.

LIGHTING:

FMVSS 108 required lights and reflectors. L.E.D. lights are recessed and rubber grommet mounted.

OPTIONS:

- 1/4" AR 450 floor in lieu of 3/16"
- 1/4" AR 450 sides
- 3/16" 50K minimum yield steel sides, front and gate
- 3/16" AR 450 sides and gate
- Air high lift or two-way barn door tailgate

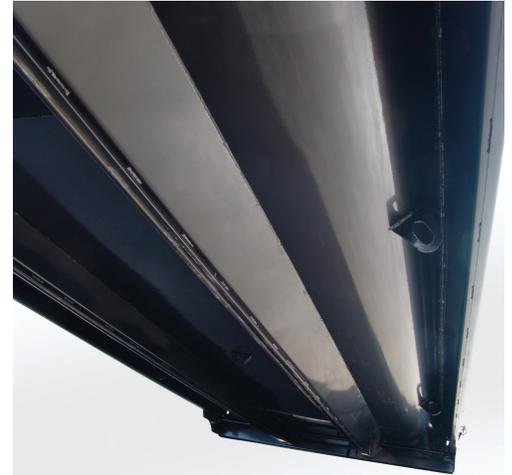

Above is the 600U/T's crossmemberless understructure and formed long sills with rubber cushion.



Tailgate hardware is offset cast steel with zerk grease fittings.



Shown is the inside of the 600U/T body and 12" floor to side radius.