

PAS 200 HF T4F

Diesel - Qmax 850 m³/h (3,740 USgpm) - Hmax 50 m (164 ft)

Authorized Distributor:
Holland Pump Company
7312 Westport Place, WPB, FL 33413
(561)697-3333
sales@hollandpump.com



PAS HF - Vacuum prime centrifugal pumps

The pump system consists of a centrifugal pump and a separator, which enables air to be separated from the liquid and be sucked by a vacuum pump - making automatic priming possible. Even with suction heights of several meters the machine rapidly evacuates the air from the suction pipe and starts to pump. Additionally, thanks to the semi-open impeller, the PAS HF range is also suitable for pumping liquids with solids in suspension.

Applications

Both Atlas Copco and Varisco have decades of experience in designing and producing pumps. We have put those years of expertise into providing a solutions portfolio that works across multiple applications. The PAS HF (high flow) range is packed with features that not only meet, but exceed the needs of the market. We are focused on an efficient, extremely versatile pump that is suitable for many industries, including construction, general dewatering and emergency applications, such as flood clean up.

Benefits

Pump

High efficiency: 75% (B.E.P)

Rapid "dry" priming

Up to a height of 7,5 m (24.6 ft)

High resistance

To abrasive liquids and turbid sandy waters

Semi-open impeller

Solids handling up to 76 mm (3")

Diaphragm vacuum pump

Oil free suitable for dry running: no contamination of the environment

Mechanical shaft seal in oil bath

It allows the "dry running" operation of the pump

Wear plate

Cast iron wear plate that is easily replaceable

Easy maintenance

Without lifting devices: hinged cover for direct access to the impeller

PAS 200 HF T4F

Performance curves

Authorized Distributor:
Holland Pump Company
7312 Westport Place, WPB, FL 33413
(561)697-3333
sales@hollandpump.com


Test according to UNI EN ISO 9906 standard - level 2

Test liquid: clean water, density 1,000 kg/m³

Spherical solids handling: D.76 mm (3")

Priming time: 30 s from 1,5 m (4.9 ft)

Max absorbed power: 78,0 kW - 104.6 HP (2.200 rpm)

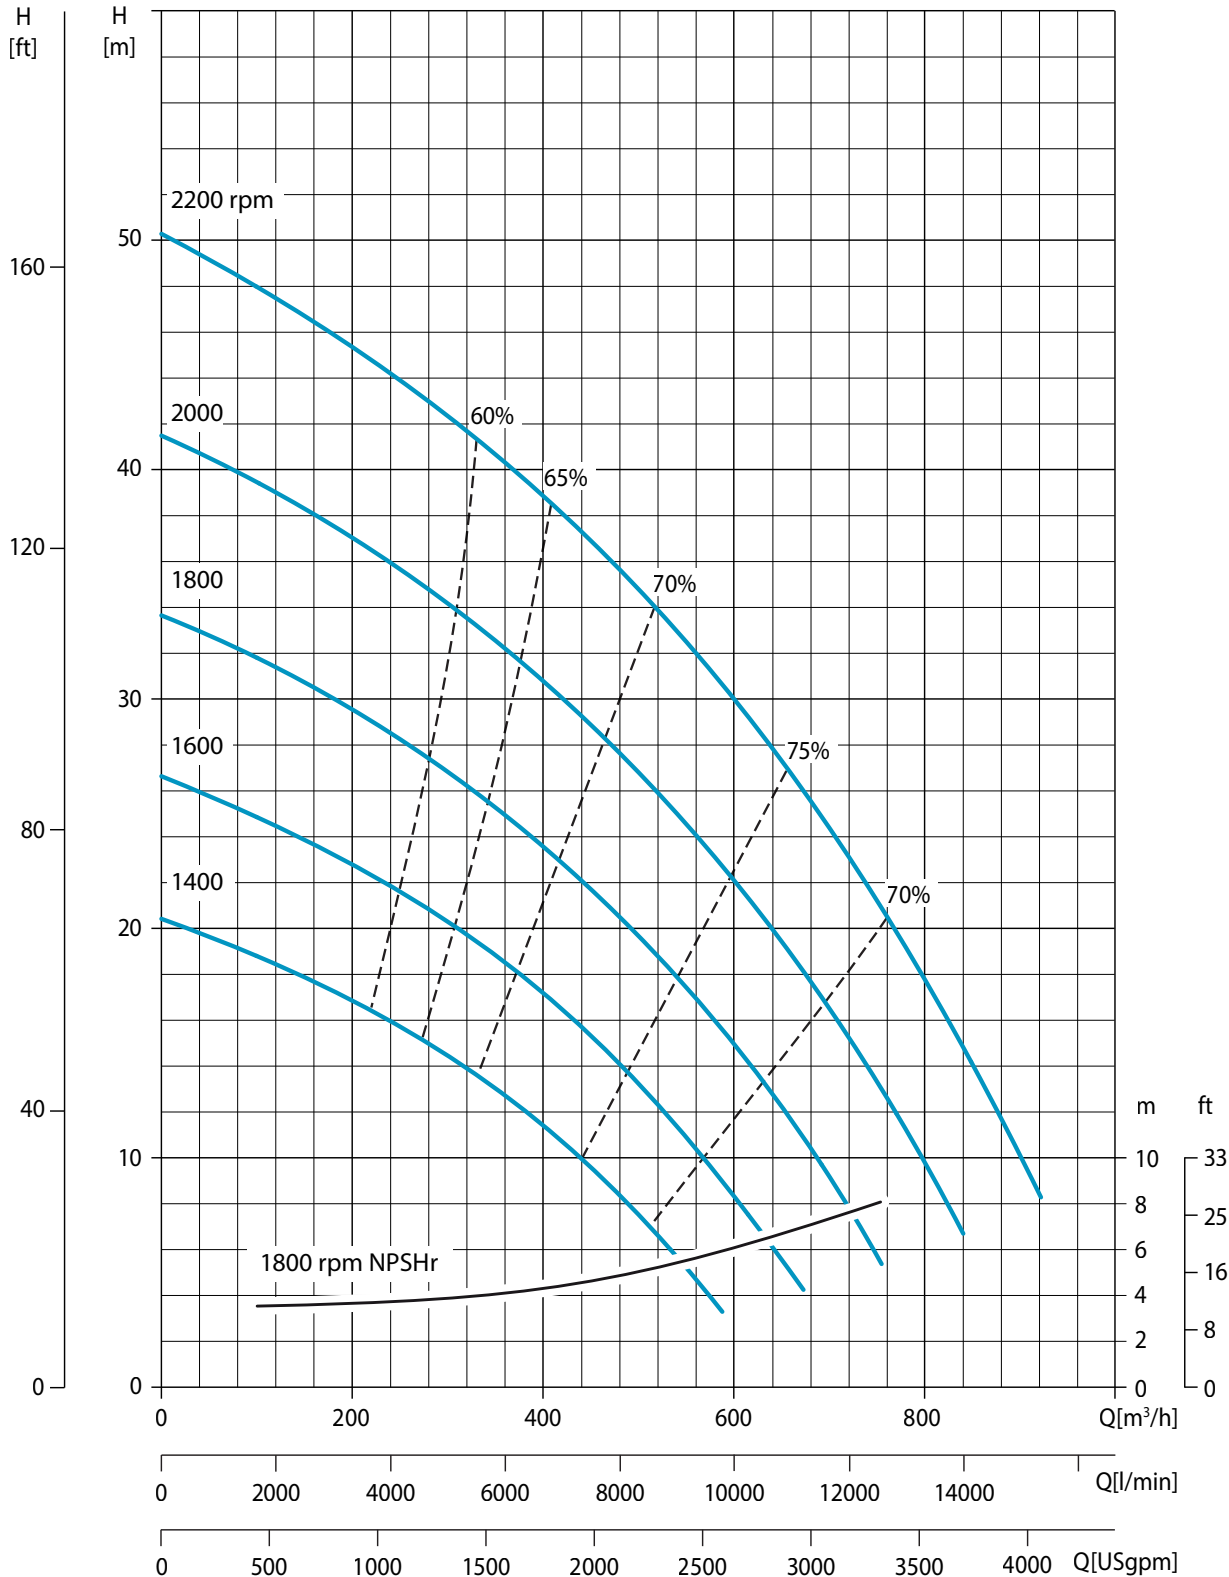

PAS 200 HF T4F

Technical data

Authorized Distributor:
Holland Pump Company
7312 Westport Place, WPB, FL 33413
(561)697-3333
sales@hollandpump.com

Pump

Model	PAS 200 HFST4F
Q _{max}	850 m ³ /h - 14.170 l/min (3,740 USgpm)
H _{max}	50 m (164 ft)
Q max eff.	660 m ³ /h - 11.000 l/min (2,900 USgpm)
Eff. max	75 %
Suction port	Flanged - ANSI 200
Delivery port	Flanged - ANSI 200
Impeller type	Semi-Open, 2 vane
Solids handling	76 mm (3.0 ")
Material	G11
Casing	EN-GJL-200 cast iron
Impeller	EN-GJS-500 cast iron
Wear plates	EN-GJL-200 cast iron
Number of plates	1
Shaft	39NiCrMo4 steel
Flushing	Yes
Mechanical seal	Tungsten carbide /Tungsten carbide
Elastomers	VITON
Lubrication	Oil

Priming system

Vacuum pump	V20
Vacuum pump type	Diaphragm
Nominal air capacity	50 m ³ /h (29.4 cfm)
Max vacuum	0,9 bar
Separator type	-
Separator material	EN-GJL-200 cast iron
Drives	Link belt

Engine

Make	Perkins			
Model	904J-E36TA			
Type	Direct Injection Diesel			
Displacement	3.621 cm³ (151 in³)			
No. cylinders	4			
Cooling	Liquid with radiator			
Rpm type	Variable			
Standard speed	2.200 rpm			
US emissions	EPA Tier 4F			
Starting	Electric			
Starting voltage	24 V			
Emissions reduction technology	DOC + SCR			
Speed [rpm]	1600	1800	2000	2200
Power [kW]*	69,5	72,6	74,4	74,4
Power [HP]	93.2	97.4	99.7	99.7

* continuous power ISO 3046 ICXN

Control panel

Model	PW 750
	Manual operation
	Automatic operation: start-stop with transducers or floats
	Digital display with 6 languages (EN, SV, FR, DE, ES, IT) with:
	Hour meter, Rev counter, Liquid temperature, Oil pressure and temperature
	Battery voltmeter, Fuel level (%) and consumption (l/h)
	Automatic engine shutdown in case of:
	- low oil pressure
	- engine overheating
	- low battery voltage
	(engine failure alarms with LED lights and display message)
	Emergency stop button
	Vacuum gauge
	Push-button accelerator (up/down)

PAS 200 HF T4F

Arrangement

Authorized Distributor:
Holland Pump Company
7312 Westport Place, WPB, FL 33413
(561)697-3333
sales@hollandpump.com

Technical data

Material	ASTM A36 steel
Coatings	Polyester powder paint, average thickness of 3 MIL
Features	Lifting beam
Battery	Acid charge Pb-Ca maintenance free, 12 V - 185 Ah - 1300 A
Tank	81 USG
Locking keys	Fuel cap
Fuel consumption	- US Gal/hr @2200 rpm @BEP
H suction port	32 in (2.7ft)
Dry weight	5100 lbs