

PAS 150 HFS T4F

Diesel - Qmax 510 m³/h (2,250 USgpm) - Hmax 51 m (167 ft)

Authorized Distributor:
Holland Pump Company
7312 Westport Place, WPB, FL 33413
(561)697-3333
sales@hollandpump.com



Indicative picture of the product

PAS HF - Vacuum prime centrifugal pumps

The pump system consists of a centrifugal pump and a separator, which enables air to be separated from the liquid and be sucked by a vacuum pump - making automatic priming possible. Even with suction heights of several meters the machine rapidly evacuates the air from the suction pipe and starts to pump. Additionally, thanks to the semi-open impeller, the PAS HF range is also suitable for pumping liquids with solids in suspension.

Applications

Both Atlas Copco and Varisco have decades of experience in designing and producing pumps. We have put those years of expertise into providing a solutions portfolio that works across multiple applications. The PAS HF (high flow) range is packed with features that not only meet, but exceed the needs of the market. We are focused on an efficient, extremely versatile pump that is suitable for many industries, including construction, general dewatering and emergency applications, such as flood clean up.

Benefits

Pump

High efficiency: 70% (B.E.P)

Rapid "dry" priming

Up to a height of 7,5 m (24.6 ft)

High resistance

To abrasive liquids and turbid sandy waters

Semi-open impeller

Solids handling up to 76 mm (3")

Diaphragm vacuum pump

Oil free suitable for dry running: no contamination of the environment

Mechanical shaft seal in oil bath

It allows the "dry running" operation of the pump

Wear plate

Cast iron wear plate that is easily replaceable

Easy maintenance

Hinged cover for direct access to the impeller (without lifting devices). Link belt quick to replace on the field.

PAS 150 HFS T4F

Performance curves

Authorized Distributor:
Holland Pump Company
7312 Westport Place, WPB, FL 33413
(561)697-3333
sales@hollandpump.com


Test according to UNI EN ISO 9906 standard - level 2

Test liquid: clean water, density $1,000 \text{ kg/m}^3$

Spherical solids handling: D.76 mm (3")

Priming time: 30 s from 1,5 m (4.9 ft)

Max absorbed power: 51,0 kW - 68.4 HP (2.200 rpm)

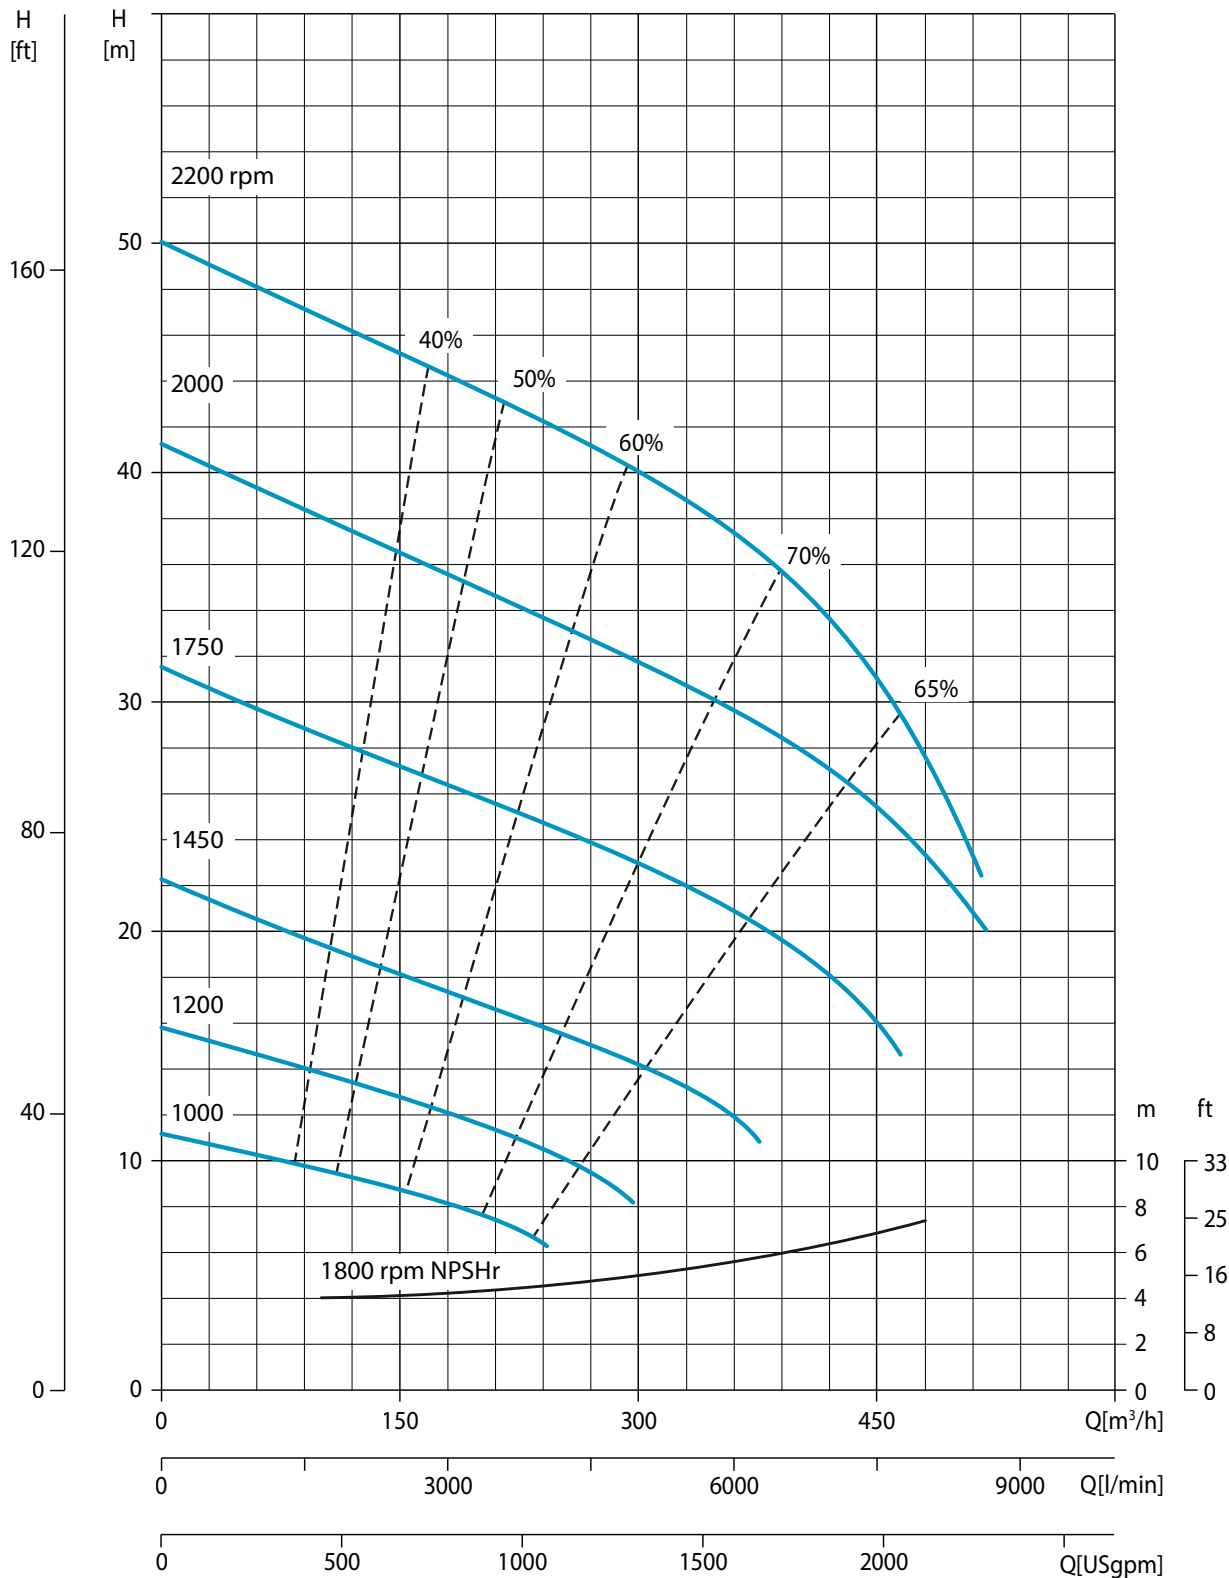

PAS 150 HFS T4F

Technical data

Authorized Distributor:
Holland Pump Company
7312 Westport Place, WPB, FL 33413
(561)697-3333
sales@hollandpump.com

Pump

Model	PAS 150 HFS T4F
Q _{max}	510 m ³ /h - 8.500 l/min (2,250 USgpm)
H _{max}	51 m (167 ft)
Q max eff.	390 m ³ /h - 6.500 l/min (1,700 USgpm)
Eff. max	70 %
Suction port	Flanged - ANSI 150
Delivery port	Flanged - ANSI 150
Impeller type	Semi-Open, 2 vane
Solids handling	76 mm (3.0 ")
Material	G11
Casing	EN-GJL-200 cast iron
Impeller	EN-GJS-500 ductile iron
Wear plates	EN-GJL-200 cast iron
Number of plates	1
Shaft	39NiCrMo4 steel
Flushing	Yes
Mechanical seal	Tungsten carbide / Tungsten carbide
Elastomers	VITON
Lubrication	Oil

Priming system

Vacuum pump	V20
Vacuum pump type	Diaphragm
Nominal air capacity	50 m ³ /h (29.4 cfm)
Max vacuum	0,9 bar
Separator type	-
Separator material	EN-GJL-200 cast iron
Drives	Link belt

Engine

Make	Kohler					
Model	KDI 2504TCR					
Type	Diesel turbo common rail					
Displacement	2.482 cm ³ (151 in ³)					
No. cylinders	4					
Cooling	Liquid with radiator					
Rpm type	Variable					
Standard speed	2.200 rpm					
US emissions	EPA Tier 4F					
Starting	Electric					
Starting voltage	12 V					
Oil change interval	500 h					
Speed [rpm]	1200	1400	1600	1800	2000	2200
Power [kW]*	32	39,6	45	47,7	49,1	49,7
Power [HP]	42.9	53.1	60.4	64.0	65.9	66.7

* continuous power ISO 3046 ICXN

Control panel

Model	PW 750
	Manual operation
	Automatic operation: start-stop with transducers or floats
	Digital display with 6 languages (EN, SV, FR, DE, ES, IT) with:
	Hour meter, Rev counter, Liquid temperature, Oil pressure and temperature
	Battery voltmeter, Fuel level (%) and consumption (l/h)
	Automatic engine shutdown in case of:
	- low oil pressure
	- engine overheating
	- low battery voltage
	(engine failure alarms with LED lights and display message)
	Service time (hours)
	Emergency stop button
	Push-button accelerator (up/down)
	(PW1 FleetLink control as option)

PAS 150 HFS T4F

Arrangement

Authorized Distributor:
Holland Pump Company
7312 Westport Place, WPB, FL 33413
(561)697-3333
sales@hollandpump.com

Technical data

Material	ASTM A36 steel
Coatings	Epoxy powder, average thickness of 3 MIL
Features	Lifting beam. Lockable doors, soundproof canopy design with 77dB(A) @23ft
Battery	Acid charge Pb-Ca maintenance free, 12 V - 1100 CCA
Tank	54 USG
Locking keys	Fuel cap
Fuel consumption	3.5 US Gal/hr @2200 rpm @BEP
H suction port	31 inch (2.6 ft)
Dry weight	4600 lbs

Dimensional

