



# Name: 4" Compressor-Assisted Solids Handling Pump

## Model: 4JSC-LHP

With its heavy-duty cast-iron construction and fast priming capabilities, the Thompson 4JSC-LHP solidshandling end suction centrifugal pump leads the industry in construction, industrial and municipal applications. The Thompson 4JSC-LHP is designed for moderate flows up to 1,060 gpm and heads up to 86 feet making it perfect for sewage bypass pumping or general construction dewatering.





Consult factory for other versions & options including site trailers, sound attenuation, etc.

Pump End Materials	
<b>Pump Casing</b>	Heavy-duty class 30 cast-iron.
<b>Impeller</b>	Dynamically balanced, non-clogging, enclosed, 65-45-12 ductile iron with rear-equalizing vanes to reduce axial loading and prolong seal and bearing life; diameter 8.25" x 10°.
<b>Mechanical Seal</b>	Dry-running, grease or oil lubricated with Tungsten Carbide rotating and Silicon Carbide stationary seal faces. Single inside mounted, non- pusher type with self-adjusting elastomeric bellows. Other components are 304 stainless steel and Viton.
<b>Head</b>	Rugged, back pull out design, heavy-duty class 30 cast iron with tapered bore design.
<b>Bearings</b>	Heavy-duty grease lubricated to carry both axial and radial loads.
<b>Bearing Frame</b>	Heavy-duty class 30 cast iron.
<b>Shaft</b>	SAE 1144 fitted with a 416 stainless steel shaft sleeve.

Technical Specifications			
Suction Size	4 in (10.16 cm)	Approximate Dry Weight	2,650 lbs (1,202.02 kg)
Discharge Size	4 in (10.16 cm)	Best Efficiency	63%
Maximum Solids Handling	3 in (7.62 cm)	Maximum Operating Speed	2,200 rpm
Maximum Operating Temperature	200° F (93.33° C)	Maximum Operating Pressure	37.23 psi (256.69 kPa)

Fuel Tank Options*		Maximum Run Times: Yanmar	
Modular (M)	50 Gal	69 Hours	
Double-Wall (D)	34 Gal	47 Hours	
Modular Large Capacity (X)	150 Gal	207 Hours	
Double-Wall Large Capacity (Z)	75 Gal	103 Hours	

\*Contact factory for fuel tank sizes not listed above.

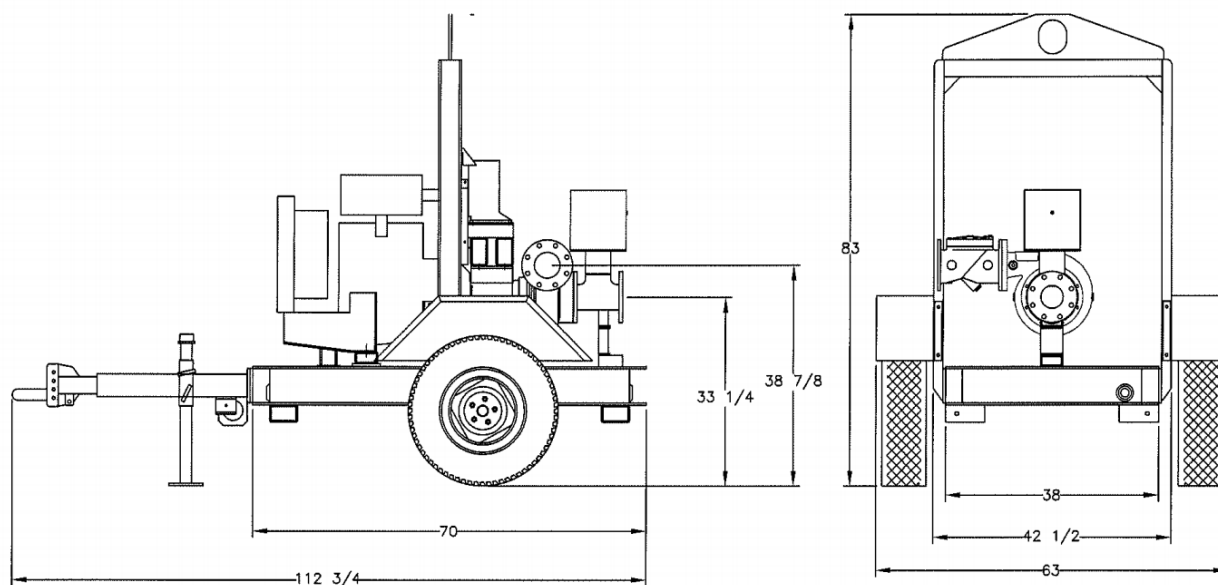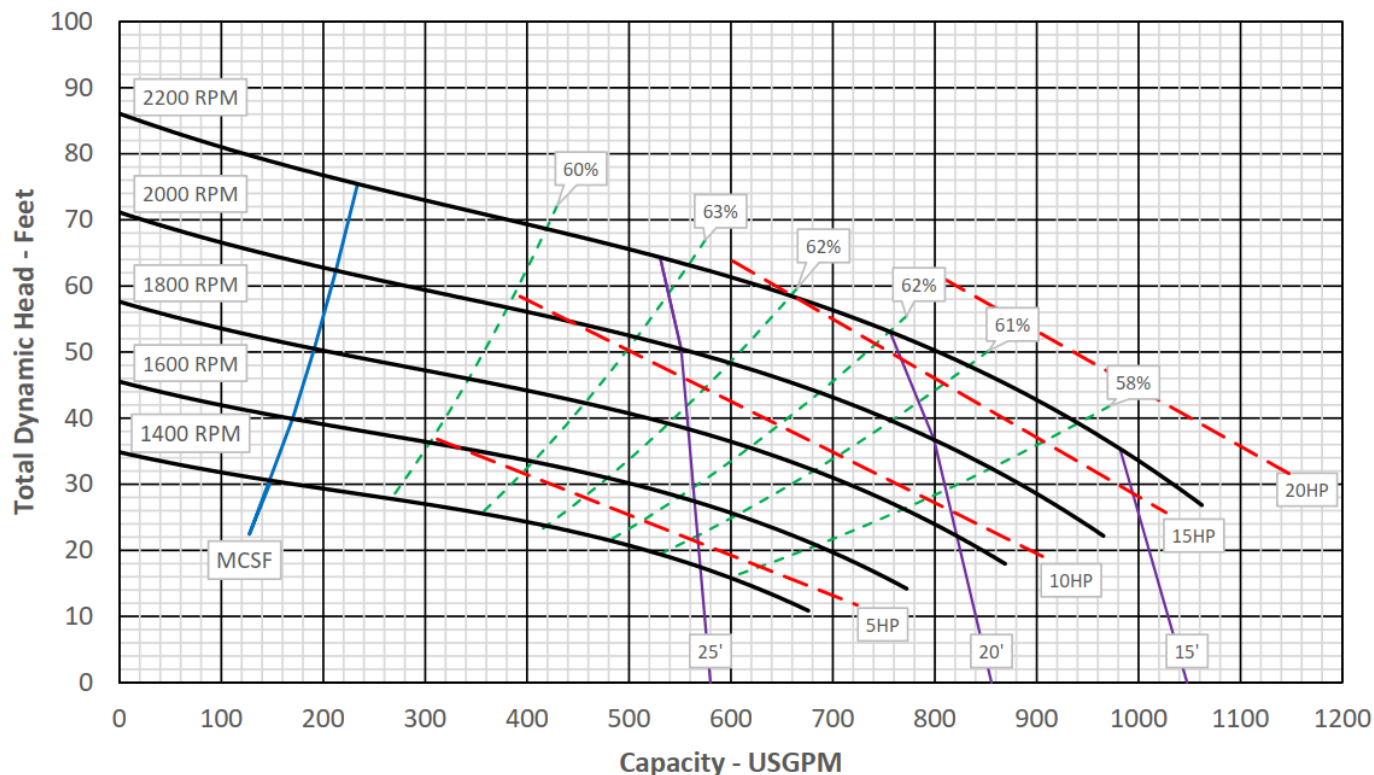

Yanmar 3TNV88F—24 hp @ 2,400 rpm				
Typical Operating Speed	2,200 rpm	Engine Speed	Fuel Economy	Run Time*
Maximum Head	86 ft (22.86 m)	2,200 rpm	0.378 lb/hp-hr	44 hrs
Maximum Flow Capacity	1,060 gpm (493.72 m <sup>3</sup> /hr)	2,000 rpm	0.369 lb/hp-hr	55 hrs
Maximum Fuel Consumption	1.13 gph (4.28 L/hr)	1,800 rpm	0.362 lb-hp-hr	69 hrs

\*Engine run times calculated based on a 50 gallon fuel tank.

Specifications and illustrations are subject to revision without notice and without incurring any obligation for previous or subsequent equipment sold. Thompson Pump (ISO 9001:2015) makes no representation regarding the completeness or accuracy of this information and is not liable for any direct or indirect damages arising from or relating to this information or its use. Capacity & Head are shown for comparative purposes. Consult Thompson factory for exact capabilities.