

WEDA S30 (60 Hz)


Product reference sheet

The WEDA sludge pumps can handle thick, soft, wet mud or other similarly viscous mixtures of liquids and solids, especially the product of an industrial or refining process. These pumps are particularly suitable for mining applications, trench and pond-cleaning, tank clean-out and for water containing mud, sludge or light slurry.


Product code	WEDA S30
Installation	Portable sludge pump
Hydraulic range	N - normal head
Insulation class	F (+155°C/+311°F) IEC 85
Protection class	IP68
Voltage variation	Max ± 5% of nominal voltage
Voltage imbalance	Max 2% - between phases
Max start stop	Max 30 starts/hour
Cable	H07RN-F (20 m) or SOOW AWG (65 ft)
Casted parts	Corrosion resistant aluminum
Impeller	High chrome iron, 55±5 HRC
Wear parts	Rubber (NBR)
Volute	Rubber (NBR) lining
Shaft	Stainless steel
O-rings	Rubber (NBR)
Bearings	Single row ball bearing in oil
Mechanical seal	Primary + secondary: SiC/SiC
Built-in controls and protection	1 ph: capacitor + contactor 3 ph: contactor + control relay
Thermal contacts	140°C / 284°F
Options / accessories	Float switch Zinc anodes Epoxy coating Couplings (hose / ISO-G / NPT) Terminal board NSSHÖU screened cable

Product code	WEDA S30
Solids handling	2 in
Liquid temperature	Max 104°F
Depth of immersion	Max 65 ft
Max liquid specific gravity	1.2
pH of the pumped liquid	pH 5–8


Weight and dimensions	N - Normal head
Discharge connection	3"
Height	24.4 in
Width	12.8 in
Diameter	9.8 in
Weight (excl. cable)	56 lb

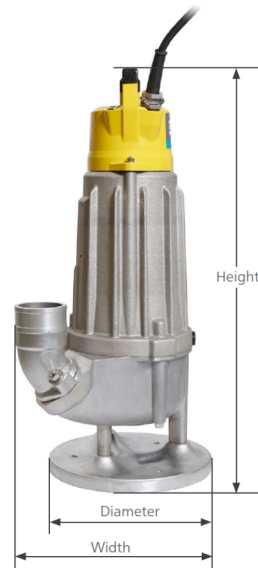

Performance curve

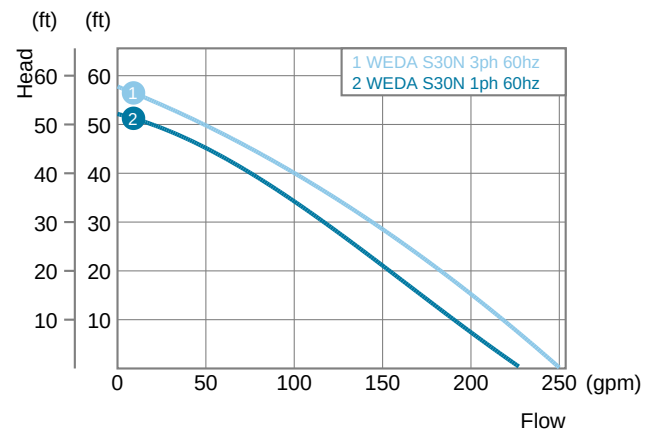

Power rating

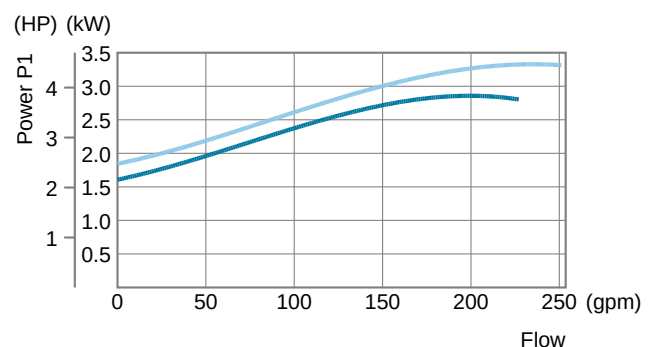


Rating	1 ph	3 ph	Std cable 1/3ph
Power P ₁	2.9 kW	3.9 kW	
Power P ₂	3 HP	4 HP	
Shaft speed	3500 r.p.m.	3500 r.p.m.	
230 V	13.0 A	11.3 A	AWG14/16
460 V	-	5.6 A	AWG14
575 V	-	4.5 A	AWG14
Other voltages on request			

WEDA S30


Performance sheet



Performance curve

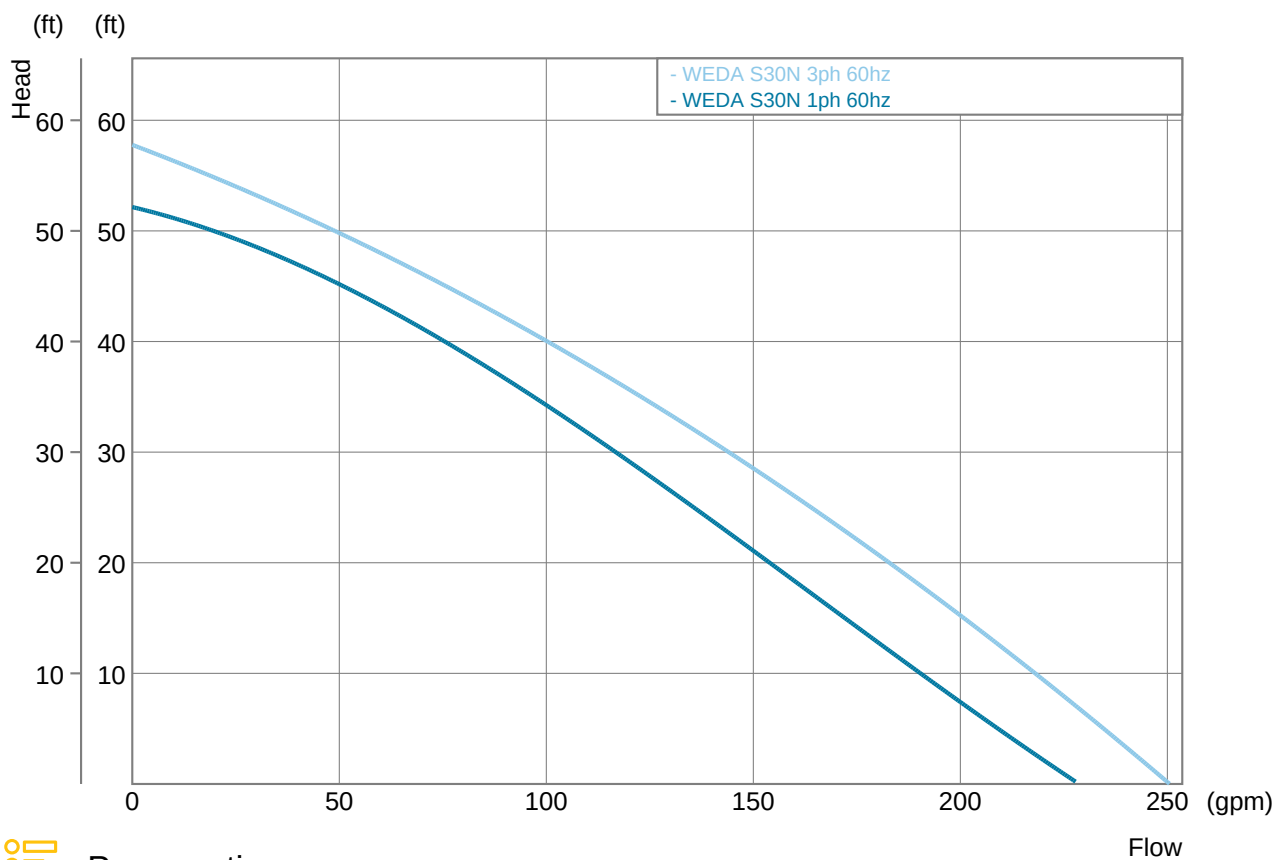

Power rating

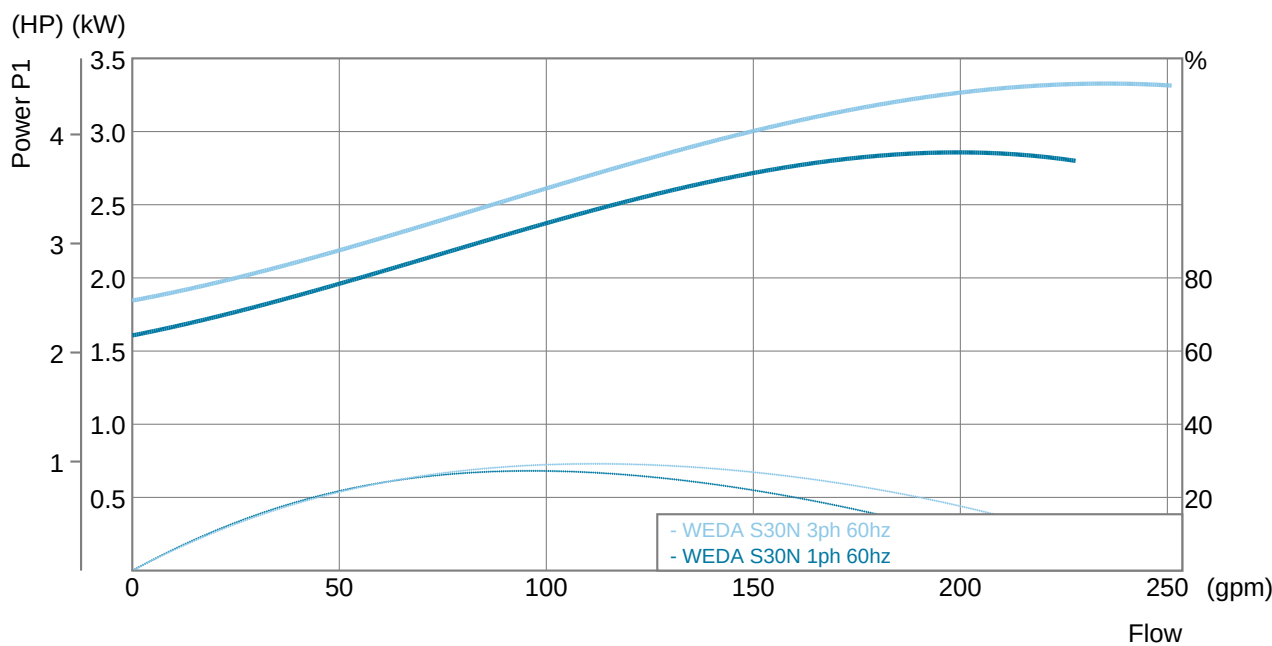

Atlas Copco
Power and Flow division
www.atlascopco.com/dewatering-pumps