

6" Hydraulically Driven Submersible System
Model H6MS-TD3.6L4
Size 6" Materials/ Sludge Pump

Holland Pump Company
Corporate Office: 7312 Westport Place
West Palm Beach, FL 33413
USA
1-800-451-0769
www.hollandpump.com

PUMP SPECIFICATIONS

Size: 6" Materials/ Sludge Pump

Volute: Fabricated Steel (optional stainless steel and special abrasion resistant steel volutes are available)

Impeller: Recessed vortex, 6 Vane. (optional stainless steel or special abrasion resistant steel impellers are available)

Solids: Handles 3" diameter compressible spherical solids.

Impeller Shaft: High strength steel

Seal: Rotary Mechanical, oil-lubricated, carbon & ceramic
(optional tungsten carbide or silicon carbide seals are available option)

Hydraulic System

Hydraulic Reservoir level: 50 gallon capacity with twin micron spin on oil filter

Hydraulic Oil: Petroleum based AW68 Furnished standard
(optional canola bio-degradeable oil or mineral based non-toxic inherently bio-degradeable oil available)


Hydraulic Pump: Denison vane type positive displacement pump with pilot operated Denison relief valve

Hydraulic Motor: Vickers vane type positive displacement motor

Heat Exchanger: Double row, SCH 40 pipe with integral intake basket
(optional engine mounted oil cooler available)

Hydraulic Hose: 50' set of SAE 100R2, two wire braid high-pressure hose

Pump Head Fail Safe Pressure Relief System: Available as option to protect system against improper connection or interruption of biodegradable oil flow from pump head to power unit

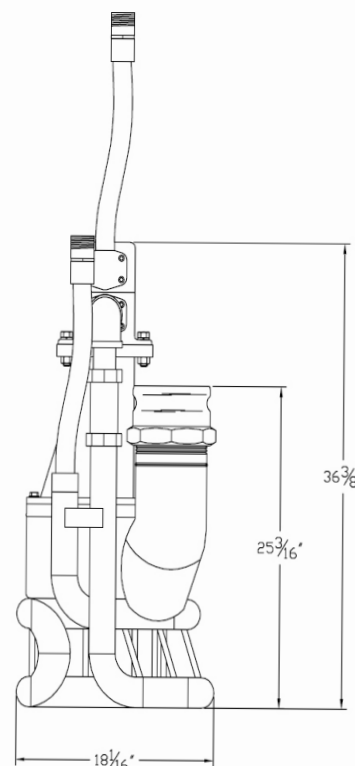

Holland 6" Materials/ Sludge Pump

ENGINE SPECIFICATIONS

Model: Deutz TD3.6L4, Tier 4 Final

Type: 4 Cylinder, 4 Stroke, Turbo Charged, Liquid Cooled Diesel Engine

Displacement: 3.6L (220cu.in.)

Governor: Electronic

Lubrication: Forced Circulation

Air Cleaner: Dry Type with Replaceable Element

Lube Oil Capacity: 2.9 U.S. Gallons (9L)

Coolant Capacity: 3.4 U.S. Gallons (13L)

Fuel Tank: Integral 114 U.S. Gallon Capacity (#2 Diesel Fuel)

Full Load Operating Time: 60 Hours Minimum @ 2000 PSI

Starter: 12 Volt, 2.0 kW

Standard Features: Cast Iron Engine Block, Flywheel and Flywheel Housing, Ecoplus Oil and Fuel Filters, Glow Plug Starting Aid, Integral Inlet and Manifold, Gear Driven Coolant Pump, Cast Iron Exhaust Manifold with Center Side Outlet, Standard Instrument Panel: Engine Temperature and Low Oil Pressure with optional Gauge, Key Start, and Hour Meter

Optional Features: Site or DOT Highway Trailer, Automatic Remote Start and Stop, HANS (Holland Automatic Notification System), NEMA 4 Instrument Package Covering: Air Filter, Fuel Filter, Engine Temperature, Fuel Level, Engine Oil Pressure, Hour Meter, Amp Meter, Hydraulic Oil Pressure

Deutz Published Performance: Maximum Continuous Power: 74 BHP (55.4kW) @ 2400 RPM



H6MS @ 2000 PSI	Capacity of Pump in U.S. Gallons per Minute (gpm) (Continuous Performance)
20' / 9.14m	1500/341
10' / 4.57m	1600/363

6" Hydraulically Driven Submersible System
Model H6MS-TD3.6L4
Size 6" Materials/ Sludge Pump

Holland Pump Company
Corporate Office: 7312 Westport Place
West Palm Beach, FL 33413
USA
1-800-451-0769
www.hollandpump.com

Approximate Dimensions
Powered by Deutz TD3.6L4 Diesel Engine, Optional
Single Axle Trailer Shown

	Skid Base	DOT Trailer	Pump
Net Weight (lbs)	2568	2968	195
Net Weight (kg)	1165	1346	88
Shipping Weight (lbs)	N/A	N/A	N/A
Export Crate Size (cu. ft)	198	N/A	16

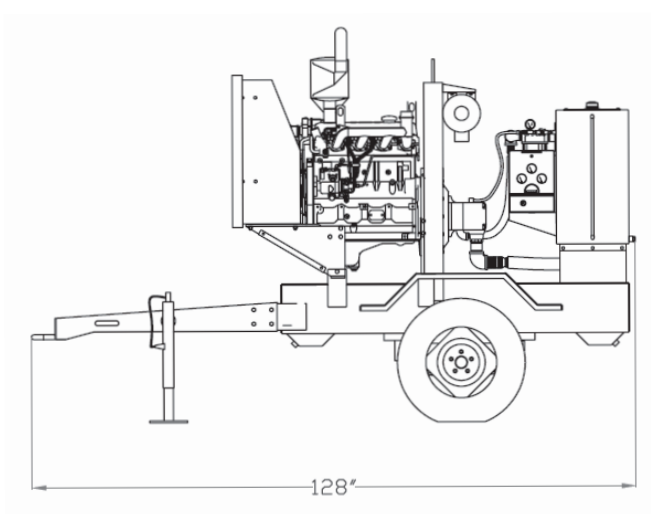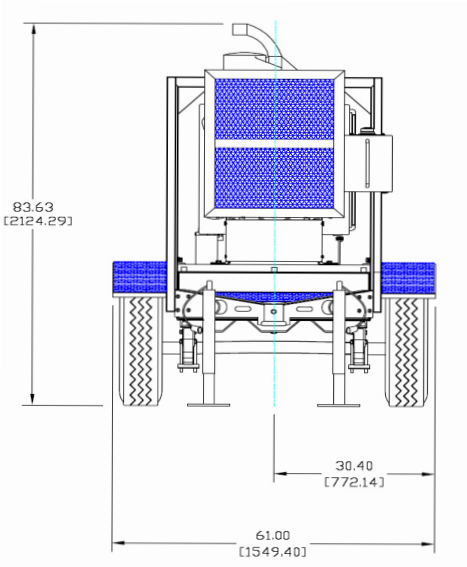

TOTAL HEAD
PSI FT

Performance Curve Model: H6MS-TD3.6L4
Size: 6" Materials/ Sludge Pump

