

Dynapac FC1300C II

Commercial pavers



Technical data



Masses

Mass (tractor)	7,900 lbs
Paver weight (incl. standard screed)	9,900 lbs



Dimensions

Working width, max.	13 ft
Working width, hydraulic extendable	13 ft
Working width, minimum (Cut Off Shoe)	1 ft
Front ramp angle	11°
Transport width	6 ft



Capacity

Theoretical placement capacity	180 t/h
Paving thickness (max/min)	6 in / 0 in



Undercarriage

Type	Steel Track with Poly Pads
Crawler length	40.0 in
Crawler width	12.0 in
Final drive	Hydrostatic w/Gear Reducer



Propulsion

Paving speed	0-30 mpm
Transport speed	3 mph



Engine

Manufacturer/Model	Kubota D1505
Emissions according to	EPA T4f/EU4
Rated power, SAE J1995	24 hp @ 2300 rpm
Electrical system	12 V
Fuel tank capacity	20 gal
Engine alternator capacity	60 Amps



Engine

Manufacturer/Model	Kubota D1505, EPA T3
Rated power	38 hp @ 2300 rpm
Rated power [engine 2, kW]	28 kW
Rated power [engine 2, rpm]	2,200 rpm



Material hopper

Capacity	12,125.49 lbs
Dumping height, center	23.03 in
Hopper width, internal	115 in



Auger

Auger diameter	9 in
Auger control	Automatic with wisker switch
Extension auger	9 in, mounted on screed ext

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



dynapac_fc1300c_ii_us-20190925.084629.pdf 2019-09-25 08:46

Dynapac FC1300C II

Commercial pavers



Technical data

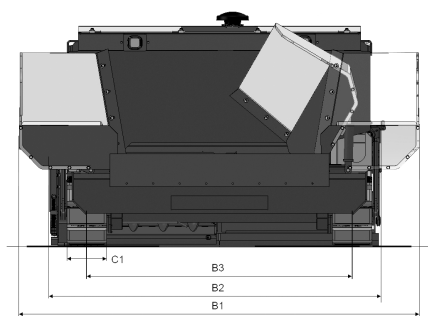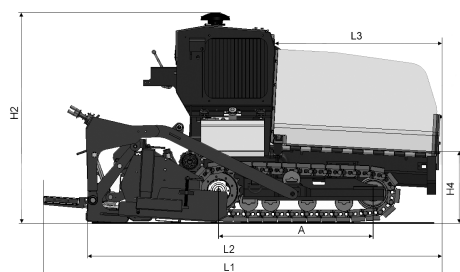

Dimensions

A. Axle track	40 in
B1. Width, max.	115 in
B2. Width, standard	90 in
B3. Width, center of tracks	80 in
C1. Track width	12 in
H2. Height, transport	68 in
H4. Dumping height	585 mm
L1. Length, total	118 in
L2. Length, transport	118 in
L3. Length, hopper	60 in



Standard equipment

Poly pad tracks, Backup Alarm, Rotating Beacon Wash down spray system, Dual operator station, Automatic auger feed control Screed Extension & main heat, Auto Flame-Out, Continuous-Ignition Screed Heating Extending Walkboard, Smooth Tandem Pump Steering with a Positive Neutral



Optional equipment

Slope Meter mechanical, Cut Off Plates, Umbrella



Suitable screeds

Model	Basic width	Working width, hydraulic extendable	Working width, max.	Compacting elements	Heating system
Dynapac VF0813C	8 ft	13 ft	13 ft	Vibration	Propane (LPG)

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_fc1300c_ii_us-20190925.084629.pdf 2019-09-25 08:46