



Dynapac FC1400C II


Commercial pavers




Technical data


|  Masses | |
|---|------------|
| Mass (tractor) | 9,500 lbs |
| Paver weight (incl. standard screed) | 12,700 lbs |


|  Dimensions | |
|--|-------|
| Working width, max. | 14 ft |
| Working width, hydraulic extendable | 14 ft |
| Working width, minimum (Cut Off Shoe) | 1 ft |
| Front ramp angle | 11° |
| Transport width | 6 ft |


|  Capacity | |
|--|-------------|
| Theoretical placement capacity | 400 t/h |
| Paving thickness (max/min) | 6 in / 0 in |


|  Undercarriage | |
|---|-------------------------------|
| Type | Steel track with poly pad |
| Crawler length | 55.0 in |
| Crawler width | 12.0 in |
| Final drive | Hydrostatic with gear reducer |


|  Propulsion | |
|--|----------|
| Paving speed | 0-43 mpm |
| Transport speed | 3 mph |

|  Engine | |
|---|----------------------|
| Manufacturer/Model | Cummins QSF 2.8 |
| Emissions according to | EPA T4F/EU4 |
| Rated power, SAE J1995 | 74 hp @ 2200 rpm |
| Electrical system | 12V |
| Fuel tank capacity | 14.0 gal |
| Engine alternator capacity | 120 Amps |
| Heating generator capacity | 12 kw, 240v, 1 Phase |

|  Engine | |
|--|-------------------------|
| Manufacturer/Model | Cummins QSF 2.8, EPA T3 |
| Rated power | 54 kw (72 hp) |
| Rated power [engine 2, rpm] | 2,200 rpm |

|  Material hopper | |
|---|---------------|
| Capacity | 13,227.80 lbs |
| Dumping height, center | 21 in |
| Hopper width, internal | 120 in |

|  Conveyor | |
|--|--------------------|
| Conveyor type | Dual slat conveyor |
| Conveyor width | 24 in |
| Conveyor control | On / Off |

|  Auger | |
|---|--|
| Auger diameter | 9 in |
| Auger control | Automatically with ultrasonic sensor |
| Extension auger | 9 inches, mounted on screed extensions |

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



dynapac_fc1400c_ii_us-20190926.164401.pdf 2019-09-26 16:44

Dynapac FC1400C II

Commercial pavers



Technical data

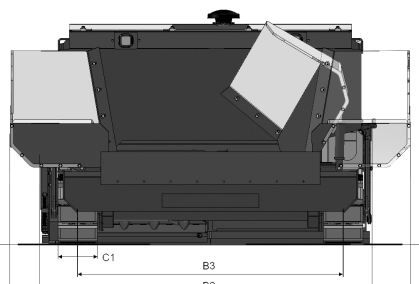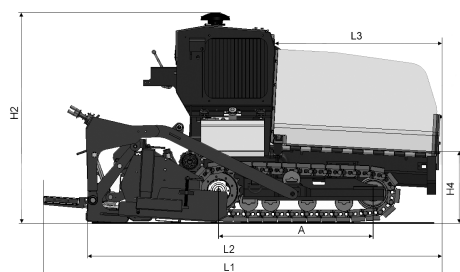

Dimensions

| | |
|-----------------------------|--------|
| A. Axle track | 55 in |
| B1. Width, max. | 125 in |
| B2. Width, standard | 102 in |
| B3. Width, center of tracks | 80 in |
| C1. Track width | 12 in |
| H2. Height, transport | 64 in |
| H4. Dumping height | 21 in |
| L1. Length, total | 136 in |
| L2. Length, transport | 136 in |
| L3. Length, hopper | 60 in |



Standard equipment

LED Work Lights, Backup Alarm & Rotating Beacon, Reversible auger and conveyor, Rebuildable wear resistance conveyor floor plates, Segmented High Wear Augers, Dyn@Link Telematics, Ultrasonic sensors auger, Wash down spray system, Dual operator console with conventional electrics



Optional equipment

Cut-Off plates, Truck Hitch, Umbrella



Suitable screeds

| Model | Basic width | Working width, hydraulic extendable | Working width, max. | Compacting elements | Heating system |
|--------------------------|-------------|-------------------------------------|---------------------|---------------------|----------------|
| Dynapac VF0814C Electric | 8 ft | 14 ft | 14 ft | Vibration | Electric |

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_fc1400c_ii_us-20190926.164401.pdf 2019-09-26 16:44