



## TECHNICAL DATA

### MASSES

Transport mass	44,100 lbs
----------------	------------

### DIMENSIONS

Transport length	30 ft
Transport width	8 ft
Transport height	10 in
Front ramp angle	10°

### MATERIAL HOPPER

Capacity	7 m³ (13 t)
----------	-------------

### PROPULSION

Operating speed, max	82 ft/min
Transport speed, max	2.5 mph

### ENGINE

Manufacturer/Model	Cummins B 6.7-C225
Rated power, SAE J1995	168 kW (225 hp ) @ 2,200 rpm
Electrical system	24 V
Emissions according to	EU Stage V /EPA Tier 4f
Fuel tank capacity	95 gal

### ENGINE

Manufacturer/Model	Cummins QSB 6.7-C220
Rated power, SAE J1995	164 kW (220 hp ) @ 2200 rpm
Electrical system	24 V
Emissions according to	EU Stage III /EPA Tier 3
Fuel tank capacity	79.26 gal

### CONVEYOR



Conveyor type	Rubber belt on two chains mounted with metal stiffeners.
Conveyor speed	Constantly variable
Conveyor width	47.24 in
Feeding height (max/min)	98 in /87 in
Feed capacity	4000 t/h
Feed capacity, optional swing conveyor	2000 t/h

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



## DIMENSIONS

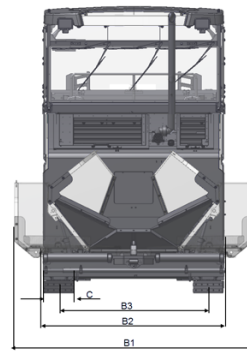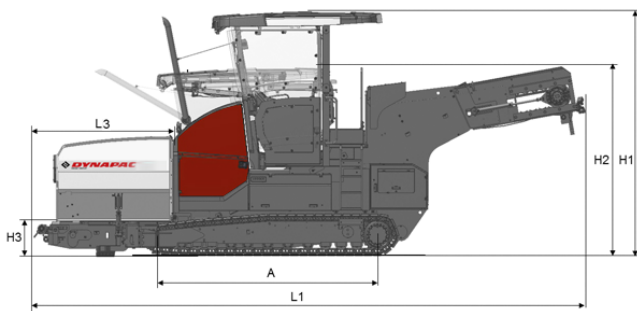

### DIMENSIONS

A. Axle track	154 in
B1. Width, max.	100 in
B2. Width, standard	8 ft
B3. Width, center of tracks	82 in
C1. Track width	13 in
H1. Height, max.	157 in
H2. Height	22.44 in
H3. Height, transport	10 in
H4. Dumping height	16 ft
L1. Length	30 ft
L3. Length, hopper	90.16 in

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.