

B50E Articulated Dump Truck



ENGINE Manufacturer Mercedes Benz (MTU)		Torque Control Hydrodynamic with lock-up in all gears		Total Retardation Power Continuous: 732 hp (546 kW) Maximum: 1,291 hp (963 kW)		Steering Angle 42°	
Model OM473LA (MTU 6R 1500)		TRANSFER CASE Manufacturer Kessler		WHEELS Type Radial Earthmover		DUMPING SYSTEM Two double-acting, single stage, dump cylinders	
Configuration Inline 6, turbocharged and intercooled		Series W2400		Tire 875/65 R 29 (29.5 R 25 optional)		Raise Time 11.5 seconds	
Maximum Net Power 577 hp (430 kW) at 1,600 rpm in accordance with UN ECE R120		Layout Remote mounted		FRONT SUSPENSION Semi-independent, leading A-frame supported by hydro-pneumatic suspension struts. Suspension is electronically controlled adaptive suspension with ride height adjustment.		Lowering Time 6 seconds	
Gross Torque 2,102 lbft (2,850 Nm) @ 1,300 rpm		Gear Layout Three in-line helical gears		REAR SUSPENSION Pivoting walking beams with laminated rubber suspension blocks Option: Comfort Ride suspension walking beams, with two-stage sandwich block		Tipping Angle 70 deg standard, or any lower angle programmable	
Displacement 952 cu.in (15.6 liters)		Output Differential Interaxle 29/71 proportional differential. Automatic inter-axle differential lock.		HYDRAULIC SYSTEM Full load sensing system serving the prioritized steering, body tipping, suspension and brake functions. A ground-driven, load sensing emergency steering pump is integrated into the main system.		PNEUMATIC SYSTEM Air drier with heater and integral unloader valve, serving park brake and auxiliary functions	
Auxiliary Brake Jacobs Engine Brake®		AXLES Manufacturer Bell		System Pressure 117 psi (8.1 Bar)		ELECTRICAL SYSTEM Voltage 24 V	
Fuel Tank Capacity 130 US gal (494 liters)		Model 30T		Battery Type Two AGM (Absorption Glass Mat) type		Battery Capacity 2 X 75 Ah	
AdBlue® Tank Capacity 11 US gal (40 liters)		Differential High input controlled traction differential with spiral bevel gears		Alternator Rating 28V 80A		MAX. VEHICLE SPEED	
Certification OM473LA (MTU 6R 1500) meets EPA Tier 4 final/Stage V emissions regulations		Final Drive Outboard heavy duty planetary on all axles		STEERING SYSTEM Double acting cylinders, with ground-driven emergency steering pump		CAB ROPS/FOPS certified 74 dBA internal sound level measured according to ISO 6396	
TRANSMISSION Manufacturer Allison		BRAKING SYSTEM Service Brake Dual circuit, full hydraulic actuation wet disc brakes on front, middle and rear axles. Wet brake oil is circulated through a filtration and cooling system.		Lock to lock turns 4.9			
Model 4800 ORS		Maximum brake force: 109,707 lbf (488 kN)					
Configuration Fully automatic planetary transmission		Park & Emergency Spring applied, air released driveline mounted disc					
Layout Engine mounted		Maximum brake force: 215.5 kN (48,446 lbf)					
Gear Layout Constant meshing planetary gears, clutch operated		Auxiliary Brake Automatic Jacobs Engine Brake®. Automatic retardation through electronic activation of wet brake system.					
Gears 7 Forward, 1 reverse							
Clutch Type Hydraulically operated multi-disc							
Control Type Electronic							


Load Capacity & Ground Pressure

OPERATING WEIGHTS		GROUND PRESSURE*		LOAD CAPACITY		OPTION WEIGHTS	
UNLADEN	kg (lb)	LADEN		BODY	m³ (yd³)		kg (lb)
Front	18,313 (40,373)	(No sinkage/Total Contact Area Method)		Struck Capacity	21.5 (28)	Bin liner	1,495 (3,296)
Middle	10,039 (22,132)	875/65 R29	kPa (Psi)	SAE 2:1 Capacity	27.5 (36)	Tailgate	1,117 (2,463)
Rear	9,934 (21,901)	Front	296 (43)	SAE 1:1 Capacity	33 (43)	29.5 R 25	
Total	38,287 (84,408)	Mid & Rear	366 (53)	SAE 2:1 Capacity with Tailgate	29 (38)	(per vehicle) Minus	1,182 (2,606)
LADEN						EXTRA WHEELSET	
Front	24,034 (52,986)	29.5 R 25	kPa (Psi)			29.5 R 25	800 (1,764)
Middle	29,879 (65,872)	Front	326 (47)	Rated Payload	45,400 kg	875/65 R29	1,024 (2,258)
Rear	29,774 (65,640)	Mid & Rear	395 (57)		(100,090 lb)		
Total	83,687 (184,498)						

* 29.5R25 Ground pressures calculated with Michelin XADN+ Tire. 875/65 R29 Groundpressures calculated with Michelin XAD65-1 Tire.

Dimensions

B50E

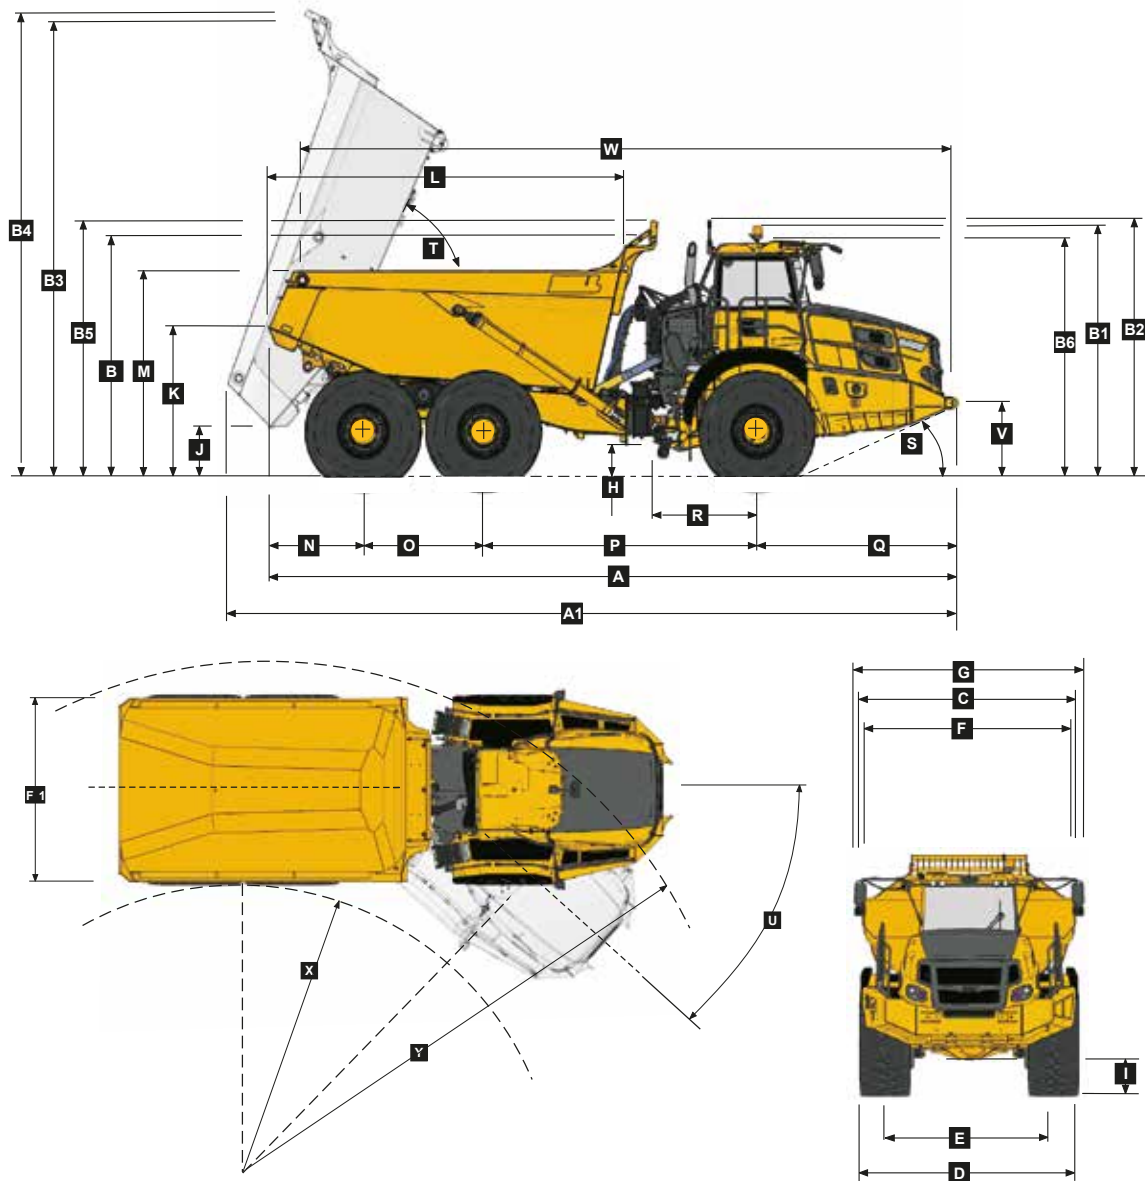


Machine Dimensions

A	Length - Transport Position with Tailgate	11,272 mm	(37 ft.)
A	Length - Transport Position w/o Tailgate	11,272 mm	(37 ft.)
A1	Length - Bin Fully Tipped	11,916 mm	(39 ft. 1 in.)
B	Height - Transport Position w/o Rock Guard	3,822 mm	(12 ft. 6 in.)
B	Height - Transport Position with Rock Guard	3,870 mm	(12 ft. 8 in.)
B1	Height - Rotating Beacon	4,050 mm	(13 ft. 3 in.)
B2	Height - Load Light	4,141 mm	(13 ft. 7 in.)
B3	Bin Height - Fully Tipped w/o Rock Guard	7,325 mm	(24 ft.)
B4	Bin Height - Fully Tipped with Rock Guard	7,430 mm	(24 ft. 5 in.)
B5	Height - Rock Guard Operating Position	4,148 mm	(13 ft. 7 in.)
B6	Height - Cab	3,813 mm	(12 ft. 6 in.)
C	Width over Mudguards	3,790 mm	(12 ft. 5 in.)
D	Width over Tires - 875/65 R29	3,832 mm	(12 ft. 7 in.)
D	Width over Tires - 29.5R25	3,714 mm	(12 ft. 2 in.)
E	Tire Track Width - 875/65 R29	2,949 mm	(9 ft. 8 in.)
E	Tire Track Width - 29.5R25	2,952 mm	(9 ft. 8 in.)
F	Width over Bin	3,735 mm	(12 ft. 3 in.)
F1	Width over Tailgate	4,057 mm	(13 ft. 4 in.)
G	Width over Mirrors - Operating Position	4,027 mm	(13 ft. 3 in.)
H	Ground Clearance - Artic	558 mm	(22 in.)
I	Ground Clearance - Front Axle	555 mm	(21.9 in.)
J	Ground Clearance - Bin Fully Tipped	907 mm	(35.7 in.)
K	Bin Lip Height - Transport Position	2,542 mm	(8 ft. 4 in.)
L	Bin Length	5,714 mm	(18 ft. 9 in.)
M	Load over Height	3,390 mm	(11 ft. 1 in.)
N	Rear Axle Center to Bin Rear	1,533 mm	(5 ft.)
O	Mid Axle Center to Rear Axle Center	1,950 mm	(6 ft. 5 in.)
P	Mid Axle Center to Front Axle Center	4,438 mm	(14 ft. 7 in.)
Q	Front Axle Center to Machine Front	3,351 mm	(11 ft.)
R	Front Axle Center to Artic Center	1,558 mm	(5 ft. 1 in.)
S	Approach Angle	23 °	
T	Maximum Bin Tip Angle	70 °	
U	Maximum Articulation Angle	42 °	
V	Front Tie Down Height	1,269 mm	(4 ft. 2 in.)
W	Machine Lifting Centers	10,632 mm	(34 ft. 11 in.)
X	Inner Turning Circle Radius - 875/65R29	4,694 mm	(15 ft. 5 in.)
X	Inner Turning Circle Radius - 29.5R25	4,753 mm	(15 ft. 7 in.)
Y	Outer Turning Circle Radius - 875/65R29	9,408 mm	(30 ft. 10 in.)
Y	Outer Turning Circle Radius - 29.5R25	9,349 mm	(30 ft. 8 in.)


Gradeability/Rimpull

1. Determine tractive resistance by finding intersection of vehicle mass line and grade line. NOTE: 2% typical rolling resistance is already assumed in chart and grade line.
2. From this intersection, move straight right across charts until line intersects rimpull curve.
3. Read down from this point to determine maximum speed attained at that tractive resistance.

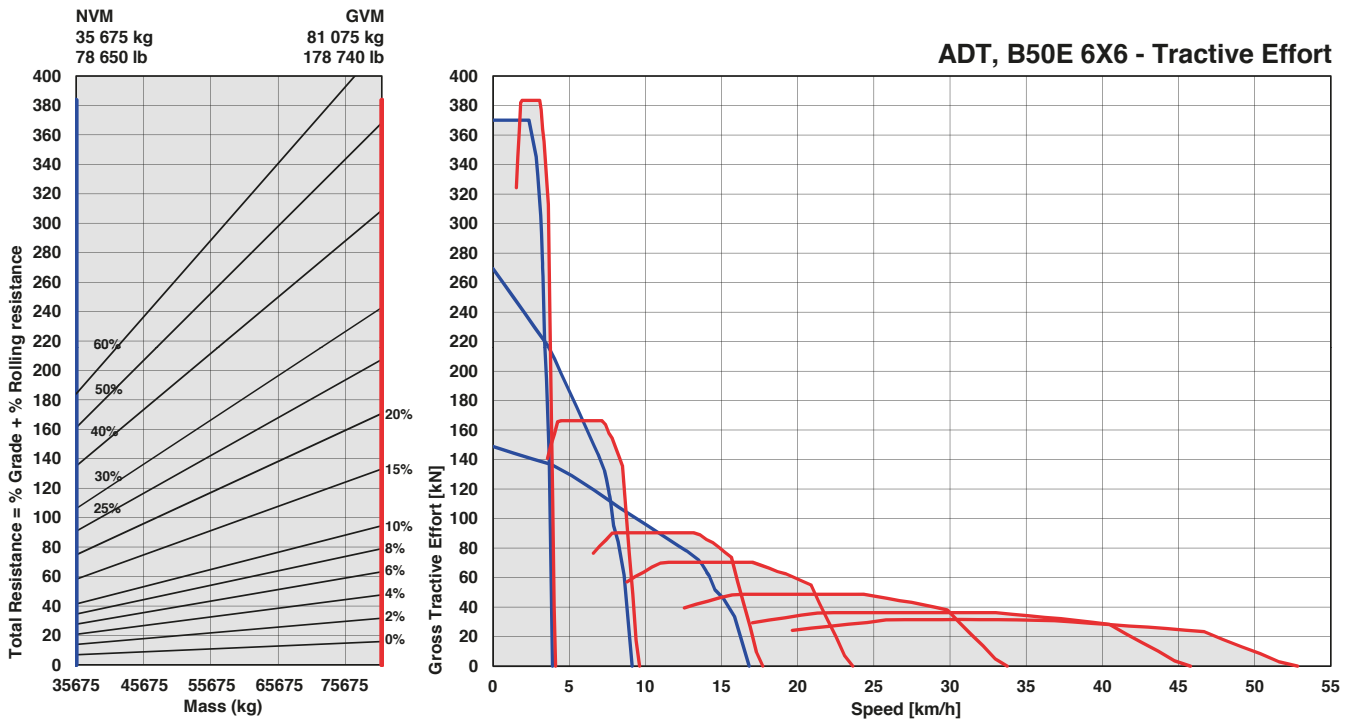

Retardation

1. Determine retardation force required by finding intersection of vehicle mass line.
2. From this intersection, move straight right across charts until line intersects the curve. NOTE: 2% typical rolling resistance is already assumed in chart.
3. Read down from this point to determine maximum speed.

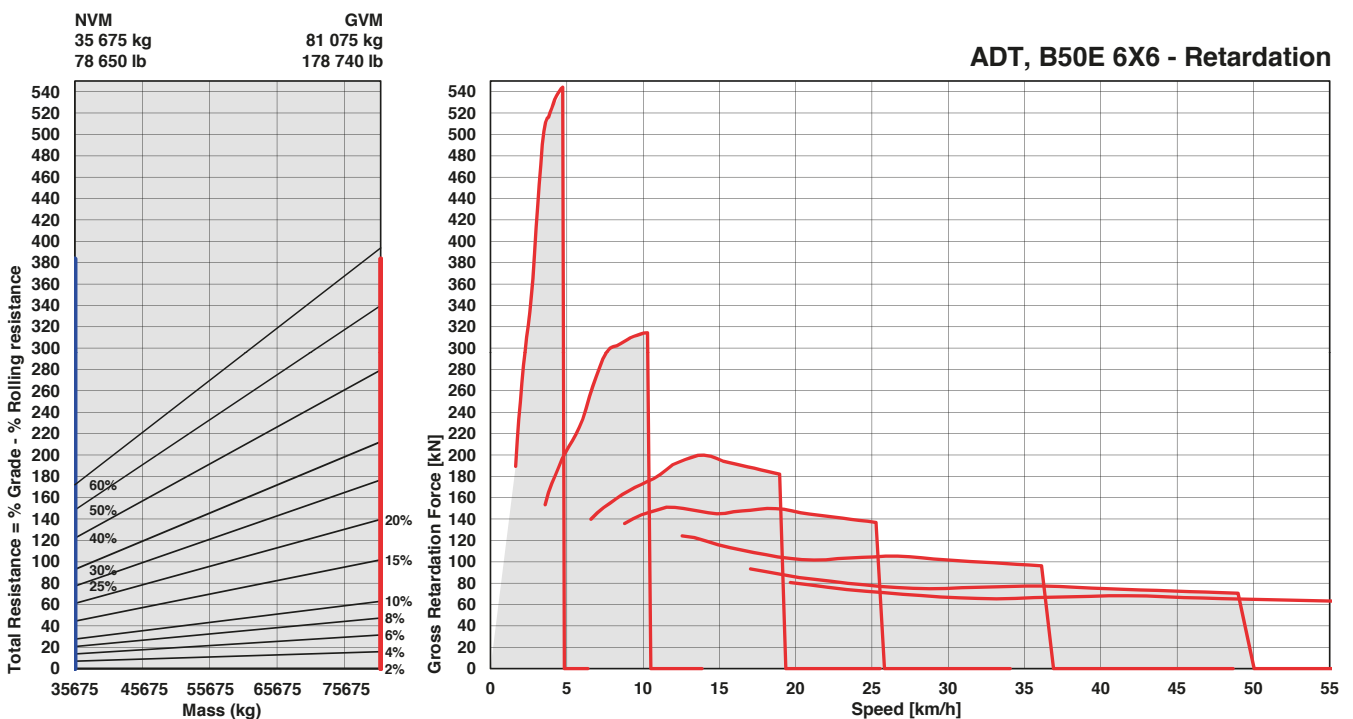

Features and Options

● STANDARD ▲ OPTION

B40E	B45E	B50E	
			ENGINE
●	●	●	Jacobs Engine Brake®
●	●	●	Dual element air cleaner with dust ejector valve
●	●	●	Precleaner with automatic dust scavenging
●	●	●	Water separator
●	●	●	Serpentine drive belt with automatic tensioner
●	●	●	Provision for fast fill
●	●	●	Wet-sleeve cylinder liners
			COOLING
●	●	●	Crankshaft mounted electronically controlled viscous fan drive
●	●	●	Fan guard
			PNEUMATIC SYSTEM
●	●	●	Engine-mounted compressor
●	●	●	Air drier with heater
●	●	●	Integral unloader valve
			ELECTRICAL SYSTEM
●	●	●	Battery disconnect
●	●	●	Halogen drive lights
▲	▲	▲	LED drive lights
●	●	●	Air horn
●	●	●	Reverse alarm
▲	▲	▲	White noise reverse alarm
●	●	●	Rotating beacon
●	●	●	Rear flashing lights
●	●	●	Pitch Roll Sensor
●	●	●	Halogen Artic reverse light
▲	▲	▲	LED Artic reverse light
●	●	●	LED reverse lights
			STEERING SYSTEM
●	●	●	Bi-directional ground-driven secondary steering pump
			CAB
●	●	●	ROPS/FOPS certification
●	●	●	Tilt cab
●	●	●	Gas strut-supported door
●	●	●	I-Tip programmable dump-body tip settings
●	●	●	HVAC Climate control system
●	●	●	AM/FM radio with Aux + USB
●	●	●	Rear window guard
●	●	●	Wiper/washer with intermittent control
●	●	●	Tilt and telescoping steering wheel
●	●	●	Centre-mount air-suspension seat
●	●	●	Halogen work lights
▲	▲	▲	LED work lights
▲	▲	▲	Rotating beacon: seat belt installation
▲	▲	▲	Remote engine and machine isolation
●	●	●	Remote battery jump start
●	●	●	Retractable 3-point seat belt
●	●	●	Heated seat
●	●	●	Foldaway trainer seat with retractable seat belt
●	●	●	12-volt power outlet
●	●	●	Cab utility bin (removable)
●	●	●	Cup holder

B40E	B45E	B50E	
			CAB (continued)
●	●	●	Cooled/heated lunch box
			Manually adjusted mirrors
			Heated mirrors
●	●	●	Electrically adjusted and heated mirrors
●	●	●	Deluxe 10" color LCD:
			Speedometer / Fuel gauge / Transmission oil temperature gauge / Engine coolant temperature gauge / LED function/warning indicators and audible alarm / Transmission gear selection / Tachometer / Battery voltage / Hour meter / Odometer / Fuel consumption / Tip counter / Trip timer / Trip distance / Metric/English units / Service codes/diagnostics
●	●	●	Backlit sealed switch module functions with:
			Wiper control / Lights / Heated mirrors / Retarding aggressiveness / Transfer case differential lock / Transmission gear hold / Dump-body tip limit / Automatic dump-body tip settings / Airconditioner/ Heater controls / Preselected Speed Control
			DUMP BODY
●	●	●	Dump body mechanical locks (x2). Partially up and fully up
▲	▲	▲	Body liner
▲	▲	▲	Tailgate
▲	▲	▲	Body heater
▲	▲	▲	Less dump body and cylinders
▲	▲	▲	Low SG bin extensions
▲	▲	▲	Bin pole lockout
			OTHER
●	●	●	Automatic Traction Control (ATC)
●	●	●	Wet disc brakes
●	●	▲	29.5 R 25 Radial Earthmover tires
▲	▲	●	875/65 R 29 Radial Earthmover tires
●	●	●	Remote grease banks
▲	▲	●	Automatic greasing
●	●	●	Onboard weighing
▲	▲	▲	Load lights: stack
▲	▲	●	Comfort ride suspension (front)
▲	▲	▲	Comfort ride suspension (rear)
●	●	●	Reverse camera
●	●	●	Hand rails
●	●	●	Cab peak
▲	▲	▲	High pressure hydraulic filter
▲	▲	▲	Fuel heater
●	●	●	Belly cover
▲	▲	▲	Remote transmission filters
●	●	●	Engine and transmission remote drain-gravity
▲	▲	▲	Engine and transmission remote drain-scavenge
▲	▲	▲	Window smash button
●	●	●	High visibility mirrors
●	●	●	Fleetm@tic® Classic package for 2 years
●	●	●	Electronic hood opening



All dimensions are shown in millimeters, unless otherwise stated between brackets. Under our policy of continuous improvement, we reserve the right to change technical data and design without prior notice. Photographs featured in this brochure may include optional equipment. Blu@dvantage™ is a trademark of Bell Equipment Co. (PTY) Ltd AdBlue® is a registered trademark of VDA

BELL INTERNATIONAL: Tel: +27 (0)35-907 9431

E-mail: marketing@bellequipment.com

Web: www.bellequipment.com



Tel: +61 (0)8-9355-2442



Tel: +49 (0)6631 / 91-13-0



Tel: +27 (0)11-928-9700



Tel: +44 (0)1283-712862



Tel: +33 (0)5-55-89-23-56



Tel: +7-495-287-80-02



Tel: (704) 655-2802

• A640E30 • A645E30 • A650E30

**Strong Reliable Machines
Strong Reliable Support**

BELL