



## TECHNICAL DATA

### MASSES

Max. operating mass	19,600 lbs
Operating mass (incl. ROPS)	17,400 lbs
Module mass (front/rear)	9,500 lbs/7,900 lbs

### COMPACTION

Wheel load	1,980 (pounds/wheel)
Centrifugal force (high/low amplitude)	18,440/16,190 lbs
Nominal amplitude (high/low)	0.02/0.01 in
Static linear load	140 lbs/in
Vibration frequency (high/low amplitude)	2,880/4,020 vpm
Water tank	198 gal
Emulsion tank	21 gal
Split drums	Yes

### COMPACTION (CE)

Centrifugal force (high/low amplitude)	79 kN/55 kN
Vibration frequency (high/low amplitude)	48/62 Hz

### PROPULSION

Speed range	0-7,5 mph
Vertical oscillation	±7
Max. theoretical gradeability	43 %

### ENGINE

Manufacturer/Model	Deutz TCD 3.6 HT T4f
Type	Water cooled turbo Diesel
Rated power, SAE J1995	55 kW (74 hp ) @ 2,200 rpm
Fuel tank capacity	34 gal

### ENGINE

Manufacturer/Model	Cummins QSB 3.8 IIIA/T3
Type	Water cooled turbo Diesel
Rated power, SAE J1995	74 kW (99 hp ) @ 2,200 rpm

### ENGINE



Manufacturer/Model	Deutz TCD 3.6 HT StageV
Type	Water cooled turbo Diesel
Rated power, SAE J1995	55 kW (74 hp ) @ 2,200 rpm

### HYDRAULIC SYSTEM

Driving	Axial piston pump with variable displacement. Axial piston motors (4) with variable displacement.
Vibration	Axial piston pump with variable displacement. Axial piston motor with constant displacement.
Steering	Gear pump with constant displacem.
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in both drums.

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.

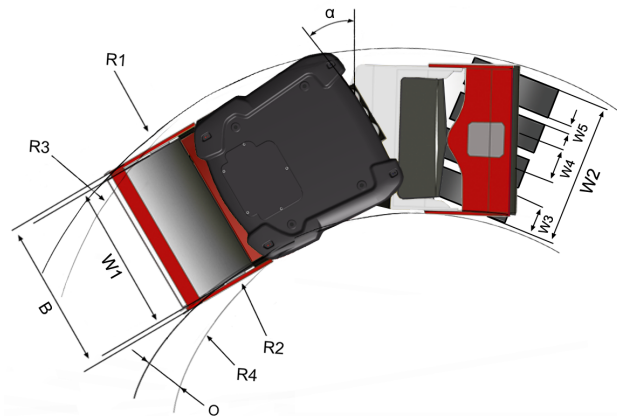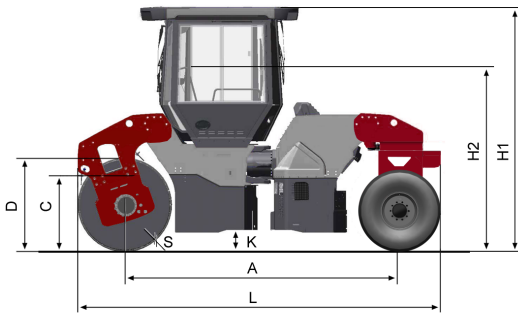

## DIMENSIONS

### DIMENSIONS

A. Wheelbase	131 in
B. Width	74 in
C. Curb clearance	28 in
D. Drum diameter	45 in
H1. Height, with ROPS/cab	118 in
K. Ground clearance	11 in
L. Length	177 in
O. Off-set	13 in
R1. Turning radius, outside	263 in
R2. Turning radius, inside	195 in
R3. Turning radius with off-set, outside	197 in
R4. Turning radius with off-set, inside	129 in
S. Drum shell thickness	0.7 in
W1. Drum width	68 in
W2. Width, wheel module	65 in
W3. Width, tire	11 in
W4. Wheel track	18 in
W5. Wheel spacing	6 in
α. Steering angle	±32°

### OPTIONAL EQUIPMENT

#### Air Conditioning /Automatic Climate Control (ACC) (Optional)

- The system contains fluorinated greenhouse gases.
- Coolant designation: HFC-134a
- Coolant weight when full: 1,35 kg
- CO<sub>2</sub>-equivalent: 1,930 ton
- GWP: 1430

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.