



TECHNICAL DATA

MASSES

Max. operating mass	32,800 lbs
Operating mass (incl. ROPS)	26,000 lbs
Module mass (front/rear)	13,000 lbs/13,000 lbs

COMPACTION

Centrifugal force (high/low amplitude)	32,370 lb/20,910 lb
Nominal amplitude (high/low)	0.031 in/0.012 in
Static linear load (front/rear)	170 pli/170 pli
Vibration frequency (high/low amplitude)	3,060 vpm/4,020 vpm
Water tank	224 gal/(277 gal w. opt. watert.)
Water tank (front drum steering)	227 gal

COMPACTION (CE)

Centrifugal force (high/low amplitude)	23,820 lb/15,280 lb
Vibration frequency (high/low amplitude)	2,640 vpm/3,480 vpm

PROPULSION

Speed range	0-7.5 mph
Vertical oscillation	±7°
Max. theoretical gradeability	34 %

ENGINE

Manufacturer/Model	Cummins F3.8 V
Type	Water cooled turbo diesel
Rated power, SAE J1995	100 kW (135 hp) @ 2,200 rpm
Fuel tank capacity	48 gal
DEF tank capacity	4 gal

ENGINE

Manufacturer/Model	Cummins QSF3.8 IV/T4f
Type	Water cooled turbo diesel
Rated power, SAE J1995	97 kW (130 hp) @ 2,200 rpm
Fuel tank capacity	47.56 gal
DEF tank capacity	3.96 gal

ENGINE



Manufacturer/Model	Cummins QSF 3.8 IIIA/T3
Type	Water cooled turbo diesel
Rated power, SAE J1995	104 kW (140 hp) @ 2,200 rpm

HYDRAULIC SYSTEM

Driving	Axial piston pump with variable displacement. Radial piston motors (2) with variable displacement.
Vibration	Axial piston pumps (2) with variable displacement. Axial piston motors (2) with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/Emergency brake	Failsafe multidisc brake in both drums.

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.

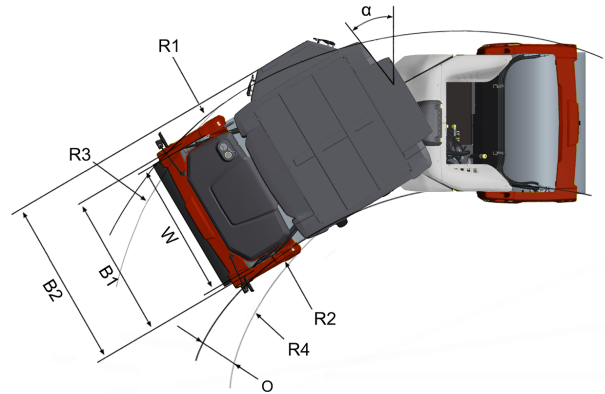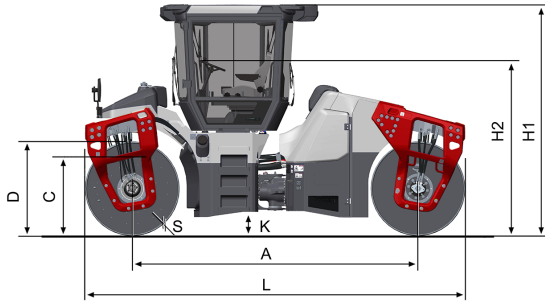

DIMENSIONS

DIMENSIONS

A. Wheelbase	148 in
B1. Width, front	86 in
B2. Width, with cab	95 in
C. Curb clearance	32 in
D. Drum diameter	51 in
H. Height, with ROPS/cab	118 in
K. Ground clearance	12 in
L. Length	199 in
O. Off-set	20.5 in
R1. Turning radius, outside	292 in
R2. Turning radius, inside	215 in
R3. Turning radius with off-set, outside	220 in
R4. Turning radius with off-set, inside	143 in
S. Drum shell thickness	0.79 in
W. Working width	77 in
α. Steering angle	±32°

OPTIONAL EQUIPMENT

Air Conditioning /Automatic Climate Control (ACC) (Optional)

- The system contains fluorinated greenhouse gases.
- Coolant designation: HFC-134a
- Coolant weight when full: 1,6 kg
- CO₂-equivalent: 2,288 ton
- GWP: 1430

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all information's are supplied without liability.