

CA1500DSingle drum vibratory rollers





TECHNICAL DATA

MASSES

Operating mass (incl. ROPS) 15,500 lbs
Operating mass (incl. Cab) 15,900 lbs
Module mass (front/rear) 7,750 lbs/7,750 lbs
Max. operating mass 18,700 lbs

COMPACTION

Static linear load

Nominal amplitude (high/low)

Vibration frequency (high/low amplitude)
SEISMIC available (values for manual mode)

Centrifugal force (high/low amplitude)

SEISMIC available (values for manual vpm

29,900 lbs/16,200 lbs

PROPULSION

Speed range 8 /12 /12 km/h
Tire size (8 ply) 14.9 x 24 TL
Max. theoretical gradeability 55 %
Vertical oscillation ±9°

ENGINE

Manufacturer/Model Deutz TD3.6/DPF (V)

Type Water cooled turbo Diesel

Rated power, ISO 14396 55 kW (75 hp) @ 2200 rpm

Fuel tank capacity 50 gal

ENGINE

Manufacturer/Model Cummins QSB3.3 (IIIA/T3)

Type Water cooled turbo Diesel

Rated power, ISO 14396 74 kW (100 hp) @ 2,200 rpm

Fuel tank capacity 50 gal

ENGINE

Manufacturer/Model Cummins QSB3.3 (IIIA/T3)

Type Water cooled turbo Diesel

Rated power, SAE J1995 82 kW (110 hp) @ 2200 rpm

HYDRAULIC SYSTEM

Driving Hydrostatic

Vibration Hydrostatic


Steering Hydrostatic


Service brake Hydrostatic in forward and reverse lever.

Parking/ Failsafe multidisc brake in drum gear box Emergency brake and in rear axle.



CA1500DSingle drum vibratory rollers

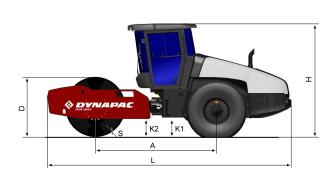

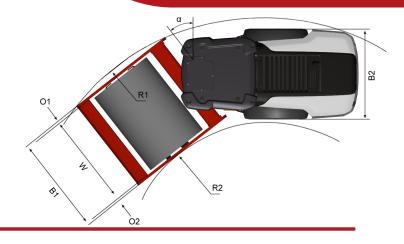

DIMENSIONS

DIMENSIONS

A. Wheelbase	106 in
B1. Width, front	73 in
B2. Width, rear	67 in
D. Drum diameter	48 in
H. Height, with ROPS/cab	107 in
K1. Ground clearance	13 in
K2. Curb clearance	14 in
L. Length	208 in
O1. Overhang, right	4 in
O2. Overhang, left	4 in
R1. Turning radius, outside	16 ft
R2. Turning radius, inside	10 ft
S. Drum shell thickness	0.87 in
W. Working width	66 in
α. Steering angle	±38°

OPTIONAL EQUIPMENT

Air Conditioning /Automatic Climate Control (ACC) (Optional)

- The system contains fluorinated greenhouse gases.
- Coolant designation: HFC-134a
- Coolant weight when full: 1,35 kg
- CO,-equivalent: 1,930 ton
- GWP: 1430