

Technical sheet :

ATJ 46+



 **MANITOU**
HANDLING YOUR WORLD


Capacities		Imperial
Working height	h21	52 ft 6 in
Platform height	h7	45 ft 6 in
Max. outreach		28 ft 3 in
Overhang		26 ft 8 in
Pendular arm rotation (bottom)		+66 °
Platform capacity	Q	899 lb
Turret rotation		360 °
Platform rotation (left)		90 °
Weight and dimensions		
Platform weight*		18047 lb
Platform dimensions (length x width)	lp / ep	7 ft 7 in x 2 ft 11 in
Overall length	l1	22 ft 8 in
Overall width	b1	7 ft 7 in
Overall height	h17	8 ft 10 in
Overall length (stowed)	l9	14 ft 9 in
Overall height (stowed)	h18	7 ft 9 in
Floor height (access)	h20	1 ft 4 in
Counterweight offset (turret at 90°)	a7	9 in
External turning radius	Wa3	12 ft
Ground clearance at centre of wheelbase	m2	1 ft 5 in
Wheelbase	y	7 ft 3 in
Performances		
Drive speed - stowed		4 mi/h
Drive speed - raised		0.62 mi/h
Gradeability		40 %
Wheels		
Tyres type		Foam-filled
Standard tyres		36 x 15 D610 / 910 x 370 mm
Drive wheels (front / rear)		2 / 2
Steering wheels (front / rear)		2 / 2
Braking wheels (front / rear)		0 / 2
Engine/Battery		
Engine brand / model		Kubota - D1803-CR
Engine norm		Tier 4 final
I.C. Engine power rating / Power (kW)		24.80 Hp / 18 kW
Miscellaneous		
Ground Pressure		139 PSI
Hydraulic Pressure		4931 PSI
Hydraulic tank capacity		14 US gal
Fuel tank		14 US gal
Noise to environment (LwA)		< 105 dB
Standards compliance		
This machine is in compliance with:		ANSI A92.20-2018 CSA B354.6 ICES-002-Issue 6 Standard Canadian EMC

ATJ 46+ - Load chart

Load Chart for AWP Imperial



ATJ 46+ - Dimensional drawing

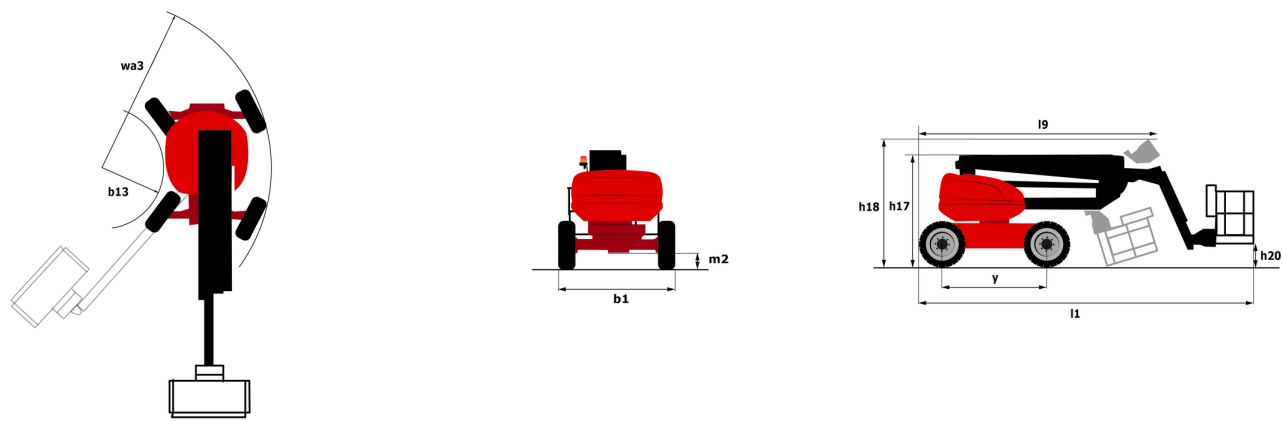

Equipment

Standard
110 V American plug with differential circuit breaker
4 simultaneous movements
4 wheel steer with crab mode
Additional storage boxes
Audible alarm and illuminated indicator lamp (leveling, overload, lowering)
Battery cut-off
CAN bus technology
Dead man pedal
Differential locking on rear axle
Drive safety orientation system
Easy Manager
Emergency stop button in platform and on frame
Front axle with limited slip
Fuel gauge with low level indicator
Galvanize basket mesh floor
Lift and drive
Lockable fuel cap
Management via engine speed bearing
Oscillating front axle
Pendular arm
Proportional controls
Protective cover for control panel
Steer and rotate
Swinging gate on platform

Optional
Beep on every movement
Beep upon travel
Biodegradable oil
Cold weather kit
Cold weather protection oil
Electric generator
Lockable turret cover
SMS : Safe Man System
Working light



Head Office

B.P. 249 - 430 rue de l'Aubinière

44150 Ancenis Cedex - France

Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes