

MAKE	MODEL	PLATFORM	CAPACITY	BASE PRICE
THIEMAN	STOW AWAY			
	MLB-16ET	72x32+5	1600	\$3,763.00
	MLB-16ET	84x32+5	1600	\$3,896.00
	MLB-20ET	72x32+5	2000	\$3,877.80
	MLB-20ET	84x32+5	2000	\$4,015.00
	MLB-16ET	72x38 WEDGE	1600	\$3,898.80
	MLB-16ET	84x38 WEDGE	1600	\$4,030.40
	MLB-20ET	72x38 WEDGE	2000	\$4,013.60
	MLB-20ET	84x38 WEDGE	2000	\$4,149.40
	MLB-16ET	72x42 WEDGE	1,600.00	\$3,856.80
	MLB-16ET	84x42 WEDGE	1,600.00	\$3,982.80
	MLB-20ET	72x42 WEDGE	2,000.00	\$3,994.00
	MLB-20ET	84x42 WEDGE	2,000.00	\$4,127.00
	MLB-25ET	72x42 WEDGE	2,500.00	\$4,185.80
	MLB-25ET	84x42 WEDGE	2,500.00	\$4,407.00
	MLB-16ETAL	72x27+6	1,600.00	\$4,750.00
	MLB-16ETAL	84x27+6	1,600.00	\$4,877.40
	MLB-20ETAL	72x27+6	2,000.00	\$4,866.20
	MLB-20ETAL	84x27+6	2,000.00	\$4,999.20
	MLB-16ETAL	72x37 Wedge	1,600.00	\$4,794.80
	MLB-16ETAL	84x37 Wedge	1,600.00	\$4,923.60
	MLB-20ETAL	72x37 Wedge	2,000.00	\$4,906.80
	MLB-20ETAL	84x37 Wedge	2,000.00	\$5,042.60
	M-16 ET	72x36+6	1,600.00	\$3,614.60
	M-16 ET	84x36+6	1,600.00	\$3,750.40
	M-20 ET	72x36+6	2,000.00	\$3,728.00
	M-20 ET	84x36+6	2,000.00	\$3,870.80
	M-25 ET	72x36+6	2,500.00	\$3,936.60
	M-25 ET	84x36+6	2,500.00	\$4,129.80
	M-30 ET	72x36+6	3,000.00	\$4,170.40
	M-30 ET	84x36+6	3,000.00	\$4,317.40
	M-16 ET	72x42+6	1,600.00	\$3,978.60
	M-16 ET	84x42+6	1,600.00	\$4,106.00

	M-20 ET	72x42+6	2,000.00	\$4,093.40
	M-20 ET	84x42+6	2,000.00	\$4,227.80
	M-25 ET	72x42+6	2,500.00	\$4,300.60
	M-25 ET	84x42+6	2,500.00	\$4,486.80
	M-16 ET	72x42 Wedge	1,600.00	\$3,856.80
	M-16 ET	84x42 Wedge	1,600.00	\$3,982.80
	M-20 ET	72x42 Wedge	2,000.00	\$3,994.00
	M-20 ET	84x42 Wedge	2,000.00	\$4,127.00
	M-25 ET	72x42 Wedge	2,500.00	\$4,185.80
	M-25 ET	84x42 Wedge	2,500.00	\$4,407.00
	M-16 ET	72x42 + 10" Ret. Ramp	1,600.00	\$4,324.40
	M-16 ET	84x42 + 10" Ret. Ramp	1,600.00	\$4,453.20
	M-20 ET	72x42 + 10" Ret. Ramp	2,000.00	\$4,456.00
	M-20 ET	84x42 + 10" Ret. Ramp	2,000.00	\$4,587.60
	M-25 ET	72x42 + 10" Ret. Ramp	2,500.00	\$4,660.40
	M-25 ET	84x42 + 10" Ret. Ramp	2,500.00	\$4,848.00


StowAway

Tailgates By THIEMAN


Raising Performance to New Levels

MLB-SERIES

Optional 38" Deep Wedge Platform

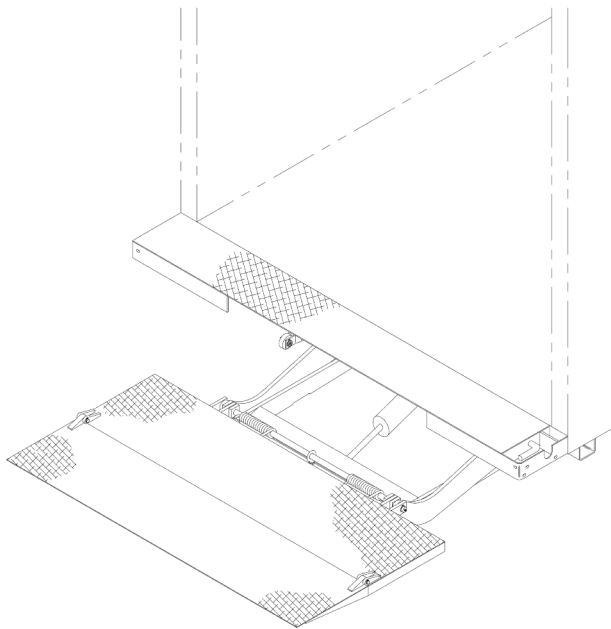

Standard 32+5" Deep Platform

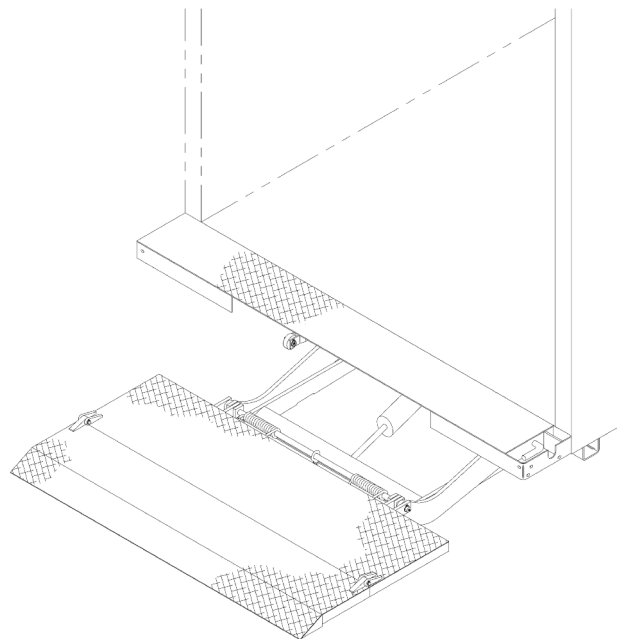

FEATURING:


- Reduced Maintenance Bushings
- Fast and Easy Installation
- 1,600 to 3,000 lb. Capacities
- Meets TMC Electrical Guidelines
- Snubber Kit
- Heavy-Duty Reinforced Spacer
- Pre-Mounted Pump and Cylinder
- Torsion Spring Assist

The THIEMAN MLB Series Stowaway is the industry standard for handling medium-duty loads on low bed height applications.

Designed for fast and easy installation, the MLB16/20/25/30 includes a pre-assembled pump and cylinder. With torsion spring assist, the operator can fold and unfold the platform with much less effort.

With its durable design and many standard features, the THIEMAN MLB Series is the choice among general purpose Stowaways.

Features, Benefits and Specifications

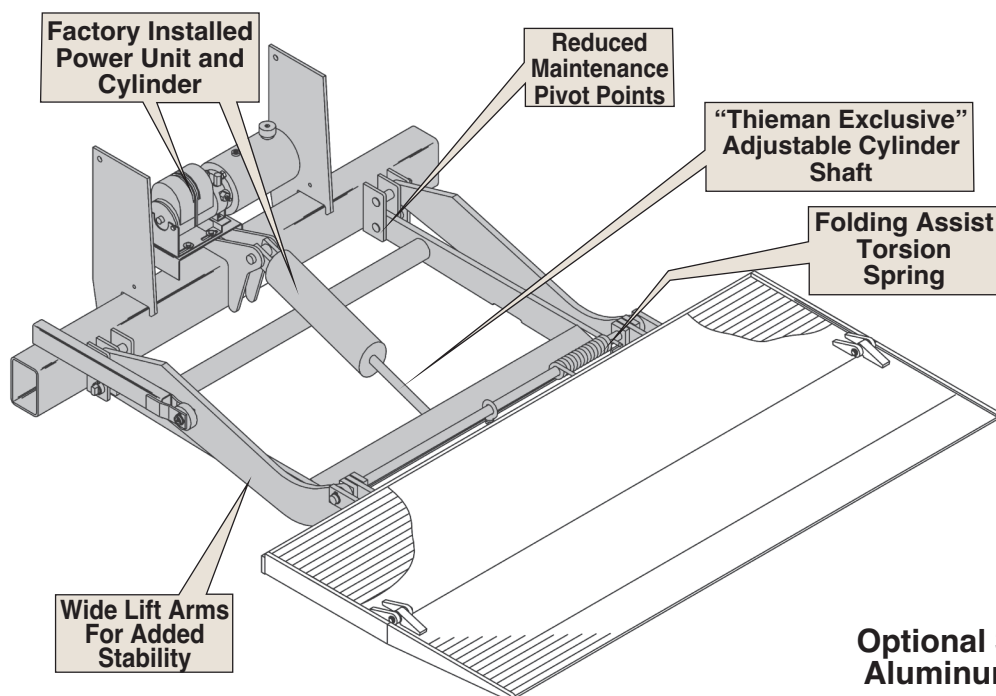

STANDARD FEATURES AND BENEFITS:

- Pre-Assembled Pump and Cylinder for Quick and Easy Installation.
- Reduced Maintenance Bushings at All Major Pivot Points.
- Molded Toggle Switch (Convenient Mounting and Environmentally Sealed)
- 150 Amp Circuit Breaker for Electrical Protection.
- Torsion Spring for Easy Platform Handling.
- Heavy-Duty Reinforced Spacer with Automatic Latch.
- Standard Snubber Kit to Prevent Wear of Liftgate While in Traveling Position.
- Meets All TMC Electrical Guidelines for Reduced Service Requirements.

AVAILABLE OPTIONS FOR MLB SERIES:

- In-Cab Shut Off Switch
- Heavy-Duty I-Beam Dock Bumpers
- Light Kits
- Power Down
- Power Unit Enclosures

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
MLB-16ET AL	72" or 84" x 27" + 6"	1600 lbs.	705 or 720 lbs.	34" to 40"
MLB-20ET AL	72" or 84" x 27" + 6"	2000 lbs.	705 or 720 lbs.	34" to 40"
MLB-25ET AL	72" or 84" x 27" + 6"	2500 lbs.	820 or 835 lbs.	34" to 40"
MLB-16ET	72" or 84" x 32" + 5"	1600 lbs.	780 or 815 lbs.	34" to 40"
MLB-20ET	72" or 84" x 32" + 5"	2000 lbs.	780 or 815 lbs.	34" to 40"
MLB-25ET	72" or 84" x 32" + 5"	2500 lbs.	895 or 930 lbs.	34" to 40"
MLB-30ET	72" or 84" x 32" + 5"	3000 lbs.	895 or 930 lbs.	34" to 40"
MLB-16ET AL	72" or 84" x 37" Wedge	1600 lbs.	688 or 703 lbs.	34" to 40"
MLB-20ET AL	72" or 84" x 37" Wedge	2000 lbs.	688 or 703 lbs.	34" to 40"
MLB-16ET	72" or 84" x 38" Wedge	1600 lbs.	800 or 818 lbs.	34" to 40"
MLB-20ET	72" or 84" x 38" Wedge	2000 lbs.	800 or 818 lbs.	34" to 40"

Application: Van Bodies, Stake Bodies, and Flatbeds
ET- Electric with Toggle Switch Control/Gravity Down
AL - Aluminum Platform

Distributed By:

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
 Celina, Ohio 45822
 Phone: 419-586-7727 or
 800-524-5210
 Fax: 419-586-9724
 www.thieman.com
 info@thiemantailgates.com



THIEMAN Reserves the right to Change Products
 Specifications at any time Without Prior Notice.
 Printed in U.S.A. Rev. 1/19 • 1M • MP98551

StowAway

Tailgates By THIEMAN

Raising Performance to New Levels

MDC-SERIES

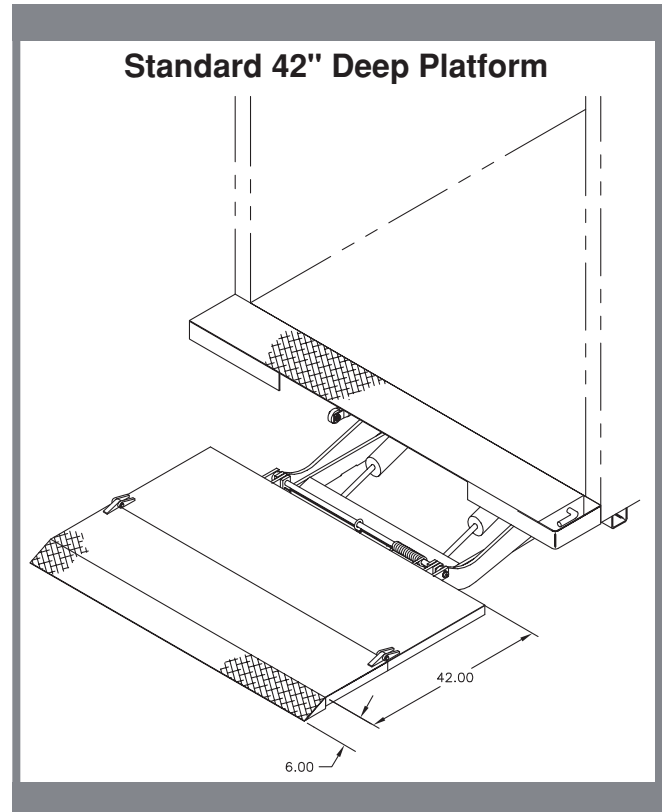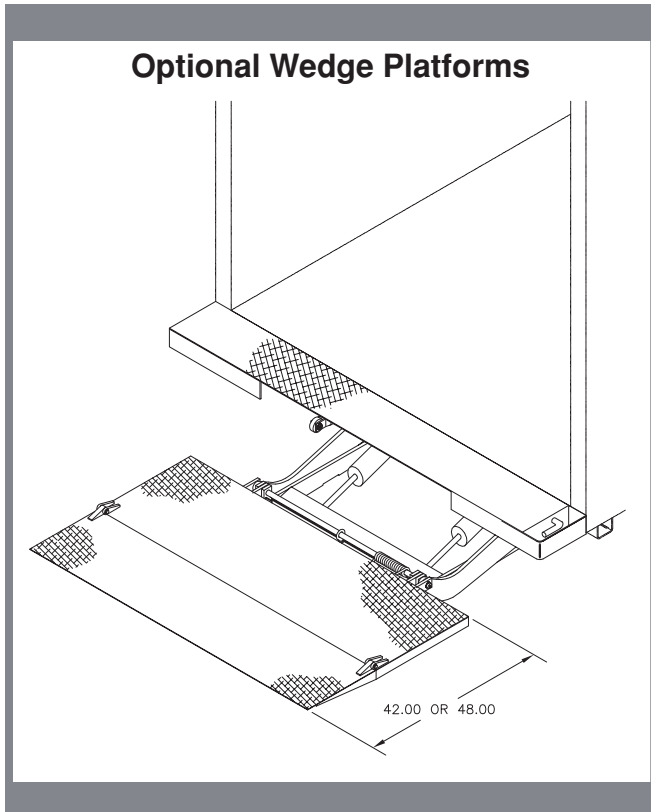

FEATURING:


- Reduced Maintenance Bushings
- Fast and Easy Installation
- 2,500 to 3,000 lb. Capacities
- Meets TMC Electrical Guidelines
- Snubber Kit
- Heavy-Duty Reinforced Spacer
- Pre-Mounted Pump and Cylinders
- Torsion Spring Assist

The THIEMAN MDC Series Stowaway is the industry standard for handling medium-duty loads.

Designed for fast and easy installation, the MDC25/30 includes a pre-assembled pump and cylinders. With the dual torsion spring assist, the operator can fold and unfold the platform with much less effort.

With its durable design and many standard features, the THIEMAN MDC Series is the choice among general purpose Stowaways.

Features, Benefits and Specifications

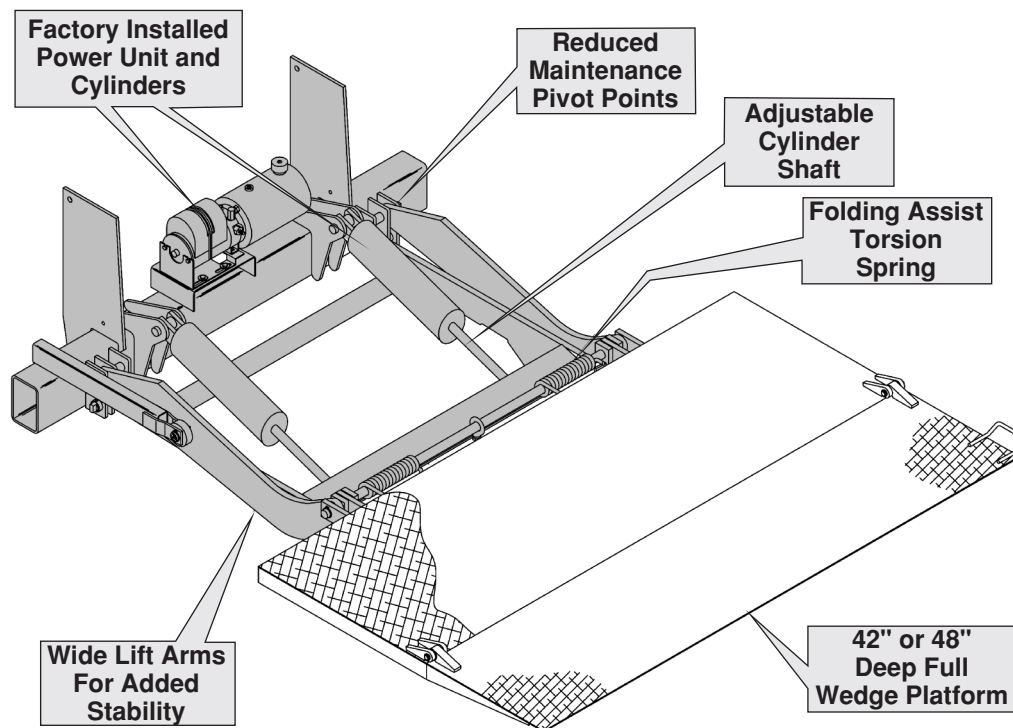

STANDARD FEATURES AND BENEFITS:

- | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Pre-Assembled Pump and Cylinders for Quick and Easy Installation. • Reduced Maintenance Bushings at All Major Pivot Points. • Molded Toggle Switch for Convenient Mounting and Protection. • 150 Amp Circuit Breaker for Electrical Protection. • Torsion Springs for Easy Platform Handling. | <ul style="list-style-type: none"> • Heavy-Duty Reinforced Spacer for Better Durability. • Standard Snubber Kit to Prevent Wear of Liftgate While in Traveling Position. • Meets All TMC Electrical Guidelines for Reduced Service Requirements. • Environmentally Sealed Toggle Switch Control for Better Dependability. |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

AVAILABLE OPTIONS FOR MDC SERIES:

- | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Remote Pendant Control • In-Cab Shut Off Switch • Push Button Control • Heavy-Duty I-Beam Dock Bumpers | <ul style="list-style-type: none"> • Light Kits • Trailer Kits • Aluminum Platform (AL) | <ul style="list-style-type: none"> • Power Down • Rubber Dock Bumpers • Power Unit Enclosures |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
MDC30ET AL	72" or 84" x 40" + 6" (Alum)	3000 lbs.	905 or 925 lbs.	42" to 54"
MDC30ET	72" or 84" x 42" + 6"	3000 lbs.	1010 or 1045 lbs.	42" to 54"
MDC30ET	72" or 84" x 42" wedge	3000 lbs.	1000 or 1040 lbs.	45" to 54"
MDC30ET	72" or 84" x 42" + 10" Ret Ramp	3000 lbs.	1070 or 1080 lbs.	38" to 54"
MDC30ET AL	72" or 84" x 42" + 10" Ret Ramp(Alum)	3000 lbs.	910 or 935 lbs.	38" to 54"
MDC25ET	72" or 84" x 48" wedge (St/Alum)	2500 lbs.	975 or 990 lbs.	45" to 54"
MDC LB 25ET	72" or 84" x 48" wedge (St/Alum)	2500 lbs.	975 or 990 lbs.	38" to 45"
MDC25ET AL	72" or 84" x 48" wedge (Alum)	2500 lbs.	885 or 905 lbs.	45" to 54"
MDC LB 25ET AL	72" or 84" x 48" wedge (Alum)	2500 lbs.	885 or 905 lbs.	38" to 45"

Application: Van Bodies, Stake Bodies, and Trailers
ET- Electric with Toggle Switch Control/Gravity Down

Distributed By:

THIEMAN
TAILGATES INC.

Raising Performance to New Levels

600 East Wayne Street
 Celina, Ohio 45822
 Phone: 419-586-7727 or
 800-524-5210
 Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

THIEMAN Reserves the right to Change Products
 Specifications at any time Without Prior Notice.
 Printed in U.S.A. Rev. 1/14 • 2M • MP80839


StowAway

Tailgates By THIEMAN


Raising Performance to New Levels

M-SERIES

Optional 42" Deep Wedge Platform

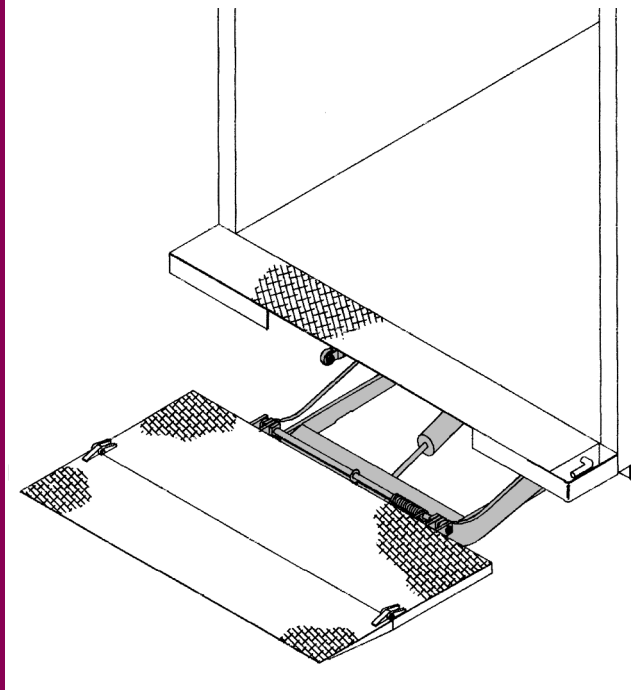

Standard 36" and
Now Available in 42" Deep Platform

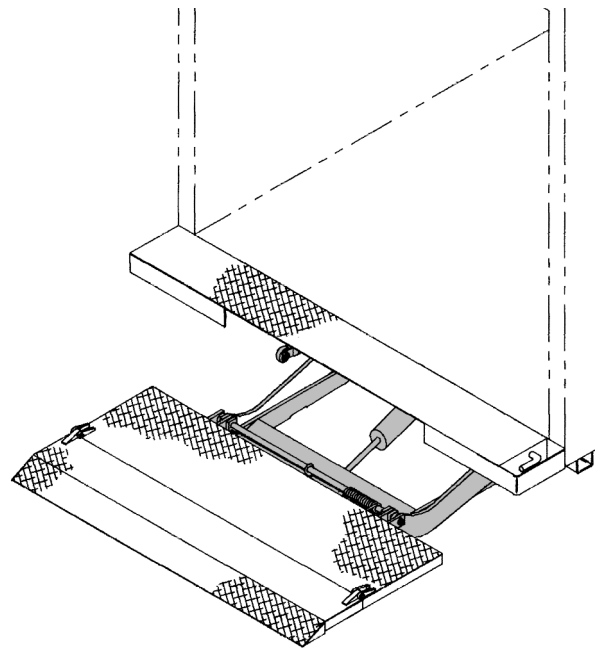

FEATURING:


- Reduced Maintenance Bushings
- Fast and Easy Installation
- 1,600 to 3,000 lb. Capacities
- Meets TMC Electrical Guidelines
- Snubber Kit
- Heavy-Duty Reinforced Spacer
- Pre-Mounted Pump and Cylinder
- Torsion Spring Assist

The THIEMAN M Series Stowaway is the industry standard for handling medium-duty loads.

Designed for fast and easy installation, the M16/20/25/30 includes a pre-assembled pump and cylinder. With the dual torsion spring assist, the operator can fold and unfold the platform with much less effort.

With its durable design and many standard features, the THIEMAN M Series is the choice among general purpose Stowaways.

Features, Benefits and Specifications

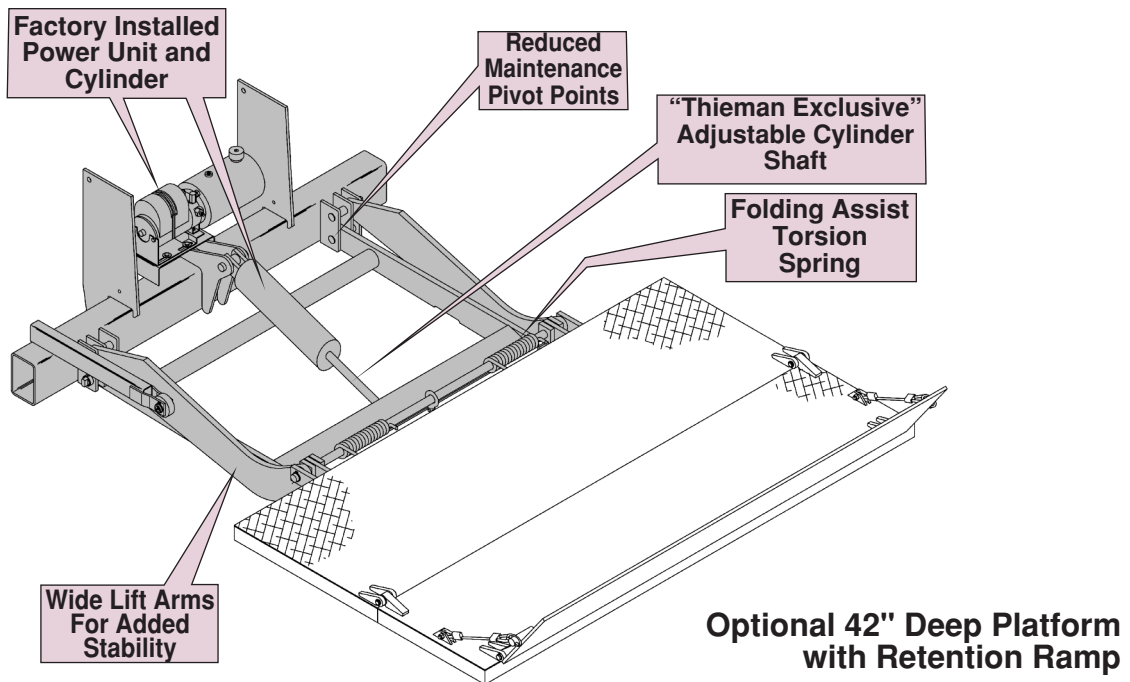

STANDARD FEATURES AND BENEFITS:

- Pre-Assembled Pump and Cylinder for Quick and Easy Installation.
- Reduced Maintenance Bushings at All Major Pivot Points.
- Molded Toggle Switch (Convenient Mounting and Environmentally Sealed)
- 150 Amp Circuit Breaker for Electrical Protection.
- Torsion Springs for Easy Platform Handling.
- Heavy-Duty Reinforced Spacer with Automatic Latch.
- Standard Snubber Kit to Prevent Wear of Liftgate While in Traveling Position.
- Meets All TMC Electrical Guidelines for Reduced Service Requirements.

AVAILABLE OPTIONS FOR M SERIES:

- Pintle Hitch Bracket
- Remote Pendant Control
- In-Cab Shut Off Switch
- Aluminum Platform (36+6, 40+6 Deep)
- Heavy-Duty I-Beam Dock Bumpers
- Light Kits
- Trailer Kits
- Power Down
- Power Unit Enclosures

Model #	Platform	Load Capacity	Approx. Install Wt.	Bed Height Range
M-16ET	72" or 84" x 36" + 6"	1600 lbs.	820 or 840 lbs.	37" to 54"
M-20ET	72" or 84" x 36" + 6"	2000 lbs.	820 or 840 lbs.	37" to 54"
M-25ET	72" or 84" x 36" + 6"	2500 lbs.	940 or 960 lbs.	38" to 54"
M-30ET	72" or 84" x 36" + 6"	3000 lbs.	940 or 960 lbs.	38" to 54"
M-16ET	72" or 84" x 42" + 6"	1600 lbs.	835 or 860 lbs.	42" to 54"
M-20ET	72" or 84" x 42" + 6"	2000 lbs.	835 or 860 lbs.	42" to 54"
M-25ET	72" or 84" x 42" + 6"	2500 lbs.	955 or 980 lbs.	42" to 54"
M-16ET	72" or 84" x 42" wedge	1600 lbs.	820 or 845 lbs.	45" to 54"
M-20ET	72" or 84" x 42" wedge	2000 lbs.	820 or 845 lbs.	45" to 54"
M-25ET	72" or 84" x 42" wedge	2500 lbs.	940 or 965 lbs.	45" to 54"
M-16ET	72" or 84" x 42" + 10" Ret Ramp	1600 lbs.	840 or 885 lbs.	37" to 54"
M-20ET	72" or 84" x 42" + 10" Ret Ramp	2000 lbs.	840 or 885 lbs.	37" to 54"
M-25ET	72" or 84" x 42" + 10" Ret Ramp	2500 lbs.	990 or 1035 lbs.	38" to 54"

Application: Van Bodies, Stake Bodies, and Trailers
ET- Electric with Toggle Switch Control/Gravity Down

Distributed By:

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
 Printed in U.S.A. Rev. 4/14 • 1M • MP81709

THIEMAN
TAILGATES INC.
Raising Performance to New Levels

600 East Wayne Street
 Celina, Ohio 45822
 Phone: 419-586-7727 or 800-524-5210
 Fax: 419-586-9724
www.thieman.com
info@thiemantailgates.com


StowAway

Tailgates By THIEMAN


Raising Performance to New Levels

Model LRST-40

Platform in Loading/Unloading Position

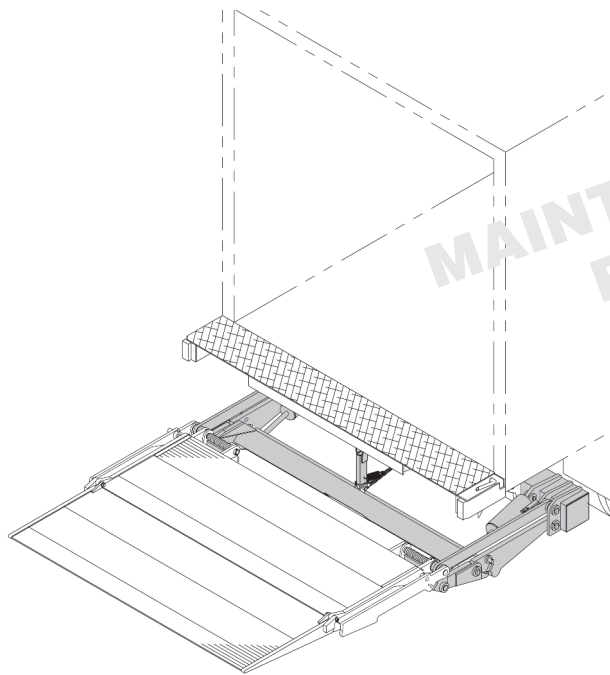

Platform in Travel Position

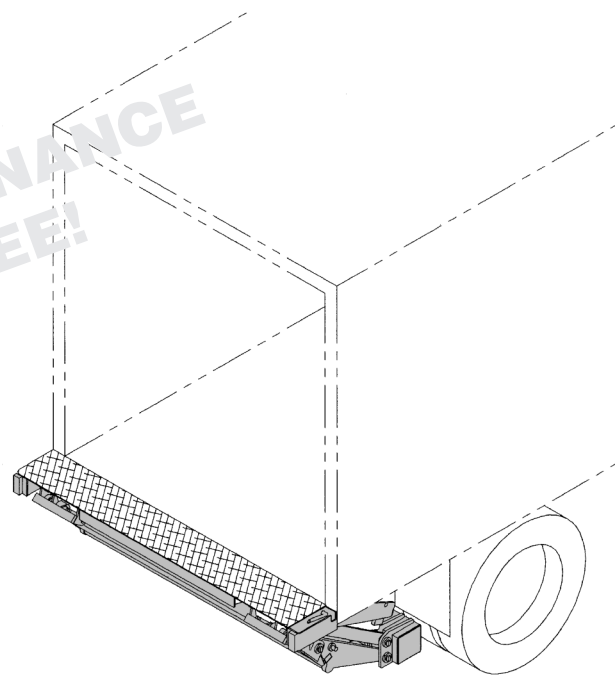

FEATURING:

- **Self-Leveling Action**
- **Large 80" x 60" Platform**
- **Heavy Duty Lift Frame**
- **4000 Lb. Lift Capacity**
- **Dual Cylinder Lift**
- **Maintenance-Free Bushings**
- **Pump Enclosure for Protection from Weather**
- **Meets TMC Electrical Guidelines**




The LRST (Level Ride Stowaway) is designed for handling loads of up to 4,000 lbs. and features a self-leveling action and an adjustable platform to provide a stable, "level with truck" surface for all types of loading conditions.

With maintenance being a major concern among fleets today, Thieman has incorporated self-lubricating Teflon bearings at all of the LRST pivot points. The LRST has a unique design so the cylinder rods are retracted during transit to protect them from road debris. The LRST also includes a standard plastic pump enclosure for protection from the weather. All of these features reduce the need for maintenance and keep your trucks and trailers on the road.

Along with a large 80" x 60" aluminum platform and self-lubricating bearings, is the industry's strongest lift frame. This makes the THIEMAN LRST the most efficient, reliable and durable Level Ride Stowaway in its class.

Features, Benefits and Specifications

Model LRST-40 Standard Features

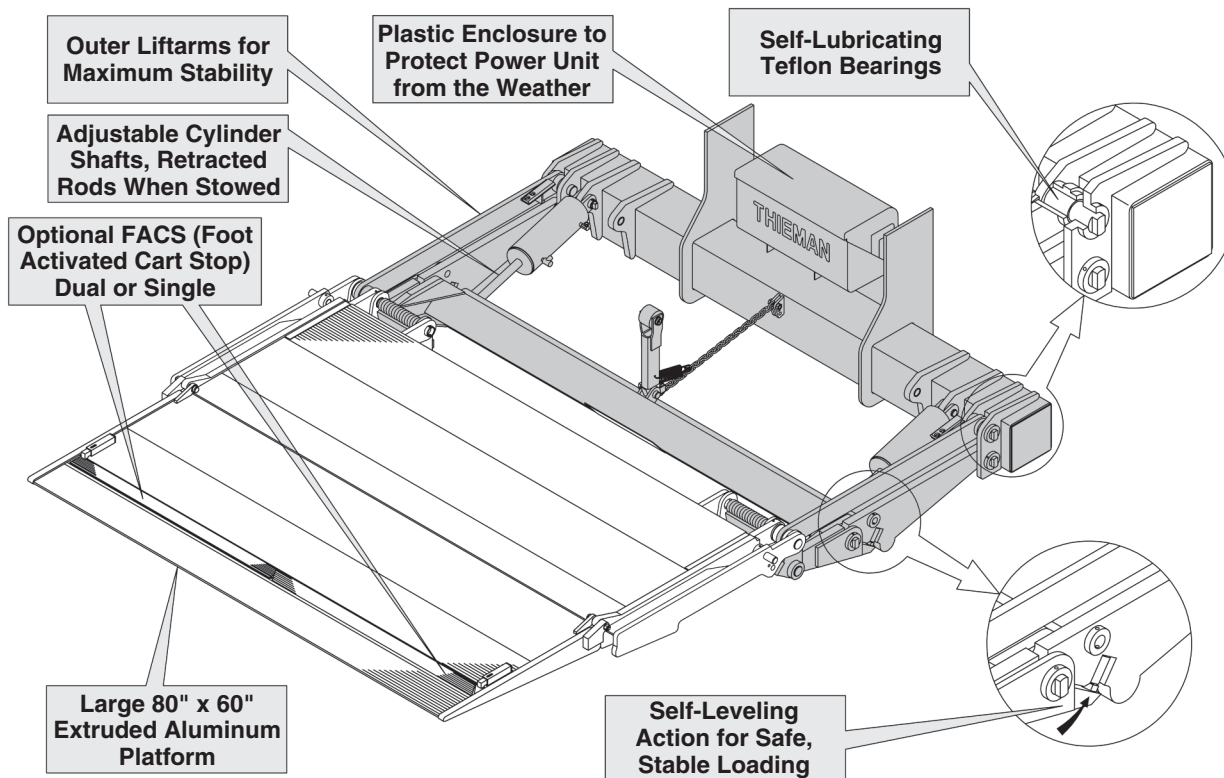

STANDARD FEATURES AND BENEFITS:

- | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Self-Leveling Action to Provide Stable, "Level with Truck" Surface for All Types of Loads. • Teflon Composite Bearings Used with Stress-Proof Pins for Virtually Maintenance-Free Operation at Pivot Points. • No Lubrication Required at Pivot Points for Less Overall Maintenance. | <ul style="list-style-type: none"> • Dual Lift Cylinders for Maximum Stability. • Adjustable Cylinder Shafts for Adjusting Platform Height. • Adjustment Bolts for Adjusting Platform Angle. • Meets All TMC Electrical Guidelines for Reduced Service Requirements. • Power Up and Power Down for Better Cold Weather Operations. | <ul style="list-style-type: none"> • Plastic Pump Enclosure for Protection from Weather. • Sealed Toggle Switch Control for Easy Weather Proof Operation. • Dual Travel Latches to Secure Lift During Road Travel. • 150 Amp Circuit Breaker for Electrical Protection. • Snubber Kit for Reduced Movement While in Travel Position. |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

AVAILABLE OPTIONS FOR LRST-40:

- | | | |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Remote Pendant Control • In-Cab Shut Off Switch • Heavy Duty I-Beam Dock Bumpers | <ul style="list-style-type: none"> • Rear Impact Guard (FMVSS 223) • Light Kits • Foot Activated Cart Stops | <ul style="list-style-type: none"> • Trailer Kits • PTO Power Source • Galvanized Undercarriage |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|

Model #	Platform	Ramp	Load Capacity	Lowering	Approx. Install Wt.	Bed Height Range
LRST 40 EST	80" X 60"	Full Taper	4000 Lbs.	Power	1450	46" to 56"
LRST 40 ESPB	80" X 60"	Full Taper	4000 Lbs.	Power	1450	46" to 56"

Application: Van Bodies, Trailers and Stake Bodies

EST-Electric w/Toggle Switch Control/Power Down *ESPB - Electric w/Push Button Control/Power Down

Distributed By:

THIEMAN
TAILGATES INC.

Raising Performance to New Levels

600 East Wayne Street
Celina, Ohio 45822
Phone: 419-586-7727 or
800-524-5210
Fax: 419-586-9724
www.thiemantailgates.com
info@thiemantailgates.com

THIEMAN Reserves the right to Change Products Specifications at any time Without Prior Notice.
Printed in U.S.A. Rev. 5/10 • 2M • MP70077