



RELIANT RS85-L

 AIR COMPRESSOR

Now 30% Lighter. Quieter Operation. More Powerful Than the Competition.

The Reliant™ RS85-L provides a whopping 85 CFM of air power at almost half the weight of its predecessor. Enough power, in fact, to operate a 90 Lb. jack hammer. The RS85-L is designed with an aluminum air end and canopy to reduce weight and to protect against rust. Its compact footprint increases deck space on your truck, and its sound attenuation design decreases noise levels for comfortable operation.

SPECIFICATIONS							
Capacity (CFM)	60	60	70	70	80	80	85
Air Pressure (PSI)	100	150	100	150	100	150	100
Compressor (RPM)	1950	1975	2275	2300	2650	2650	2850
Hydraulic Flow (GPM)*	14.0	14.2	16.5	16.8	18.5	18.8	19.7
Hydraulic Pressure (PSI)*	2500	2750	2650	2800	2800	3075	2800

Reliant™ RS85-L Unit Dimensions with fittings (In.): 38.55L X 21.0W X 24.69H | Dry Weight (Lbs.): 285 Lbs
 * Ratings are approximate and are based on 120 °F hydraulic fluid temperature. Add 400 PSI minimum to hydraulic requirements for hydraulic system continuous pressure ratings. Consult Vanair for specific details. **85 CFM @ 150 PSI systems may require additional cooling.



RELIANT[®]

RS85-L

ENCAPSULATED AIR COMPRESSOR

- Direct-Driven Aluminum Encapsulated Rotary Screw Air End
- Bolt-On Inlet Valve
- Integral Air-to-Oil Separator Tank
- Lifetime Warranty on Air End
- Made in the USA

AIR-TO-OIL COOLER

- Capable of Cooling Up to 150 PSI
- Ambient Operating Range of -20 °F to +125 °F

HYDRAULIC COOLER

- Integrated Cooler Reduces Heat in Truck Hydraulic System

HYDRAULICS

- Gear-Type Motor
- Open Center or Closed Center
- Hydraulic Oil In - 3/4" 37 Degree JIC (#12)
- Hydraulic Oil Out - 1" 37 Degree JIC (#16)
- Hydraulic Case Drain - 3/8" 37 Degree JIC (#6)
- Hydraulic Load Sense Line - 1/4" 37 Degree JIC (#4)*

INSTRUMENTAL STANDARD

- Conveniently Located and Easy to Read Temperature, Hour, and Pressure Gauges
- Relocatable

CANOPY

- Lightweight Powder-Coated Aluminum Sheet Metal Enclosure
- Single Point Lifting Bail

SAFETY EQUIPMENT

- Air Pressure Relief Safety Valve
- Open Center Hydraulic Oil Pressure Relief Valve
- Automatic Blow-Down on Shutdown
- High-Temperature and High-Pressure Shutdown
- Vented Fill Cap

SERVICEABILITY/CONVENIENCE

- Reversible Hinged Hood
- Access Panel for Easy Accessibility for Oil Changes
- JIC Fittings on Front of Machine for Hydraulic and Air Connections for Convenience




COLD WEATHER PACKAGE (OPTIONAL)

- Integrated System with Hydraulic Thermal Valve

OPTIONS/ACCESSORIES

- 20 - 60 Gallon Air Reservoirs
- Aftercoolers
- Air Hoses
- Air Tools
- Hose Reels and Fittings
- OSHA Safety Valve (Velocity Fuse)
- Service/Control Line Moisture Separators
- Tool Oiler/Lubricator
- Service Airline De-Icer
- Filter Regulator Lubricator (FRL) 1/2"
- 24V Converter

*Load sense line for closed center hydraulic system only

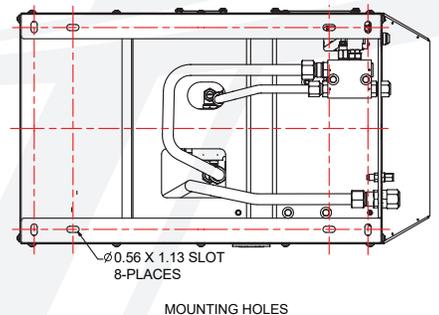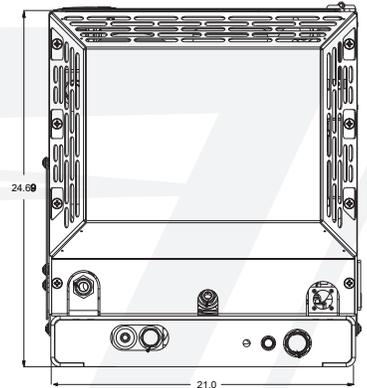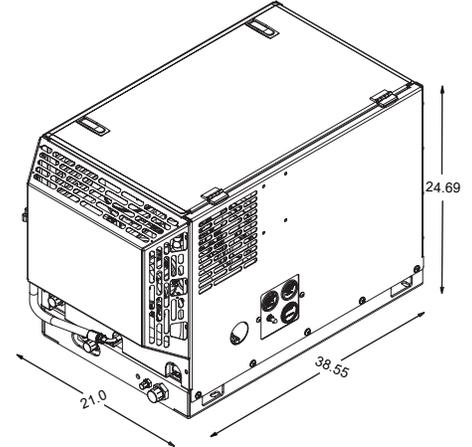

HYDRAULIC SYSTEM REQUIREMENTS

All hydraulic ratings and pressures are at the machine and do not take into account the pressure drops of individual hydraulic systems. These pressure drops need to be taken into account and added to the rating of the hydraulic pump and components. Vanair highly recommends consulting a hydraulic supply expert for specifying the correct hydraulic pump size and type, oil reservoir size, hydraulic cooler, hydraulic pressure relief, and other hydraulic supply components for your application. Please take into consideration the following: The hydraulic flow and pressure requirements of the air compressor, the continuous hydraulic load when the compressor is running, the duty cycle and ambient operating temperatures, and any other hydraulic equipment that may share the same hydraulic supply system (Vanair recommends a dedicated pump and hydraulic circuit).

Vanair reserves the right to make changes in engineering, design, and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Vanair, the Vanair logo and MOBILE POWER SOLUTIONS are registered trademarks or trademarks of Vanair Manufacturing, Inc., Michigan City, IN, USA. © 2022 All Rights Reserved.



800.526.8817 | vanair.com

10896 West 300 North | Michigan City, Indiana 46360 USA



RELIANTRS85L_04212022_NML