| MAKE | MODEL | BASE PRICE |
|------------------|-------------------------|-------------|
| BOSS PRODUCTS | 8' DRAG PRO | \$9,490.00 |
| | 8'-12' DRAG PRO | \$11,965.00 |
| | 8'-16' DRAG PRO | \$12,790.00 |
| | 8'-16' DRAG PRO 180Z | \$16,464.00 |

DRAG PRO°

BOSSPLOW.COM

TIME SAVED IS MONEY EARNED

The BOSS DRAG PRO® brings power and productivity to the back of your truck. The DRAG PRO® mounts from the rear, allowing you to pull snow from the back while clearing large areas like commercial parking lots. Expand the hydraulic folding wings up to a maximum of 16' to clear more snow with each pass—saving time and money. The down force of the plow helps the DRAG PRO® scrape more cleanly and efficiently than traditional plows, especially in wet snow. Pair with BOSS V-plows, straight-blade plows or EXT plows for the ultimate plowing rig.

B&SS Orng pro







0

Î

STANDARD FEATURES


- Hydraulic Folding Wing Models expand plow width from 8' to 12' or 8' to 16'.
- Independent Wing Control is featured on expanding wing models with hydraulic relief protection.
- Low-Profile Coupler Design allows for unobstructed tailgate use and visibility.
- Easy Attach/Detach saves time for quick operation on 4WD, ¾-ton and 1-ton trucks.
- High-Performance Hydraulic Package delivers reliability and speed.
- Hydraulic Flow Control Valve allows adjustment of the raise/ lower speed.
- Steel Blade Cutting Edge and urethane wing edges are included.
- Molded-In Urethane Snow Catchers ensure no snow is left behind when plowing.

> MODELS

8' Fixed Wing

BOSSPLOW.COM

- 8'-16' Hydraulic Folding Wing
- 8'-12' Hydraulic Folding Wing





Multiple wing configurations provide added versatility to quickly and easily clear the job site.





TIME SAVER


Make quick work of even the biggest jobs by adding a DRAG PRO® to the back of your truck.



PRODUCTIVITY BOOSTER

Make the most of every minute. The DRAG PRO® speeds up snow clearance, making every job faster and easier.



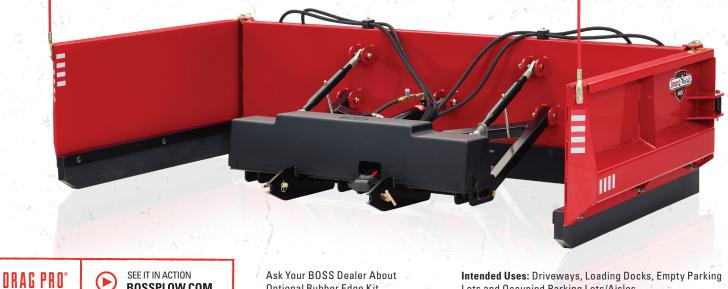

Optional Rubber Edge Kit

Intended Uses: Driveways, Loading Docks, Empty Parking Lots and Occupied Parking Lots/Aisles

PERSONAL-USE PLOWS

HTX V-BLADES AND STRAIGHT-BLA VEHICLE APPLICATION: LIGHT-DUTY, 4WD, ½- AND ¾-TON TRUCKS AND SUVS DES



| Specifications | 7'6" HTX V-Plow Steel | 7' HTX Straight Steel / Poly / Stainless | 7'6" HTX Straight Steel / Poly / Stainless |
|--|---|--|--|
| Blade Width (Straight) Curb Guard Width* | 90" (229 cm) 94.2" (239.2 cm) | 84" (213 cm) N/A | 90" (229 cm) N/A |
| Plowing Width (V Position) Curb Guard Width* | 81" (206 cm) 82.75" (210.2 cm) | N/A | N/A |
| Plowing Width (Scoop) Curb Guard Width* | 74" (188 cm) 86.75" (220.4 cm) | N/A | N/A |
| Plowing Width @ 30° Angle | 78" (198 cm) | 73" (185 cm) | 78" (198 cm) |
| Blade Height | 32" (81 cm) at end; 25" (64 cm) at center | 26" (66 cm) | 26" (66 cm) |
| Blade Thickness | 14-ga steel | 14-ga (0.19 cm) steel / ¼" (0.6 cm) poly / 14-ga (0.19 cm) stainless steel | 14-ga (0.19 cm) steel / ¼" (0.6 cm) poly / 14-ga (0.19 cm) stainless steel |
| Cutting Edge | ³∕s" x 6" (0.95 cm x 15 cm) (AR450) | ³∕s" x 6" (0.95 cm x 15 cm) | ³‰" x 6" (0.95 cm x 15 cm) |
| Reinforcement Ribs | 6 vertical, 2 diagonal | 4 vertical, 2 diagonal | 6 vertical, 2 diagonal |
| Plow Shoes | Optional | Optional | Optional |
| Trip Springs | 2 | 2 | 2 |
| SmartLock® Cylinders | 1¼" x 8¼" (3 cm x 21 cm) | N/A | N/A |
| Angle Cylinders | N/A | 1½" x 6½" (4 cm x 17 cm) | 1½" x 6½" (4 cm x 17 cm) |
| Lift Cylinder | 1¾" x 11/8" x 10" (5 cm x 3 cm x 25 cm) | 1¾" x 11/8" x 10" (5 cm x 3 cm x 25 cm) | 1¾" x 11/%" x 10" (5 cm x 3 cm x 25 cm) |
| Attachment System | SmartHitch® 2 | SmartHitch® 2 | SmartHitch® 2 |
| Plow Weight** | 490 lb ^c (222 kg) | 393 lb ^c (178 kg) / 367 lb ^c (167 kg) / 393 lb ^c (178 kg) | 440 lb ^c (200 kg) / 416 lb ^c (189 kg) / 440 lb ^c (200 kg) |
| Plow Lights | SL3 LED with Ice Shield Technology™ | SL3 LED with Ice Shield Technology™ | SL3 LED with Ice Shield Technology™ |
| D-Force® | N/A | Optional | Optional |

*Maximum product width. **Plow weight does not include vehicle mount weight. ^cVehicle mount weight range: 45-75 lb (20-34 kg).

PROFESSIONAL-USE PLOWS



DRAG PRO®

VEHICLE APPLICATION: 4WD, ¾- TO 1-TON TRUCKS

| Specifications | 8' Fixed Wing | 8'-12' Hydraulic Folding Wing | 8'-16' Hydraulic Folding Wing |
|------------------------------|---------------------------------------|--|---|
| Blade Width (Folded) | 96" (244 cm) | 96" (244 cm) | 96" (244 cm) |
| Blade Width (Extended) | N/A | 144" (366 cm) | 192" (488 cm) |
| Plow Weight* | 780 lb ^s (354 kg) | 790 lb ^s (358 kg) | 890 lb ^a (404 kg) |
| Moldboard Height | 24" (61 cm) | 24" (61 cm) | 24" (61 cm) |
| Moldboard Thickness | 11-ga steel | 11-ga steel | 11-ga steel |
| Moldboard Cutting Edge | 1/2" x 6" (1.3 cm x 15 cm) | 1⁄2" x 6" (1.3 cm x 15 cm) | ½" x 6" (1.3 cm x 15 cm) |
| Wing Cutting Edges | 1½" x 6" (4 cm x 15 cm) | 1½" x 6" (4 cm x 15 cm) | 1½" x 6" (4 cm x 15 cm) |
| Wing Cylinders | N/A | 2½" x 1½" x 5½" (6 cm x 3 cm x 13 cm) | 2% x $1%$ x $5%$ (6 cm x 3 cm x 13 cm) |
| Lift Cylinder | 2¼" x 1½" x 12" (6 cm x 3 cm x 31 cm) | 2¼" x 11½" x 12" (6 cm x 3 cm x 31 cm) | 2¼" x 11/2" x 12" (6 cm x 3 cm x 31 cm) |
| Adjustable Raise/Lower Valve | Standard | Standard | Standard |

*Plow weight does not include vehicle mount weight. ^BVehicle mount weight range: 75-105 lb (34-48 kg).