




TL-2 LIGHTNING LOADER®

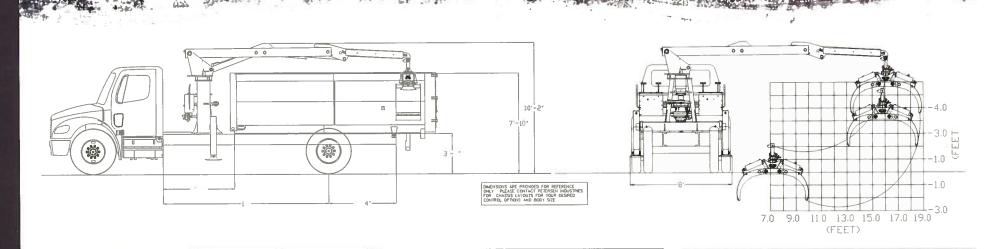

LIGHTNING LOADER® AN AMERICAN LEGEND

The Lightning Loader* is the most envied, most desired, and most imitated grapple truck in the industry. We manufacture 95% of each unit in-house to quarantee quality. Each Lightning Loader® is built to provide maximum strength, durability, and reliability, so you can get the job done fast and free of headaches.

LIFT CAPACITY

Radius	Load Capacity
10 ft. radius	5320 lbs.
16 ft. radius	2650 lbs.

Note: Weight of attachment not subtracted from listed lifting capacities. Trash bucket weighs 1,000 lbs. Capacities shown do not exceed 85% vehicle tipping moment (outriggers engaged and on firm, level ground.)

GENERAL SPECIFICATIONS

Reach	16 ft.	
Tare Weight (empty)	20,790 lbs.	
Outrigger Span	8 ft.	
Dump Body Hoist Capacity	16 tons	

RECOMMENDED CHASSIS (MINIMUM)

Body Style	Conventional Cab
Cable-to-Axle Dimension	156"
Front Axle Rating	10,000 lbs. Minimum
Rear Axle Rating	16,000 lbs. Minimum
GVW Rating	26,000 lbs. Maximum

Frame	1,800,000 w
Frame Thickness	11/32" Minimum
Engine	230 HP
Transmission	Automatic
Electrical	Remote engine and transmission connectors