



**Bobcat®**

## **Zero-Turn Mowers**

ZT7000 | ZT6100 | ZT6000 | ZS4000

WB700 | ZT3500 | ZT3000 | ZT2000



***One Tough  
Animal®***



# KICK SOME GRASS.

From personal lawns to extravagant parks, Bobcat® equipment helps you get tough jobs done. Keep crews productive and profitable or keep more time to enjoy your property. Bobcat performance, toughness and versatility make it possible.

## OWN YOUR TURF.

The comprehensive lineup of Bobcat zero-turn mowers is engineered to last longer and work harder, giving you a professional edge in an industry that's all about results.








# ENGINEERED TO KEEP YOU ON TOP OF YOUR GAME

There's a lot that goes into engineering the perfect cut – and it goes beyond just the cutting blade. It takes ingenuity, innovation and intelligence working in harmony. From deep deck designs and their unique geometries to patented baffles, airflow and vacuum-seal technologies, Bobcat zero-turn mower cutting decks deliver a quality of cut virtually no other zero-turn mower can.

## **RUGGED DURABILITY WITH THE TUFDECK™ PRO AND TUFDECK CUTTING SYSTEMS**

Tough and reliable for a perfectly manicured finish – every time:

- Steel-fabricated spindles for reliability
- Constructed with heavy-gauge, fabricated steel
- Improved vacuum lift
- Easily replaceable, bolt-on front baffles

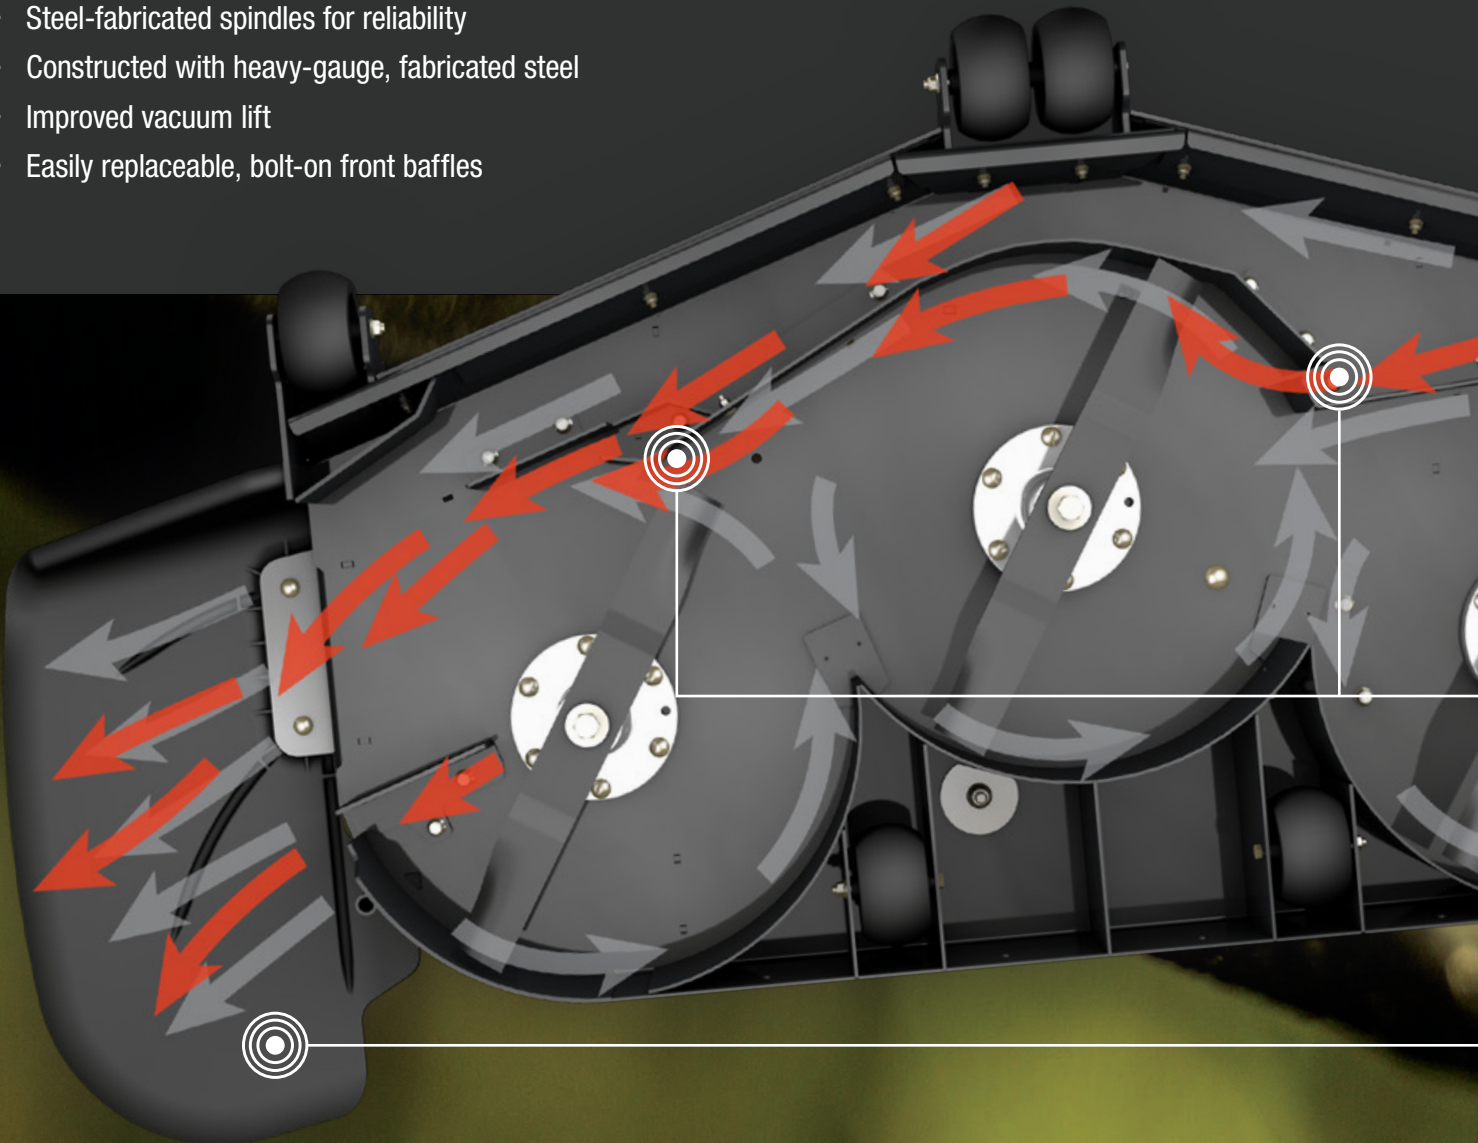



## **SUPERIOR DISCHARGE WITH DURADECK™ CUTTING SYSTEMS**

Tough enough to handle everything commercial jobs dish out:

- Double-Wave™ bolt-on baffles to increase airflow throughout the deck
- Even clipping dispersal
- Adjustable front lip for optimized cutting on varying conditions and grass types
- Steel-fabricated or cast-aluminum spindles (varies with model)

## **OPTIMAL MOWING WITH BULLNOSE AIRFX™ CUTTING SYSTEMS**

A full-scale system that eliminates negative pressure pockets and lifts grass up to the cutting blade, resulting in a precise, manicured cut that you can use to build your business.

- Deeper profile for improved vacuum lift
- Newly engineered, bolt-on, replaceable, patent-pending Air-Gap baffles for more efficient airflow and enhanced serviceability
- Bullnose design stands grass up before it reaches the mower blades
- Steel-fabricated spindles for increased durability
- Even clipping dispersal
- Improved deck cleanliness
- Adjustable front lip for optimized cutting on varying conditions and grass types



**DEEP DECK DESIGN** with patent-pending Air-Gap baffles increases airflow, delivers an exceptional quality of cut and provides a cleaner deck at the end of the day.

### **CLEAN FINISH**

Powerful airflow aggressively shoots clippings out the extra-large discharge chute.



# MEAN BUSINESS.

Built to boost your bottom line, the ZT7000 is the peak of toughness and best-in-the-business performance. With transport speeds up to 19 mph and mowing speeds up to 13 mph, you can knock out quality results, job after job.



**2000  
HOURS**

LIMITED WARRANTY

## HIGH-PERFORMANCE ENGINE

A Kawasaki® FX1000V 35.0 hp or FX1000V-EFI 38.5 hp engine delivers major commercial-grade strength – so you can get more done, more efficiently.

## COMMERCIAL-GRADE TRANSMISSION

Rugged Hydro-Gear® ZT-5400 hydrostatic transaxles provide maximum output torque and smooth, steady operation at high speeds. A two-speed foot pedal enables transport speeds of up to 19 mph.

## FRONT LED LIGHT

Sundown is no excuse to slow down. The ZT7000 includes a bright, high-intensity LED light that can show you the way to a fine finish.

## BULLNOSE AIRFX DECK

A 61- or 72-inch AirFX deck with Air-Gap baffles offers efficient airflow and superior vacuum lift while rugged, steel-fabricated spindles assure reliable performance. Its unique bullnose design stands grass up before it reaches the mower blades for an unmatched, quality cut.

## 26-INCH DIAMETER DRIVE WHEELS

Enjoy the speed, superior ride and minimal ground disturbance of new 26-inch drive wheels.

## 15-INCH NO-FLAT CASTER WHEELS

Reliable wheels reduce downtime and improve handling.

## PREMIUM OPERATOR COMFORT

An extra-high back seat with full mechanical suspension, almond-shaped handles, anti-vibration footplate and smooth, responsive controls provide intuitive and comfortable operation.

## SWING-AWAY BUMPER AND HITCH ATTACHMENT

The rotating bumper – with the additional hitch receiver included – offers fast access to internal components, making tune-ups more efficient.

## HIGH-CAPACITY DUAL FUEL TANKS

Fuel up, then fill up your schedule. Dual fuel tanks give you 15 gallons of capacity to keep you going ... and earning.

## HIGH-SPEED MOWING

Transport speeds up to 19 mph and cutting speeds up to 13 mph allow for increased productivity.





# MAKE THE CUT EVERY TIME.

Built for anyone who demands as much from their machine as they demand from themselves. The ZT6100 has the power, speed and fuel capacity you need for hours of uncompromising mowing power.



## **PREMIUM OPERATOR COMFORT**

A deluxe suspension seat, almond-shaped handles and smooth, responsive controls provide intuitive and comfortable operation.

## **SWING-AWAY BUMPER AND HITCH ATTACHMENT**

The rotating bumper – with the additional hitch receiver included – offers fast access to internal components, making tune-ups more efficient.

## **DUAL FUEL TANKS**

Armed with all-new 15-gallon capacity dual fuel tanks, the ZT6100 keeps operators at peak productivity.

**2000  
HOURS**

LIMITED WARRANTY

## **POWERFUL ENGINE PERFORMANCE**

A Kawasaki FX850V-EFI 29.5 hp engine puts professional-grade power and performance at your command for whenever the job demands it.

## **COMMERCIAL-GRADE TRANSMISSION**

Reliable, versatile and innovative, Hydro-Gear ZT-4400 transaxles shift your performance into high gear with maximum output torque and ground speeds up to 12 mph.

## **DURABLE FRAME**

Mow through tough jobs. A heavy-duty, structural tubed frame design provides maximum durability that's engineered to withstand tough surprises hidden in the turf.

## **BULLNOSE AIRFX DECK**

The deep-profile 61-inch bullnose AirFX deck is equipped with rugged, steel-fabricated spindles and patent-pending Air-Gap baffles. It delivers a premium, quality cut with innovative technology that lifts grass to the cutting blade.





# WIN A TURF WAR.

The versatility and dependability of the ZT6000 will satisfy the toughest customers and give your crew something to fight over.



## HIGH-PERFORMANCE ENGINE

The Kawasaki FX801V 25.5 hp engine delivers power and performance to tackle the toughest jobs day after day.

## COMMERCIAL-GRADE TRANSMISSION

Innovative, reliable and versatile, the Hydro-Gear ZT-4400 transaxles help you step up your game with high maximum ground speeds that get jobs done faster.

## DURABLE FRAME

Stay out on the job and out of the shop with a heavy-duty, structural tubed frame that provides maximum durability.

## BULLNOSE AIRFX DECK

The deep-profile 52- or 61-inch AirFX deck is equipped with rugged, steel-fabricated spindles and patent-pending Air-Gap baffles. Its unique bullnose design lifts grass up so steel blades can cut it down – giving you a cleaner cut and better lawn.

## PREMIUM OPERATOR COMFORT

A deluxe suspension seat, almond-shaped handles and smooth, responsive controls provide intuitive and comfortable operation.

## DUAL FUEL TANKS

Armed with all-new 15-gallon capacity dual fuel tanks.

## INCREASED PRODUCTIVITY

Ground speeds up to 12 mph.

**2000**  
HOURS

LIMITED WARRANTY



**ZS4000**  
COMMERCIAL

# CUT IT DOWN. RAKE IT IN.

Stability. Agility. Profitability. With a compact size, extra ground clearance and large drive tires, the ZS4000 gets over and around obstacles and on to the next job.



## STAND-ON OPERATOR STATION

The operator-station design and in-frame fuel tank provide excellent “center of mass” stability for agility and maneuverability – even on uneven terrain.

## OPERATOR PAD

Maintain your mower with the easily removable operator pad.

## ANTI-VIBRATION PLATFORM

The vibration-dampening platform reduces fatigue for a smooth, comfortable ride. The platform can also be flipped up for use as a walk-behind mower.

## TOOL-FREE CONTROLS

Maintain total control right at your fingertips. Take command of the job with smooth, dampened controls and tool-free, adjustable tracking.



## POWERFUL ENGINE PERFORMANCE

Efficiently power through the workday and take on jobs of all sizes with Kawasaki engine options from 19.0-26.0 hp.

## HYDRO-GEAR ZT-3100 OR ZT-3400 HYDROSTATIC TRANSMISSION

Provides all the torque you need for long hours and smooth operation.

## BULLNOSE AIRFX DECK

A heavy-duty 48-, 52- or 61-inch AirFX deck with Air-Gap baffles and bolt-on, steel-fabricated spindles\* cuts the toughest, tallest grass down to size. Its innovative technology lifts grass to the cutting blade and gives you a cleaner cut.

If you require a 36-inch cut, a 36-inch ZS4000 is also available with the tough, adjustable DuraDeck cutting system.



**2000**  
HOURS

LIMITED WARRANTY



# MAKE ANY JOB LOOK LIKE A WALK IN THE PARK.

The WB700 is a commercial, mid-size walk-behind mower with a powerful hydraulic drive that fights operator fatigue and minimizes ground disturbance. Its compact size takes up less space on your trailer and gives you more precision for mowing around obstacles and highly landscaped environments.



## HYDRAULIC DRIVE

No effort. No sweat. Power forward and reduce fatigue when handling long days on the job.

## COMPACT SIZE

Command precision maneuverability for obstacles and highly landscaped environments. It also takes up less space on an owner's trailer.

## EASY OPERATION

The ergonomic handle design and intuitive control layout keep you mowing confidently and comfortably.



**2000  
HOURS**

LIMITED WARRANTY

## HIGH-PERFORMANCE ENGINE

Commercially proven Kawasaki FS-series engines from 14.5-18.5 hp deliver reliable performance for long hours and tough jobs.

## COMMERCIAL-GRADE TRANSMISSION

The innovative Hydro-Gear ZT-2800 hydrostatic transaxles deliver smooth and simple operation with heavy-duty output torque and comfortable ground speeds of up to 6.5 mph.

## COMMERCIAL CUTTING CAPABILITY

The 36-, 48- or 52-inch TufDeck cutting system has durable, steel-fabricated spindle assemblies to handle tough mowing in tight areas.

## 20-INCH DRIVE TIRES

The large wheels provide ample ground clearance to minimize ground disturbance and enable smooth, easy maneuverability on tough terrain.



# YOUR TURF. YOUR TERMS.

We built the ZT3500 to deliver commercial-grade durability and performance at an affordable price. Convenient maintenance and all-day mowing comfort make the ZT3500 the perfect machine for anyone ready to take on the toughest turf.



## HIGH-PERFORMANCE ENGINE

Mow down any challenge with ease, thanks to a powerful Kawasaki FX series engine from 20.5-23.5 hp.

## PRO-GRADE TRANSMISSION

Rely on smooth and steady mowing power – even at top speeds – with the durable Hydro-Gear ZT-3400 hydrostatic transaxles.

## TUFDECK PRO CUTTING SYSTEM

The system features professional-grade, steel-fabricated spindle assemblies.

## 23-INCH DRIVE TIRES

Large tires offer great control and a smooth ride.

## OPTIMAL USER COMFORT

A high-backed mechanical suspension seat and ergonomic controls keep you comfortable all day long.

## DUAL FUEL TANKS

Stay focused on the turf, not on your fuel. Rugged, roto-molded dual tanks give you 7.8 gallons of fuel capacity.

## QUICK GROUND SPEEDS

Make quick work out of big jobs with a productive ground speed of 10 mph.

**1000**  
HOURS

LIMITED WARRANTY



# BUILT FOR THE TOUGHEST CUSTOMER: YOU

Pride in a job well done. That's the ZT3000 sweet spot. With top reliability and power for the job, you'll get a quality cut no matter how many acres you maintain.



## **ROBUST FUEL TANK**

Get the job done and worry less about refueling. The rugged, roto-molded and impact-resistant fuel tank has a 3.8-gallon capacity.

## **COMPLETE COMFORT**

Enjoy ergonomically engineered controls and high-backed spring suspension seat.

## **HIGH-PERFORMANCE ENGINE**

Built for the pros and those who want to mow like them, the Kawasaki FT series engine from 20.0-24.0 hp gives you dependable engine performance.

## **COMMERCIAL-GRADE TRANSMISSION**

Charge into the job with smooth operation and precise maneuverability. The Hydro-Gear ZT-3100 hydrostatic transaxles provide reliability and speed to tackle turf faster.

## **SOLID, TUBULAR FRAME**

Constructed with a lightweight, durable 1.5 x 2.5-inch steel tubed frame.

## **TOUGH MOWER DECKS**

The 48-, 52- or 61-inch TufDeck Pro cutting system features professional-grade, steel-fabricated spindles for maximum durability and high-quality results.





# THE HOUSE IS WHERE YOU SLEEP. THE YARD IS WHERE YOU LIVE.

The ZT2000 brings more commercial features than other zero-turn mowers in the same price range. It's the perfect zero-turn mower for people like you who want durability and a professional cut at an affordable price.



## ENGINE PERFORMANCE

The ZT2000 is equipped with Kawasaki FR series engine options from 21.5-23.0 hp for powerful, pro-grade performance.

## COMMERCIAL-GRADE TRANSMISSION

The innovative Hydro-Gear ZT-2800 hydrostatic transaxles deliver smooth and simple operation with heavy-duty output torque and ground speeds up to 7 mph.

## STURDY STEEL FRAME

The 1.5 x 2.5-inch steel-tubed frame is lightweight and rugged.

## COMMERCIAL CUTTING CAPABILITY

The 42-, 48- or 52-inch TufDeck cutting system has durable, steel-fabricated spindle assemblies to handle the toughest jobs.

**500  
HOURS**

LIMITED WARRANTY

## COMPLETE COMFORT

A high-backed spring suspension seat keeps you comfortable even during the longest jobs.

## ALL-DAY FUEL CAPACITY

Impact-resistant, 3.8-gallon capacity keeps you mowing.





# ZT7000

## COMMERCIAL



| MODEL NUMBER                  | 9997010   | 9997011   | 9997064   | 9997065   |
|-------------------------------|---|---|---|---|
| <b>ENGINE</b>                 |   |   |   |   |
| Model                         | Kaw FX1000V   | Kaw FX1000V   | Kaw FX1000V EFI   | Kaw FX1000V EFI   |
| Horsepower                    | 35.0 hp (26.0 kW)   | 35.0 hp (26.0 kW)   | 38.5 hp (28.7 kW)   | 38.5 hp (28.7 kW)   |
| Displacement                  | 60.9 cu. in. (999 cc)                                       | 60.9 cu. in. (999 cc)                                       | 61.0 cu. in. (999 cc)                                       | 61.0 cu. in. (999 cc)                                       |
| Fuel Capacity                 | 15.0 gal. (56.7 L)  | 15.0 gal. (56.7 L)  | 15.0 gal. (56.7 L)  | 15.0 gal. (56.7 L)  |
| Air Filter                    | Canister Air Filter   | Canister Air Filter   | Canister Air Filter   | Canister Air Filter   |
| <b>ELECTRICAL</b>             |   |   |   |   |
| Charging System               | 15 amp  | 15 amp  | 15 amp  | 15 amp  |
| Clutch                        | 250 lbf. (1112 N)   | 250 lbf. (1112 N)   | 250 lbf. (1112 N)   | 250 lbf. (1112 N)   |
| <b>DECK</b>                   |   |   |   |   |
| Mower Deck                    | AirFX Cutting System  | AirFX Cutting System  | AirFX Cutting System  | AirFX Cutting System  |
| Leading Edge                  | Adjustable, Front Lip Standard                              | Adjustable, Front Lip Standard                              | Adjustable, Front Lip Standard                              | Adjustable, Front Lip Standard                              |
| Width                         | 61.0 in. (1549 mm)  | 72.0 in. (1828 mm)  | 61.0 in. (1549 mm)  | 72.0 in. (1828 mm)  |
| Adjustable Anti-Scalp Rollers | 6   | 7   | 6   | 7   |
| Cutting Height                | 1.0-5.5 in. (25-139 mm)                                     | 1.0-5.5 in. (25-139 mm)                                     | 1.0-5.5 in. (25-139 mm)                                     | 1.0-5.5 in. (25-139 mm)                                     |
| Blade Tip Speed               | 18,500 fpm @ 3550 Engine rpm                                | 18,152 fpm @ 3550 Engine rpm                                | 18,500 fpm @ 3550 Engine rpm                                | 18,152 fpm @ 3550 Engine rpm                                |
| Discharge Chute               | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     |
| <b>FRAME</b>                  |   |   |   |   |
| Front and Rear                | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame |
| Machine Length                | 87.0 in. (2209 mm)  | 87.0 in. (2209 mm)  | 87.0 in. (2209 mm)  | 87.0 in. (2209 mm)  |
| Machine Weight (wet)          | 1500 lb. (680 kg)   | 1541 lb. (698 kg)   | 1500 lb. (680 kg)   | 1541 lb. (698 kg)   |
| <b>TRANSMISSION</b>           |   |   |   |   |
| Type                          | HG ZT-5400 2-Speed Hydrostatic Transaxles                   | HG ZT-5400 2-Speed Hydrostatic Transaxles                   | HG ZT-5400 2-Speed Hydrostatic Transaxles                   | HG ZT-5400 2-Speed Hydrostatic Transaxles                   |
| Pump Displacement             | 0.9 cu. in. (16 cc)   | 0.9 cu. in. (16 cc)   | 0.9 cu. in. (16 cc)   | 0.9 cu. in. (16 cc)   |
| Oil Capacity                  | 1.4 gal. (5.9 qt.) each                                     | 1.4 gal. (5.9 qt.) each                                     | 1.4 gal. (5.9 qt.) each                                     | 1.4 gal. (5.9 qt.) each                                     |
| Forward Speed                 | 19.0 mph (30.5 km/hr.)*                                     | 19.0 mph (30.5 km/hr.)*                                     | 19.0 mph (30.5 km/hr.)*                                     | 19.0 mph (30.5 km/hr.)*                                     |
| Reverse Speed                 | 7.5 mph (12.0 km/hr.)**                                     | 7.5 mph (12.0 km/hr.)**                                     | 7.5 mph (12.0 km/hr.)**                                     | 7.5 mph (12.0 km/hr.)**                                     |
| <b>WHEELS</b>                 |   |   |   |   |
| Drive Wheel Size              | 26 x 12-12  | 26 x 12-12  | 26 x 12-12  | 26 x 12-12  |
| Front Caster Wheel Size       | 15 x 6.5-6, No-Flat   | 15 x 6.5-6, No-Flat   | 15 x 6.5-6, No-Flat   | 15 x 6.5-6, No-Flat   |
| Caster Arm Attachment         | Bolt-On   | Bolt-On   | Bolt-On   | Bolt-On   |
| <b>SEAT</b>                   |   |   |   |   |
| Description                   | Extra-High Back, Full Mechanical Suspension Seat            | Extra-High Back, Full Mechanical Suspension Seat            | Extra-High Back, Full Mechanical Suspension Seat            | Extra-High Back, Full Mechanical Suspension Seat            |
| Fore-Aft Adjustment           | Seat Slide Lever  | Seat Slide Lever  | Seat Slide Lever  | Seat Slide Lever  |
| <b>WARRANTY</b>               |   |   |   |   |
|                               | 3-year/2,000-hour Limited Warranty                          |   |   |   |

\*0-13.0 mph cutting; 13.0-19.0 mph transport

\*\*5.0-7.5 mph transport



# ZT6100

## COMMERCIAL



| MODEL NUMBER                  | 9996013   |
|-------------------------------|---|
| ENGINE                        |   |
| Model                         | Kaw FX850V EFI  |
| Horsepower                    | 29.5 hp (22.0 kW)   |
| Displacement                  | 52.0 cu. in. (852 cc)                                       |
| Fuel Capacity                 | 15.0 gal. (56.7 L)  |
| Air Filter                    | Canister Air Filter   |
| ELECTRICAL                    |   |
| Charging System               | 15 amp  |
| Clutch                        | 225 lbf. (1000 N)   |
| DECK                          |   |
| Mower Deck                    | AirFX Cutting System  |
| Leading Edge                  | Adjustable, Front Lip Standard                              |
| Width                         | 61.0 in. (1549 mm)  |
| Adjustable Anti-Scalp Rollers | 6   |
| Cutting Height                | 1.0-5.5 in. (25-139 mm)                                     |
| Blade Tip Speed               | 18,500 fpm @ 3550 Engine rpm                                |
| Discharge Chute               | Flexible Molded Polymer                                     |
| FRAME                         |   |
| Front and Rear                | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame |
| Machine Length                | 83.0 in. (2108 mm)  |
| Machine Weight (wet)          | 1464 lb. (664 kg)   |
| TRANSMISSION                  |   |
| Type                          | HG ZT-4400 Hydrostatic Transaxles                           |
| Pump Displacement             | 0.7 cu. in. (12 cc)   |
| Oil Capacity                  | 1.1 gal. (4.4 qt.) each                                     |
| Forward Speed                 | 12.0 mph (19.3 km/hr.)                                      |
| Reverse Speed                 | 4.0 mph (6.4 km/hr.)  |
| WHEELS                        |   |
| Drive Wheel Size              | 24 x 12-12  |
| Front Caster Wheel Size       | 13 x 6.5-6  |
| Caster Arm Attachment         | Bolt-On   |
| SEAT                          |   |
| Description                   | High Back, Full Mechanical Suspension Seat                  |
| Fore-Aft Adjustment           | Seat Slide Lever  |
| WARRANTY                      |   |



# ZT6000

## COMMERCIAL



| MODEL NUMBER                  | 9996010   | 9996011   |
|-------------------------------|---|---|
| <b>ENGINE</b>                 |   |   |
| Model                         | Kaw FX801V  | Kaw FX801V  |
| Horsepower                    | 25.5 hp (19.0 kW)   | 25.5 hp (19.0 kW)   |
| Displacement                  | 52.0 cu. in. (852 cc)                                       | 52.0 cu. in. (852 cc)                                       |
| Fuel Capacity                 | 15 gal. (56.7 L)  | 15 gal. (56.7 L)  |
| Air Filter                    | Canister Air Filter   | Canister Air Filter   |
| <b>ELECTRICAL</b>             |   |   |
| Charging System               | 15 amp  | 15 amp  |
| Clutch                        | 225 lbf. (1000 N)   | 225 lbf. (1000 N)   |
| <b>DECK</b>                   |   |   |
| Mower Deck                    | AirFX Cutting System  | AirFX Cutting System  |
| Leading Edge                  | Adjustable, Front Lip Standard                              | Adjustable, Front Lip Standard                              |
| Width                         | 52.0 in. (1320 mm)  | 61.0 in. (1549 mm)  |
| Adjustable Anti-Scalp Rollers | 6   | 6   |
| Cutting Height                | 1.0-5.5 in. (25-139 mm)                                     | 1.0-5.5 in. (25-139 mm)                                     |
| Blade Tip Speed               | 18,586 fpm @ 3550 Engine rpm                                | 18,500 fpm @ 3550 Engine rpm                                |
| Discharge Chute               | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     |
| <b>FRAME</b>                  |   |   |
| Front and Rear                | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame |
| Machine Length                | 83.0 in. (2108 mm)  | 83.0 in. (2108 mm)  |
| Machine Weight (wet)          | 1371 lb. (621 kg)   | 1421 lb. (644 kg)   |
| <b>TRANSMISSION</b>           |   |   |
| Type                          | HG ZT-4400 Hydrostatic Transaxles                           | HG ZT-4400 Hydrostatic Transaxles                           |
| Pump Displacement             | 0.7 cu. in. (12 cc)   | 0.7 cu. in. (12 cc)   |
| Oil Capacity                  | 1.1 gal. (4.4 qt.) each                                     | 1.1 gal. (4.4 qt.) each                                     |
| Forward Speed                 | 12.0 mph (19.3 km/hr.)                                      | 12.0 mph (19.3 km/hr.)                                      |
| Reverse Speed                 | 4.0 mph (6.4 km/hr.)  | 4.0 mph (6.4 km/hr.)  |
| <b>WHEELS</b>                 |   |   |
| Drive Wheel Size              | 24 x 10.5-12  | 24 x 10.5-12  |
| Front Caster Wheel Size       | 13 x 6.5-6  | 13 x 6.5-6  |
| Caster Arm Attachment         | Bolt-On   | Bolt-On   |
| <b>SEAT</b>                   |   |   |
| Description                   | High Back, Full Mechanical Suspension Seat                  | High Back, Full Mechanical Suspension Seat                  |
| Fore-Aft Adjustment           | Seat Slide Lever  | Seat Slide Lever  |
| <b>WARRANTY</b>               |   |   |
|                               | 3-year/2,000-hour Limited Warranty                          |   |



# ZS4000

## COMMERCIAL



| MODEL NUMBER                  | 9994001  | 9994002  | 9994003  | 9994004  |
|-------------------------------|--|--|--|--|
| <b>ENGINE</b>                 |  |  |  |  |
| Model                         | Kaw FX600V   | Kaw FX651V   | Kaw FT730V EFI   | Kaw FT730V EFI   |
| Horsepower                    | 19.0 hp (14.1 kW)  | 20.5 hp (15.2 kW)  | 26.0 hp (19.3 kW)  | 26.0 hp (19.3 kW)  |
| Displacement                  | 36.7 cu. in. (603 cc)  | 44.3 cu. in. (726 cc)  | 44.3 cu. in. (726 cc)  | 44.3 cu. in. (726 cc)  |
| Fuel Capacity                 | 5.1 gal. (19.3 L)  | 6.5 gal. (24.6 L)  | 6.5 gal. (24.6 L)  | 6.5 gal. (24.6 L)  |
| Air Filter                    | Dual Element   | Dual Element   | Dual Element   | Dual Element   |
| <b>ELECTRICAL</b>             |  |  |  |  |
| Charging System               | 15 amp   | 15 amp   | 15 amp   | 15 amp   |
| Clutch                        | 125 lbf. (556 N)   | 200 lbf. (889 N)   | 200 lbf. (889 N)   | 200 lbf. (889 N)   |
| <b>DECK</b>                   |  |  |  |  |
| Mower Deck                    | DuraDeck Cutting System  | AirFX Cutting System   | AirFX Cutting System   | AirFX Cutting System   |
| Leading Edge                  | Adjustable, Front Lip Standard                                 | Adjustable, Front Lip Standard                                 | Adjustable, Front Lip Standard                                 | Adjustable, Front Lip Standard                                 |
| Width                         | 36.0 in. (914 mm)  | 48.0 in. (1219 mm)   | 52.0 in. (1320 mm)   | 61.0 in. (1549 mm)   |
| Adjustable Anti-Scalp Rollers | 3  | 4  | 4  | 7  |
| Cutting Height                | 1.5-4.5 in. (38-114 mm)  | 1.5-4.5 in. (38-114 mm)  | 1.5-4.5 in. (38-114 mm)  | 1.5-4.5 in. (38-114 mm)  |
| Blade Tip Speed               | 17,600 fpm @<br>3550 Engine rpm                                | 17,800 fpm @<br>3550 Engine rpm                                | 18,586 fpm @<br>3550 Engine rpm                                | 18,500 fpm @<br>3550 Engine rpm                                |
| Discharge Chute               | Flexible Molded Polymer  | Flexible Molded Polymer  | Flexible Molded Polymer  | Flexible Molded Polymer  |
| <b>FRAME</b>                  |  |  |  |  |
| Front and Rear                | 1.5- x 2.5-inch Steel Tubing;<br>Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing;<br>Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing;<br>Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing;<br>Welded Steel Reinforced Frame |
| Machine Length                | 64.0 in. (1625 mm)   | 64.0 in. (1625 mm)   | 64.0 in. (1625 mm)   | 64.0 in. (1625 mm)   |
| Machine Weight (wet)          | 800 lb. (362 kg)   | 961 lb. (435 kg)   | 991 lb. (449 kg)   | 1028 lb. (466 kg)  |
| <b>TRANSMISSION</b>           |  |  |  |  |
| Type                          | HG ZT-3100<br>Hydrostatic Transaxles                           | HG ZT-3400<br>Hydrostatic Transaxles                           | HG ZT-3400<br>Hydrostatic Transaxles                           | HG ZT-3400<br>Hydrostatic Transaxles                           |
| Pump Displacement             | 0.6 cu. in. (10 cc)  | 0.7 cu. in. (12 cc)  | 0.7 cu. in. (12 cc)  | 0.7 cu. in. (12 cc)  |
| Oil Capacity                  | 1.0 gal. (4.0 qt.)   | 1.0 gal. (4.0 qt.)   | 1.0 gal. (4.0 qt.)   | 1.0 gal. (4.0 qt.)   |
| Forward Speed                 | 9.0 mph (14.4 km/hr.)  | 10.5 mph (16.8 km/hr.)   | 10.5 mph (16.8 km/hr.)   | 10.5 mph (16.8 km/hr.)   |
| Reverse Speed                 | 3.5 mph (5.6 km/hr.)   | 3.5 mph (5.6 km/hr.)   | 3.5 mph (5.6 km/hr.)   | 3.5 mph (5.6 km/hr.)   |
| <b>WHEELS</b>                 |  |  |  |  |
| Drive Wheel Size              | 20 x 8-10  | 23 x 8.5-12  | 23 x 10.5-12   | 23 x 10.5-12   |
| Front Caster Wheel Size       | 11 x 6-5   | 13 x 6.5-6   | 13 x 6.5-6   | 13 x 6.5-6   |
| Caster Arm Attachment         | Bolt-On  | Bolt-On  | Bolt-On  | Bolt-On  |
| <b>OPERATOR PLATFORM</b>      |  |  |  |  |
| Adjustment                    | Flip Up and Latch  | Flip Up and Latch  | Flip Up and Latch  | Flip Up and Latch  |
| Rider Pad                     | Removable for Service  | Removable for Service  | Removable for Service  | Removable for Service  |
| Vibration Isolation           | Dampened   |  |  |  |
| WARRANTY                      | 3-year/2,000-hour Limited Warranty                             |  |  |  |



# WB700

## COMMERCIAL



| MODEL NUMBER                  | 9990701   | 9990702   | 9990703   |
|-------------------------------|---|---|---|
| <b>ENGINE</b>                 |   |   |   |
| Model                         | Kaw FS481V  | Kaw FS541V  | Kaw FS600V  |
| Horsepower                    | 14.5 hp (10.8 kW)   | 15.0 hp (11.1 kW)   | 18.5 hp (13.7 kW)   |
| Displacement                  | 36.8 cu. in. (603 cc)                                       | 36.8 cu. in. (603 cc)                                       | 36.8 cu. in. (603 cc)                                       |
| Fuel Capacity                 | 5.0 gal. (18.9 L)   | 5.0 gal. (18.9 L)   | 5.0 gal. (18.9 L)   |
| Air Filter                    | Dual Element  | Dual Element  | Dual Element  |
| <b>ELECTRICAL</b>             |   |   |   |
| Charging System               | 15 amp  | 15 amp  | 15 amp  |
| Clutch                        | 105 lbf. (467 N)  | 105 lbf. (467 N)  | 105 lbf. (467 N)  |
| <b>DECK</b>                   |   |   |   |
| Mower Deck                    | TufDeck Cutting System                                      | TufDeck Cutting System                                      | TufDeck Cutting System                                      |
| Width                         | 36.0 in. (914 mm)   | 48.0 in. (1219 mm)  | 52.0 in. (1320 mm)  |
| Adjustable Anti-Scalp Rollers | —   | 3   | 3   |
| Cutting Height                | 1.5-4.5 in. (38-114 mm)                                     | 1.5-4.5 in. (38-114 mm)                                     | 1.5-4.5 in. (38-114 mm)                                     |
| Blade Tip Speed               | 17,950 fpm @<br>3550 Engine rpm                             | 16,832 fpm @<br>3550 Engine rpm                             | 18,645 fpm @<br>3550 Engine rpm                             |
| Discharge Chute               | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     |
| <b>FRAME</b>                  |   |   |   |
| Front and Rear                | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame |
| Machine Length                | 78.0 in. (1981 mm)  | 78.0 in. (1981 mm)  | 78.0 in. (1981 mm)  |
| Machine Weight (wet)          | 773 lb. (350 kg)  | 789 lb. (357 kg)  | 832 lb. (377 kg)  |
| <b>TRANSMISSION</b>           |   |   |   |
| Type                          | HG ZT-2800 Hydrostatic Transaxles                           | HG ZT-2800 Hydrostatic Transaxles                           | HG ZT-2800 Hydrostatic Transaxles                           |
| Pump Displacement             | 0.7 cu. in. (10 cc)   | 0.7 cu. in. (10 cc)   | 0.7 cu. in. (10 cc)   |
| Oil Capacity                  | 1.0 gal. (4.0 qt.)  | 1.0 gal. (4.0 qt.)  | 1.0 gal. (4.0 qt.)  |
| Forward Speed                 | 6.5 mph (10.5 km/hr.)                                       | 6.5 mph (10.5 km/hr.)                                       | 6.5 mph (10.5 km/hr.)                                       |
| Reverse Speed                 | 3.0 mph (4.8 km/hr.)  | 3.0 mph (4.8 km/hr.)  | 3.0 mph (4.8 km/hr.)  |
| <b>WHEELS</b>                 |   |   |   |
| Drive Wheel Size              | 20 x 6.5  | 20 x 8  | 20 x 8  |
| Front Caster Wheel Size       | 11 x 6 Semi-pneumatic                                       | 11 x 6 Semi-pneumatic                                       | 11 x 6 Semi-pneumatic                                       |
| Caster Arm Attachment         | Welded to Frame   | Welded to Frame   | Welded to Frame   |
| <b>WARRANTY</b>               |   | 3-year/2,000-hour Limited Warranty                          |   |



# ZT3500

## ENTRY-LEVEL COMMERCIAL



| MODEL NUMBER                  | 9993501   | 9993502   | 9993503   |
|-------------------------------|---|---|---|
| <b>ENGINE</b>                 |   |   |   |
| Model                         | Kaw FX651V  | Kaw FX691V  | Kaw FX730V  |
| Horsepower                    | 20.5 hp (15.2 kW)   | 22.0 hp (16.4 kW)   | 23.5 hp (17.5 kW)   |
| Displacement                  | 44.3 cu. in. (726 cc)                                       | 44.3 cu. in. (726 cc)                                       | 44.3 cu. in. (726 cc)                                       |
| Fuel Capacity                 | 7.8 gal. (29.5 L)   | 7.8 gal. (29.5 L)   | 7.8 gal. (29.5 L)   |
| Air Filter                    | Dual-Stage Canister   | Dual-Stage Canister   | Dual-Stage Canister   |
| <b>ELECTRICAL</b>             |   |   |   |
| Charging System               | 15 amp  | 15 amp  | 15 amp  |
| Clutch                        | 125 lbf. (556 N)  | 125 lbf. (556 N)  | 125 lbf. (556 N)  |
| <b>DECK</b>                   |   |   |   |
| Mower Deck                    | TufDeck Pro Cutting System                                  | TufDeck Pro Cutting System                                  | TufDeck Pro Cutting System                                  |
| Width                         | 48.0 in. (1219 mm)  | 52.0 in. (1320 mm)  | 61.0 in. (1549 mm)  |
| Adjustable Anti-Scalp Rollers | 3   | 3   | 7   |
| Cutting Height                | 1.5-4.8 in. (38-121 mm)                                     | 1.5-4.6 in. (38-117 mm)                                     | 1.5-4.6 in. (38-117 mm)                                     |
| Blade Tip Speed               | 17,365 fpm @ 3550 Engine rpm                                | 18,142 fpm @ 3550 Engine rpm                                | 18,809 fpm @ 3550 Engine rpm                                |
| Discharge Chute               | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     |
| <b>FRAME</b>                  |   |   |   |
| Front and Rear                | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame |
| Machine Length                | 76.0 in. (1930 mm)  | 76.0 in. (1930 mm)  | 79.0 in. (2006 mm)  |
| Machine Weight                | 773 lb. (350 kg)  | 789 lb. (357 kg)  | 832 lb. (377 kg)  |
| <b>TRANSMISSION</b>           |   |   |   |
| Type                          | HG ZT-3400 Hydrostatic Transaxles                           | HG ZT-3400 Hydrostatic Transaxles                           | HG ZT-3400 Hydrostatic Transaxles                           |
| Pump Displacement             | 0.7 cu. in. (12 cc)   | 0.7 cu. in. (12 cc)   | 0.7 cu. in. (12 cc)   |
| Oil Capacity                  | 1.0 gal. (4.0 qt.)  | 1.0 gal. (4.0 qt.)  | 1.0 gal. (4.0 qt.)  |
| Forward Speed                 | 10.0 mph (16.0 km/hr.)                                      | 10.0 mph (16.0 km/hr.)                                      | 10.0 mph (16.0 km/hr.)                                      |
| Reverse Speed                 | 3.5 mph (5.6 km/hr.)  | 3.5 mph (5.6 km/hr.)  | 3.5 mph (5.6 km/hr.)  |
| <b>WHEELS</b>                 |   |   |   |
| Drive Wheel Size              | 23 x 10.5-12  | 23 x 10.5-12  | 23 x 10.5-12  |
| Front Caster Wheel Size       | 13 x 6.5-6  | 13 x 6.5-6  | 13 x 6.5-6  |
| Caster Arm Attachment         | Welded to Frame   | Welded to Frame   | Welded to Frame   |
| <b>SEAT</b>                   |   |   |   |
| Description                   | High Back, Full Mechanical Suspension Seat                  | High Back, Full Mechanical Suspension Seat                  | High Back, Full Mechanical Suspension Seat                  |
| Fore-Aft Adjustment           | Seat Slide Lever  | Seat Slide Lever  | Seat Slide Lever  |
| WARRANTY                      | 3-year/1,000-hour Limited Warranty                          |   |   |



# ZT3000

## RESIDENTIAL



| MODEL NUMBER                  | 9993001   | 9993002   | 9993003   |
|-------------------------------|---|---|---|
| <b>ENGINE</b>                 |   |   |   |
| Model                         | Kaw FT651V  | Kaw FT691V  | Kaw FT730V  |
| Horsepower                    | 20.0 hp (14.9 kW)   | 22.0 hp (16.4 kW)   | 24.0 hp (17.8 kW)   |
| Displacement                  | 44.3 cu. in. (726 cc)                                       | 44.3 cu. in. (726 cc)                                       | 44.3 cu. in. (726 cc)                                       |
| Fuel Capacity                 | 3.8 gal. (14.3 L)   | 3.8 gal. (14.3 L)   | 3.8 gal. (14.3 L)   |
| Air Filter                    | Dual Element  | Dual Element  | Dual Element  |
| <b>ELECTRICAL</b>             |   |   |   |
| Charging System               | 15 amp  | 15 amp  | 15 amp  |
| Clutch                        | 125 lbf. (556 N)  | 125 lbf. (556 N)  | 125 lbf. (556 N)  |
| <b>DECK</b>                   |   |   |   |
| Mower Deck                    | TufDeck Pro Cutting System                                  | TufDeck Pro Cutting System                                  | TufDeck Pro Cutting System                                  |
| Width                         | 48.0 in. (1219 mm)  | 52.0 in. (1320 mm)  | 61.0 in. (1549 mm)  |
| Adjustable Anti-Scalp Rollers | 3   | 3   | 7   |
| Cutting Height                | 1.5-4.8 in. (38-121 mm)                                     | 1.5-4.8 in. (38-121 mm)                                     | 1.5-4.8 in. (38-121 mm)                                     |
| Blade Tip Speed               | 17,365 fpm @ 3550 Engine rpm                                | 18,142 fpm @ 3550 Engine rpm                                | 18,809 fpm @ 3550 Engine rpm                                |
| Discharge Chute               | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     |
| <b>FRAME</b>                  |   |   |   |
| Front and Rear                | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame |
| Machine Length                | 76.0 in. (1930 mm)  | 76.0 in. (1930 mm)  | 76.0 in. (1930 mm)  |
| Machine Weight (wet)          | 758 lb. (343 kg)  | 774 lb. (351 kg)  | 817 lb. (370 kg)  |
| <b>TRANSMISSION</b>           |   |   |   |
| Type                          | HG ZT-3100 Hydrostatic Transaxles                           | HG ZT-3100 Hydrostatic Transaxles                           | HG ZT-3100 Hydrostatic Transaxles                           |
| Pump Displacement             | 0.6 cu. in. (10 cc)   | 0.6 cu. in. (10 cc)   | 0.6 cu. in. (10 cc)   |
| Oil Capacity                  | 1.0 gal. (4.0 qt.)  | 1.0 gal. (4.0 qt.)  | 1.0 gal. (4.0 qt.)  |
| Forward Speed                 | 8.0 mph (12.8 km/hr.)                                       | 8.0 mph (12.8 km/hr.)                                       | 8.0 mph (12.8 km/hr.)                                       |
| Reverse Speed                 | 3.5 mph (5.6 km/hr.)  | 3.5 mph (5.6 km/hr.)  | 3.5 mph (5.6 km/hr.)  |
| <b>WHEELS</b>                 |   |   |   |
| Drive Wheel Size              | 22 x 11-10  | 22 x 11-10  | 22 x 11-10  |
| Front Caster Wheel Size       | 13 x 6.5-6  | 13 x 6.5-6  | 13 x 6.5-6  |
| Caster Arm Attachment         | Welded to Frame   | Welded to Frame   | Welded to Frame   |
| <b>SEAT</b>                   |   |   |   |
| Description                   | High-Back, EVC and Spring Suspension Seat                   | High-Back, EVC and Spring Suspension Seat                   | High-Back, EVC and Spring Suspension Seat                   |
| Fore-Aft Adjustment           | Seat Slide Lever  | Seat Slide Lever  | Seat Slide Lever  |
| WARRANTY                      | 3-year/1,000-hour Limited Warranty                          |   |   |



# ZT2000

## RESIDENTIAL



| MODEL NUMBER                  | 9992001   | 9992002   | 9992003   |
|-------------------------------|---|---|---|
| <b>ENGINE</b>                 |   |   |   |
| Model                         | Kaw FR651V  | Kaw FR651V  | Kaw FR691V  |
| Horsepower                    | 21.5 hp (16.0 kW)   | 21.5 hp (16.0 kW)   | 23.0 hp (17.1 kW)   |
| Displacement                  | 44.3 cu. in. (726 cc)                                       | 44.3 cu. in. (726 cc)                                       | 44.3 cu. in. (726 cc)                                       |
| Fuel Capacity                 | 3.8 gal. (14.3 L)   | 3.8 gal. (14.3 L)   | 3.8 gal. (14.3 L)   |
| Air Filter                    | Dual Element  | Dual Element  | Dual Element  |
| <b>ELECTRICAL</b>             |   |   |   |
| Charging System               | 15 amp  | 15 amp  | 15 amp  |
| Clutch                        | 105 lb. (556 N)   | 105 lb. (556 N)   | 105 lb. (556 N)   |
| <b>DECK</b>                   |   |   |   |
| Mower Deck                    | TufDeck Cutting System                                      | TufDeck Cutting System                                      | TufDeck Cutting System                                      |
| Width                         | 42.0 in. (1066 mm)  | 48.0 in. (1219 mm)  | 52.0 in. (1320 mm)  |
| Adjustable Anti-Scalp Rollers | 2   | 3   | 3   |
| Cutting Height                | 1.5-4.6 in. (38-117 mm)                                     | 1.5-4.6 in. (38-117 mm)                                     | 1.5-4.6 in. (38-117 mm)                                     |
| Blade Tip Speed               | 18,809 fpm @ 3550 Engine rpm                                | 17,365 fpm @ 3550 Engine rpm                                | 18,142 fpm @ 3550 Engine rpm                                |
| Discharge Chute               | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     | Flexible Molded Polymer                                     |
| <b>FRAME</b>                  |   |   |   |
| Front and Rear                | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame |
| Machine Length                | 76.0 in. (1930 mm)  | 76.0 in. (1930 mm)  | 76.0 in. (1930 mm)  |
| Machine Weight (wet)          | 684 lb. (310 kg)  | 736 lb. (333 kg)  | 752 lb. (341 kg)  |
| <b>TRANSMISSION</b>           |   |   |   |
| Type                          | HG ZT-2800 Hydrostatic Transaxles                           | HG ZT-2800 Hydrostatic Transaxles                           | HG ZT-2800 Hydrostatic Transaxles                           |
| Pump Displacement             | 0.6 cu. in. (10 cc)   | 0.6 cu. in. (10 cc)   | 0.6 cu. in. (10 cc)   |
| Oil Capacity                  | 1.0 gal. (4.0 qt.)  | 1.0 gal. (4.0 qt.)  | 1.0 gal. (4.0 qt.)  |
| Forward Speed                 | 7.0 mph (11.2 km/hr.)                                       | 7.0 mph (11.2 km/hr.)                                       | 7.0 mph (11.2 km/hr.)                                       |
| Reverse Speed                 | 3.0 mph (4.8 km/hr.)  | 3.0 mph (4.8 km/hr.)  | 3.0 mph (4.8 km/hr.)  |
| <b>WHEELS</b>                 |   |   |   |
| Drive Wheel Size              | 20 x 8-10   | 20 x 10-10  | 20 x 10-10  |
| Front Caster Wheel Size       | 11 x 6-5  | 11 x 6-5  | 11 x 6-5  |
| Caster Arm Attachment         | Welded to Frame   | Welded to Frame   | Welded to Frame   |
| <b>SEAT</b>                   |   |   |   |
| Description                   | High Back, Spring Suspension Seat                           | High Back, Spring Suspension Seat                           | High Back, Spring Suspension Seat                           |
| Fore-Aft Adjustment           | Seat Slide Lever  | Seat Slide Lever  | Seat Slide Lever  |
| <b>WARRANTY</b>               |   | 3-year/500-hour Limited Warranty                            |   |



# THE BEST WARRANTY FOR YOUR BUSINESS

You rely on your mowers – whether it's to get work done fast or generate business income. Either way, when you buy a Bobcat zero-turn mower, you get an industry-leading warranty that covers your investment – up to 2,000 hours.

## PROTECTION PLUS® EXTENDED WARRANTY

Get more warranty for more peace of mind. Pick the plan that's right for you with extended warranty options up to 60 months and 2,500 hours.

| MODEL  | STANDARD WARRANTY |       | EXTENDED WARRANTY |       |        |       |
|--------|-------------------|-------|-------------------|-------|--------|-------|
|        | MONTHS            | HOURS | MONTHS            | HOURS | MONTHS | HOURS |
| ZT7000 | 36                | 2,000 | 48                | 2,250 | 60     | 2,500 |
| ZT6100 | 36                | 2,000 | 48                | 2,250 | 60     | 2,500 |
| ZT6000 | 36                | 2,000 | 48                | 2,250 | 60     | 2,500 |
| ZS4000 | 36                | 2,000 | 48                | 2,250 | 60     | 2,500 |
| WB700  | 36                | 2,000 | 48                | 2,250 | 60     | 2,500 |
| ZT3500 | 36                | 1,000 | 48                | 1,100 | 60     | 1,200 |
| ZT3000 | 36                | 1,000 | –                 | –     | –      | –     |
| ZT2000 | 36                | 500   | –                 | –     | –      | –     |



## PARTS AND ACCESSORIES

Shop by Bobcat model to get the parts and accessories you need.

|   | ZT7000 | ZT6100 | ZT6000 | ZS4000                 | WB700 | ZT3500         | ZT3000 | ZT2000         |
|---|--------|--------|--------|------------------------|-------|----------------|--------|----------------|
| Mulch Kit                                   | 61 in. | Std    | Std    | Std                    | Std   | Std            | Std    | Std            |
| ECO Plate                                   | Std    | Std    | Std    | Std                    | Std   | Std            | Std    | Std            |
| Grass Catcher: Poly-Dump, 3.75- or 5-Bushel | 61 in. | Std    | Std    | Std                    | Std   | Std            | Std    | Std            |
| Weight Kit                                  | –      | –      | –      | Std                    | –     | –              | –      | –              |
| Seat Suspension Kit                         | –      | –      | –      | –                      | –     | –              | Std    | Std            |
| BOSS-Vac Pro 12-Bushel Collection System    | 61 in. | Std    | Std    | –                      | –     | –              | –      | –              |
| BOSS-Vac 8-Bushel Collection System         | –      | –      | –      | –                      | –     | 52 in., 61 in. | –      | –              |
| Deck Striping Kit                           | Std    | Std    | Std    | 48 in., 52 in., 61 in. | –     | Std            | Std    | 48 in., 52 in. |
| ZT Hitch Kit                                | –      | –      | Std    | –                      | –     | Std            | Std    | Std            |
| No-Flat Caster Wheel Options                | –      | Std    | Std    | Std                    | –     | Std            | Std    | Std            |
| Magnetic Light Kit, 12V                     | Std    | Std    | Std    | Std                    | –     | Std            | Std    | Std            |
| Light Kit, Footplate                        | –      | Std    | Std    | –                      | –     | –              | –      | –              |
| ROPS Kit                                    | –      | –      | –      | –                      | –     | –              | Std    | Std            |
| ROPS Canopy Kit                             | Std    | Std    | Std    | –                      | –     | Std            | Std*   | Std*           |


\*ROPS kit required





# One Tough Animal®

## B O B C A T T I M E L I N E

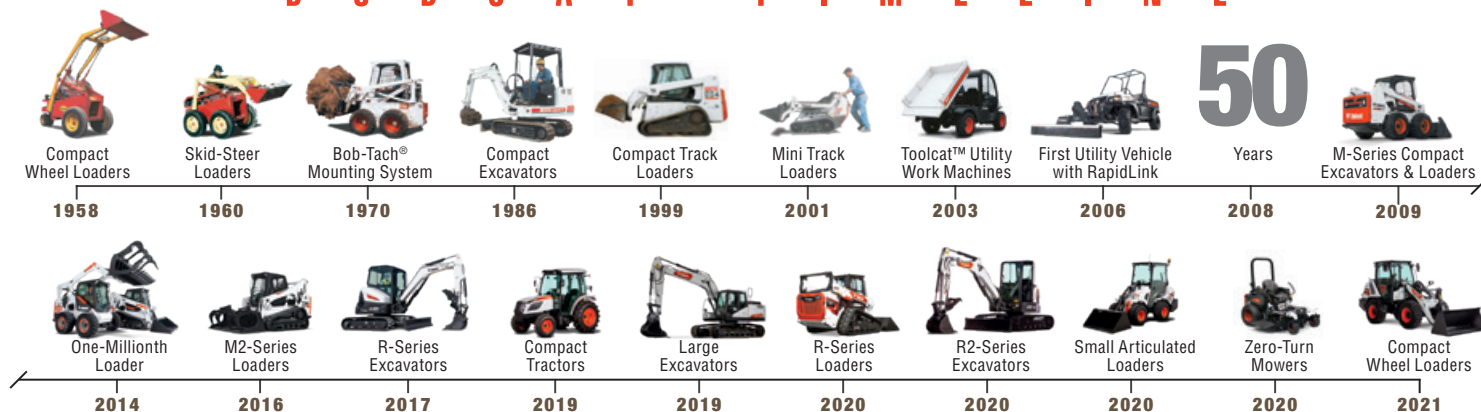





# YOU ARE ONE TOUGH ANIMAL.®

Everything we put into Bobcat equipment is designed to make more of whatever you bring to the job. Whether it's strength, versatility, speed or agility, it's built around you.

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.

**DOOSAN**

**Bobcat Company is a member of the Doosan Group.** Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat® and the Bobcat logo are registered trademarks of Bobcat Company in the United States and various other countries. ©2022 Bobcat Company. All rights reserved.



**B-3000** (07/22)  
EP-15M-0722-85579-F

**Bobcat Company**  
250 East Beaton Drive • West Fargo, ND 58078

**Bobcat.com**



**Bobcat®**

***One Tough Animal***