

FORD MECHANICS TRUCKS

KNAPHEIDE MECHANICS TRUCKS

Knapheide Mechanics Trucks come equipped with standard features to help you get the job done. With secure side compartments and an oversized cargo space, you can carry everything you need.

Choose a Knapheide Mechanics Truck for the durability and functionality that stands above the rest.



Knapheide KMT1 Mechanics Trucks are compatible with Class 5 trucks and built for crane load capacities of up to 8,600 lb. Count on our KMT2 and KMT3 trucks for the most demanding lifting applications. These are compatible with Class 6-8 trucks.


KMS16 & KMS30 MODELS

Knapheide KMS16 trucks are equipped with an electric crane, while KMS30 trucks have the option of either an electric or hydraulic crane for lifting applications. Both are compatible with Class 3–5 trucks.

POPULAR VOCATIONS



HEAVY CONSTRUCTION AGRICULTURE

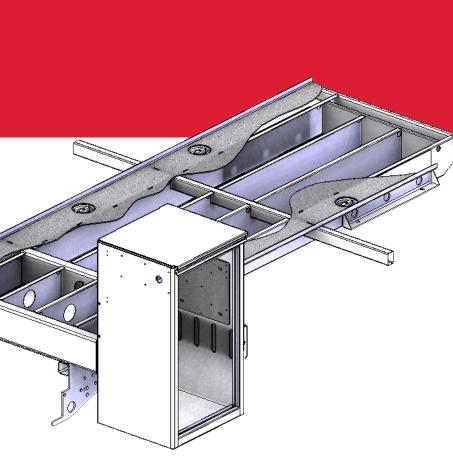

KMT1, KMT2 & KMT3/KMS30 CRANE BODY UNDERSTRUCTURE

Unique torq-isolator crane support system transfers lift forces into the full length torsion box subframe and outriggers, and not the side compartments.

Reinforced rear vertical curb side compartment is independent of all other side compartments, eliminating flexing and twisting of side packs.





OIL/MINING/GAS

S R 4 **M** Σ

A. DOUBLE PANELED DOORS

made of 20-gauge galvanneal steel are reinforced with internal braces for durability

B. 3-POINT T-HANDLE LATCHES ensure your compartment doors stay closed and are individually lockable

C. MASTER LOCKING SYSTEM locks down all compartments on one side with one motion

D. KNAPLINER BUMPER provides work surface with lockable through compartment, a vise plate, and two grip strut flex steps

E. HEAVY DUTY ALUMINUM GRAB HANDLES installed on both sides at rear of the body for easy cargo area access

F. INTEGRATED LED S/T/T AND B/U, LED STROBES

with (8) selectable patterns and builtin reflectivity mounted to external rear light boxes made of UV-resistant ABS material

G. 16" HIGH DOUBLE PANEL SLAM TAILGATE

with center latch and flat space for displaying company graphics

H. CAB PROTECTOR welded-on with fully punched window for visibility

I. (4) LED 3000 LUMEN WORK LIGHTS installed (2 at front, 2 at rear) for

low-light working conditions

J. HYDRAULIC OUTRIGGERS

out-and-down curb side and hydraulic down street side for crane stability during lifting operations

K. 55,000 FT-LB. CRANE

with 21' hydraulic reach, provided by a two-stage hydraulic extension (KMT1)

66,000 FT-LB. CRANE with 21' hydraulic reach, provided by a two-stage hydraulic extension (KMT2)

70,000 FT-LB. CRANE with 30' hydraulic reach, provided by a two-stage hydraulic extension (KMT3)

L. RECIPROCATING HYDRAULIC COMPRESSOR up to 40 CFM (KMT1)

ROTARY SCREW HYDRAULIC COMPRESSOR

35 CFM on 11' models 60 CFM on 14' models

M. PLANETARY WINCH

provides a 60 ft. per minute single line speed

N. KNAPLINER

applied to cargo area floor, sides, compartment tops, bulkhead, bumper and tailgate for durability

FEATURES NOT SHOWN

SMALL PART STORAGE CONTAINERS in horizontal compartment on

street side

ALUMINUM MECHANIC 7-DRAWER SET Extreme duty aluminum mechanic 7-drawer set on street side

MULTI-FUNCTION RADIO REMOTE CONTROL provides convenient complete

control of the crane

ELECTRODEPOSITION PRIME-PAINT SYSTEM provides superior corrosion resistance (6) D-RING CARGO TIE DOWNS each D-ring provides a 2000 lb working load capacity

3/16" TREAD PLATE FLOOR provides traction for safety

12-GAUGE GALVANNEAL STEEL Compartment bottoms and end panels KNAPHEIDE'S WATER-BASED UNDERCOAT Bodies are fully protected with Knapheide's water-based undercoat



Ο

 \bigcirc

A

E

B

S

ш







DOUBLE-SPRING OVER-CENTER RETAINER

on vertical compartment doors eliminate involuntary swing



NEOPRENE DOOR SEALS protect compartments from the weather



ADJUSTABLE DIVIDER SHELVES 250-lb. capacity



CONTINUOUS STAINLESS STEEL HINGES are pry-proof and corrosion-resistant

CRANE COMPARTMENT



50' X 1/2" COMPRESSOR HOSE REEL AND ROLLER FAIRLEAD through curb side vertical compartment



POLYETHYLENE FORMED DRIP PAN WITH DRAIN HOSE placed under the crane manages water intrusion through the crane pedestal



KNAPHEIDE CONTROLLER

power cell, controller and 8-button switch panel located in the rear crane compartment. CAN bus system with continuous working load of 115 amps features built-in overload current protection for system and operator system A. CRANE COMPARTMENT KMS16: crane reinforcement kit (CRK) KMS30 - isolated crane pedestal

B. DOUBLE PANELED DOORS made of galvanneal steel are reinforced with internal braces for durability

C. 3-POINT T-HANDLE LATCHES ensure your compartment doors stay closed and are individually lockable

D. MASTER LOCKING SYSTEM locks down all compartments on one side with one motion

E. KNAPLINER BUMPER provides versatile work space on a flat surface

F. INTEGRATED LED S/T/T AND B/U, LED STROBES with (8) selectable patterns and builtin reflectivity mounted to external rear light boxes made of UV-resistant ABS material

G. DOUBLE PANEL SLAM TAILGATE

with center latch and flat space for displaying company graphics

H. CAB PROTECTOR welded-on with fully punched window for visibility

I. (4) LED 3000 LUMEN WORK LIGHTS installed for low-light working conditions

J. HEAVY DUTY ALUMINUM GRAB HANDLES installed on both sides at rear of the body for easy cargo area access **K. (1) MANUAL OUTRIGGER** for crane stability during lifting operations

L. UP TO 16,000 FT-LB. CRANE

with 20' reach (KMS16) **UP TO 30,000 FT-LB CRANE** with 21' reach (KMS30)

M. PLANETARY WINCH provides a 15 ft. per minute single line speed

N. KNAPLINER applied to cargo area floor, sides, compartment tops, bulkhead, bumper and tailgate for durability

G

B

6 0

Ζ

ш

Σ

 \vdash

R

₹ ₽

Σ

Ο

 \bigcirc

S

FEATURES NOT SHOWN

SMALL PART STORAGE CONTAINERS in second horizontal compartment on street side

ALUMINUM MECHANIC 6-DRAWER SET Extreme duty aluminum mechanic 6-drawer set on street side

D-RING CARGO TIE DOWNS each D ring provides a 2000 lb working load capacity (4 in 9' and 6 in 11') KNAPHEIDE'S WATER-BASED UNDERCOAT Bodies are fully protected with

Knapheide's water-based undercoat
ELECTRODEPOSITION
PRIME-PAINT SYSTEM

provides superior corrosion resistance **TORSION BOX SUBFRAME** Full- length 1/18" TREAD PLATE FLOOR provides traction for safety

14-GAUGE GALVANNEAL STEEL Compartment bottoms, floors and end panels



S

ш

Ŷ

ш

M

S

Σ

 \mathbf{Y}



DOUBLE-SPRING OVER-CENTER RETAINER on vertical compartment doors eliminate involuntary swing



NEOPRENE DOOR SEALS protect compartments from the weather



ADJUSTABLE DIVIDER SHELVES 250-lb. capacity



CONTINUOUS STAINLESS STEEL HINGES are pry-proof and corrosion-resistant




POLYETHYLENE FORMED DRIP PAN WITH DRAIN HOSE placed under the crane manages water intrusion through the crane pedestal

CRANE COMPARTMENT

KMS16 OFFERS A: CRANE REINFORCEMENT KIT

allows you to incorporate a crane up to 4,000 lb. capacity (16,000 ft-lb. max.) onto the rear curb side corner of your body as shown on KMS16.

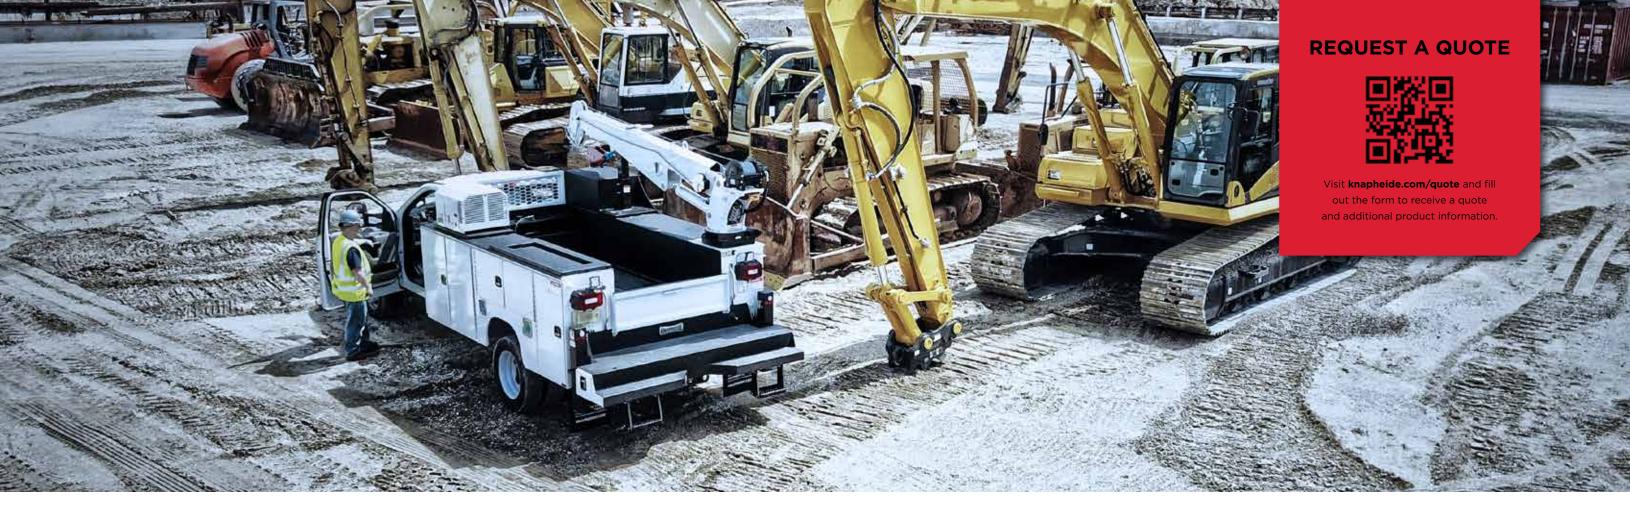

POPULAR OPTIONS

3		
	HEAR	





AUXILIARY LIGHTING



WELDER

4x BUTTON

ADDITIONAL MECHANIC DRAWERS

KEYPAD



LED COMPARTMENT LIGHTS



STEEL MECHANIC DRAWERS







MODEL	GVWR MIN./RANGE	MAXIMUM CRANE	BUMPER	BODY LENGTH	COMPARTMENT HEIGHT	COMPARTMENT DEPTH	CARGO AREA WIDTH	REAR HITCH
KMS16-9	13,300-19,500	16,000 ft-lb.	21" with outrigger tube	9'	44", 60" raised front option	22"	50"	2.5" receiver tube below bumper
KMS16-11	13,300-19,500	16,000 ft-lb.	21" with outrigger tube	11'	44", 60" raised front option	22"	50"	2.5" receiver tube below bumper
KMS30-11	15,000-19,500	30,000 ft-lb.	21" with outrigger tube	11'	44", 60" raised front option	22"	50"	2.5" receiver tube below bumper

*KMS are installed packages only

APU UNIT



8

MODEL OPTIONS

KMT1, KMT2 & KMT3

rment HT	COMPARTMENT DEPTH	CARGO AREA WIDTH	TOPS AND BACKS	REAR HITCH
, d front	22"	50"	1/8" smooth steel	2.5" receiver tube below bumper
,	22"	50"	1/8" smooth steel	Pintle mount plate below bumper
,	22"	50"	1/8" smooth steel	Pintle mount plate below bumper
	22"	50"	1/8" smooth steel	Pintle mount plate below bumper
,	22"	50"	1/8" smooth steel	Pintle mount plate below bumper

KMS16 & KMS30

COMMITMENT TO CORROSION RESISTANCE

Corrosion won't be a concern when you buy quality Knapheide products. To give you the best corrosion protection, we utilize a state-of-the-art, custom-designed, 12-step, SST cathodic electrodeposition finishing system, called "E-Coat."

It bonds prime paint to steel by an electroplating process to give you a superior coat of primer, resulting in better corrosion protection compared to spraying methods.

This system allows us to create products with the highest level of corrosion resistance available.

FREW ALL

EQUIPMENT CENTER

KNAPHEIDE.COM

KNARHFIDE

FOLLOW US LIKE US TAG US

f 🕑 in 🎔 🗖

SIX YEAR, LIMITED TIME WARRANTY



NO RUST THROUGH



DOOR HINGES WILL NOT FAIL OR COME OFF BODY



LATCHES AND LOCK CYLINDERS WILL NOT FAIL TO OPERATE



SHELVES WILL NOT BEND UNDER MAX. LOAD OF 250 LBS.

TO LEARN MORE VISIT www.knapheide.com/warranty



NEVER SETTLE

If you are going to be a leader, it takes more than building a high-quality product. It means never being totally satisfied with that product, no matter how high quality it may be. It requires constant vigilance and a willingness to take a chance on something new. And it means exceeding expectations every time. As the industry changes, one thing never will—our commitment to making customers like you as productive and efficient as possible. We know you don't settle, and we don't either. That's why we want you never to settle for anything less than Knapheide on the back of your truck.

KNAPHEIDE. NEVER SETTLE.



The Knapheide Manufacturing Company 1848 Westphalia Strasse | Quincy, IL 62305 217-222-7131 www.knapheide.com