




Self-Contained Compactor SCC-34SC



Standard Specifications

- 6" x 2" x ¼" Longsills
- 1¼" Solid Bullnose Inserted 4" and Fully Welded
- ½" Pull Plate with 1-¼" Pull Hook (Double-End Pick-Up)
- 4" x 6" Solid Steel Nosecone Rollers with ½" Plate Brackets
- 3" Structural Channel Crossmembers on 16" Centers
- 8" Diameter x 10" Long Front and Rear Ground Rollers
- 7 Ga. Floor
- 7 Ga. Roof
- 7 Ga. Front Sheet
- 7 Ga. Side Sheets with (1) Fire Dept. Fitting and Plug per Side
- 7 Ga. Rear Door Sheet
- Clear Top Opening: 37.2" x 60"
- Cycle Time: 39 Seconds
- Total Normal Force: 39,566 lbs
- Total Maximum Force: 43,964 lbs
- Normal Ram Face Pressure: 23.5 psi
- Maximum Ram Face Pressure: 26.2 psi
- Ram Penetration: 11 inches
- Motor: 10 HP
- Pump: 12 GPM
- Normal Hydraulic Pressure: 1,800 psi
- Maximum Hydraulic Pressure: 2,000 psi
- Cylinder Stroke (Dual Cylinders): 37 inches
- Cylinder Bore (Dual Cylinders): 4 inches
- Cylinder Rod Diameter (Dual Cylinders): 2 inches
- Hydraulic Reservoir Capacity: 25 gallons
- Painted Any Standard Color

*ALL MEASUREMENTS ARE NOMINAL

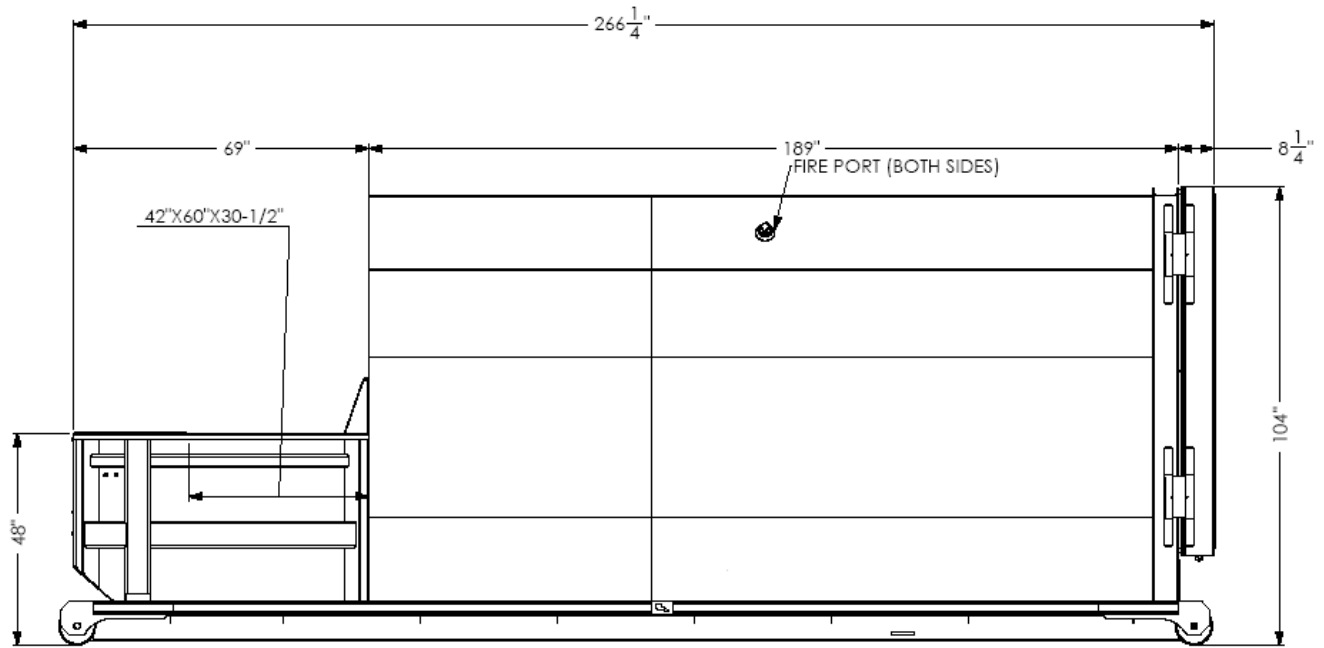

MODEL NUMBER	CUBIC YARDS	APPROX. WEIGHT	QTY PER LOAD
SCC-34SC	34	10,500 LBS.	2