

GapVax.

VAX SERIES



WEIGHT NO MORE!
MEET YOUR NEW FAVORITE
ROAD LEGAL HYDRO VAC

GapVax



WET / DRY SINGLE MODE FILTRATION

GapVax delivers optimum weight distribution for "Bridge Law" compliant states. The 15,000 lb. payload and low-profile (12' 2") overall height make it the ideal solution for all-around hydro excavation projects. The GapVax superior vacuum system with wet / dry filtration is quiet, reliable, and simple. This superior filtration design includes ultra-efficient centrifugal cyclone separators and long-lasting filter bags. The VHX offers a powerful combination of a 13 GPM, 3,000 PSI water system with optional 200 CFM air compressor system. The GapVax standard full tilting debris body allows for fast unloading and easy cleanout. Ease of operation and maintenance keep the operator in mind as with all of our products. Outperform the competition and stay road legal with the best trucks in the business! The GapVax VHX is ready for anything!



ULTRA EFFICIENT CYCLONES & LONG-LASTING FILTER BAGS

FILTRATION:

- Wet or Dry single mode filtration
- Top loading debris tank, 14" stainless steel floatball shutoff, two centrifugal cyclone material separators
- Baghouse with 21 snap-ring type filter bags and heavy-duty galvanized cages

DEBRIS BODY:

- 7.5 cubic yards
- Dump angle at over 45° for fast unloading and easy clean-out
- Full opening tailgate with field-adjustable locks that assure a complete seal

15,000 LB. PAYLOAD CAPACITY



BOOM SYSTEM:

- 8" Telescoping boom, 22' reach with a 15° downward pivot
- Optimized for hydro excavation

8" TUBE IN TUBE BOOM

VACUUM SYSTEM:

- Positive displacement pump; 4,000 CFM, 28" Hg
- 600 HP transfer case with air-shift engagement
- Specifically designed ultra-quiet air injection and discharge silencers

4,000 CFM, 28" HG PD BLOWER



HEIGHT CONSCIOUS AT 12' 2"




OTHER FEATURES INCLUDE:

- Noise and vibration dampening mounts on blower and transfer case
- High efficiency, low maintenance aluminum air duct construction with cleanout access
- Full bearing body pivot
- Heavy-duty electric vibrator with thermal overload protection
- Dual rear splash plates
- Body and tailgate safety props

OPTIONS:

- Stainless steel debris body
- Full-sized vertical heated cabinet
- Onboard scale
- Water heater options 400,000 BTU or 575,000 BTU
- Glycol injection
- 200 CFM Air compressor system
- Liquid level load indicator
- Auxiliary lift axles
- Tailgate load port
- Various tube racks, toolboxes, and storage
- Various lighting options
- Remote wireless controls

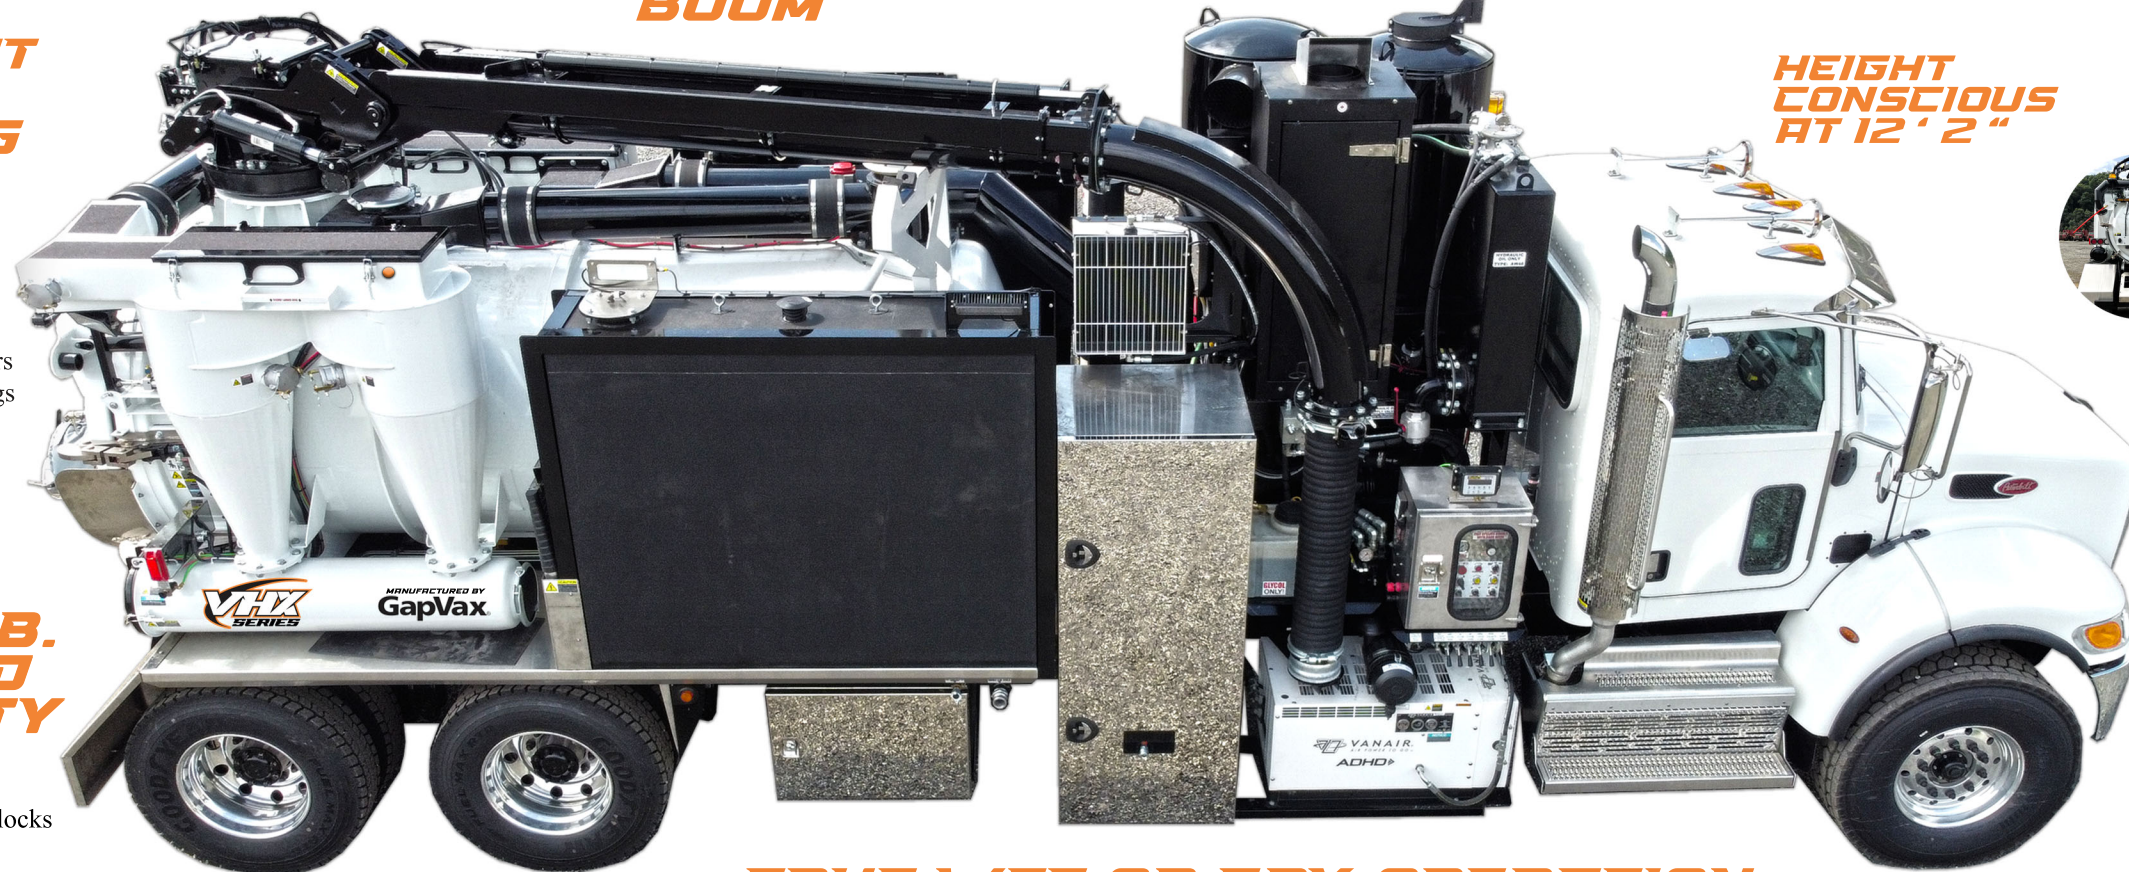

TRUE WET OR DRY OPERATION

WATER SYSTEM:

- 750 gallons of water (two 375 gallon poly tanks)
- Hydraulically-driven Tri-plex water pump
- 13 GPM/3,000 PSI (other options available)



*SPECS SUBJECT TO CHANGE WITHOUT NOTICE

IMPROVED SAFETY FEATURES

OPTIMUM WEIGHT DISTRIBUTION

INCREASED PERFORMANCE



**HELLO PERFORMANCE
GOODBYE WEIGHT ISSUES**



**AQUIP, LLC
ANNA@AQUIPCO.COM
(478) 837-2662**



Headquarters
575 Central Avenue
Johnstown, PA 15902
888-442-7829