


Prepared For:
NC SHERIFFS ASSOC.
CONTRACT SALES NCSA
323 W Jones St.
Raleigh, NC 27603-1365
(919)743 - 7433
Reference ID: CV 16K 4X2 DAY

Presented By:
WHITE'S INTERNATIONAL TRUCK
Rick Beavan
7045 ALBERT PICK RD,
PO BOX 18605
GREENSBORO NC 27419 -
(336)553-4712

NC SHERIFF'S ASSOC. BID 24-08-0421. STANDARD SPECIFICATIONS FOR THE MODEL ARE SHOWN BELOW. OPTIONAL EQUIPMENT IS AVAILABLE TO CUSTOMIZE VEHICLE TO MEET USER SPECIFICATIONS. ALL OPTIONS ARE DISCOUNTED AT THE PUBLISHED RATE.

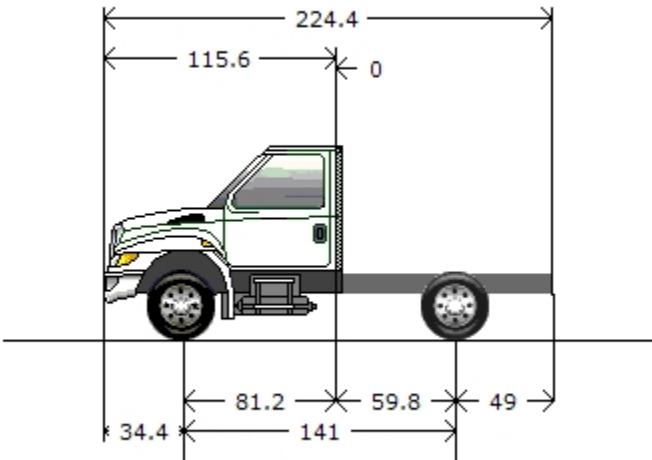

Model Profile
2024 CV515 SFA (CV515)

AXLE CONFIG:	4X2
MISSION:	Requested GVWR: 16000. Calc. GVWR: 16000. Calc. GCWR: 30000 Calc. Start / Grade Ability: 43.75% / 4.30% @ 55 MPH Calc. Geared Speed: 102.2 MPH
DIMENSION:	Wheelbase: 141.00, CA: 59.80, Axle to Frame: 49.00
ENGINE, DIESEL:	{International 6.6} EPA 2021, 350HP @ 2700 RPM, 700 lb-ft Torque @ 1600 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 1750 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 19,500-lb GVW and 37,500-lb GCW Max, On/Off Highway
AXLE, FRONT NON-DRIVING:	{Dana Spicer D-800N} I-Beam Type, 6,250-lb Capacity
AXLE, REAR, SINGLE:	{Dana Spicer S14-110} Single Reduction, 10,000-lb Capacity, 190 Wheel Ends Gear Ratio: 4.30
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 225/70R19.5 Load Range G HYBRID HS3 (CONTINENTAL), 649 rev/mile, 87 MPH, All- Position
TIRE, REAR:	(4) 225/70R19.5 Load Range G HYBRID HS3 (CONTINENTAL), 649 rev/mile, 87 MPH, All- Position
SUSPENSION, REAR, SINGLE:	11,000-lb Capacity, Vari-Rate Springs
PAINT:	Cab schematic 100CX Location 1: 9219, Winter White (Std) Chassis schematic N/A