


**Prepared For:**

NC SHERIFFS ASSOC.  
CONTRACT SALES NCSA  
323 W Jones St.  
Raleigh, NC 27603-1365  
(919)743 - 7433  
Reference ID: HV607

**Presented By:**

WHITE'S INTERNATIONAL TRUCK  
Rick Beavan  
7045 ALBERT PICK RD,  
PO BOX 18605  
GREENSBORO NC 27419 -  
(336)553-4712

NC SHERIFF'S ASSOC. BID 24-08-0421. STANDARD SPECIFICATIONS FOR THE MODEL ARE SHOWN BELOW. OPTIONAL EQUIPMENT IS AVAILABLE TO CUSTOMIZE VEHICLE TO MEET USER SPECIFICATIONS. ALL OPTIONS ARE DISCOUNTED AT THE PUBLISHED RATE.

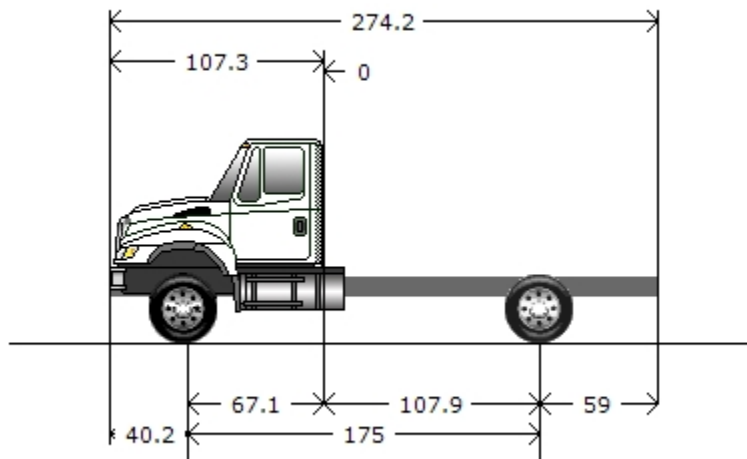

**Model Profile**  
**2025 HV607 SBA (HV607)**

**AXLE CONFIG:**

4X2

**MISSION:**

Requested GVWR: 35000. Calc. GVWR: 35000. Calc. GCWR: 50000  
Calc. Start / Grade Ability: 28.93% / 1.80% @ 55 MPH  
Calc. Geared Speed: 87.4 MPH

**DIMENSION:**

Wheelbase: 175.00, CA: 107.90, Axle to Frame: 59.00

**ENGINE, DIESEL:**

{Cummins B6.7 250} EPA 2021, 250HP @ 2400 RPM, 660 lb-ft Torque @ 1600 RPM, 2600 RPM  
Governed Speed, 250 Peak HP (Max)

**TRANSMISSION, AUTOMATIC:**

{Allison 3500 RDS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with  
PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max,  
On/Off Highway

**CLUTCH:**

Omit Item (Clutch &amp; Control)

**AXLE, FRONT NON-DRIVING:**

{Meritor MFS-12-143A} Wide Track, I-Beam Type, 12,000-lb Capacity

**AXLE, REAR, SINGLE:**

{Dana Spicer S23-172} Single Reduction, 23,000-lb Capacity, R Wheel Ends Gear Ratio: 5.57

**CAB:**

Conventional, Day Cab

**TIRE, FRONT:**

(2) 11R22.5 Load Range G ECOPLUS HS3+ (CONTINENTAL), 495 rev/mile, 75 MPH, All-  
Position

**TIRE, REAR:**

(4) 11R22.5 Load Range G HDL2 (CONTINENTAL), 493 rev/mile, 75 MPH, Drive

**SUSPENSION, REAR, SINGLE:**

23,500-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Rubber Springs

**PAINT:**

Cab schematic 100WL

Location 1: 9219, Winter White (Std)

Chassis schematic N/A