


Prepared For:

NC SHERIFFS ASSOC.
CONTRACT SALES NCSA
323 W Jones St.
Raleigh, NC 27603-1365
(919)743 - 7433
Reference ID: HV613

Presented By:

WHITE'S INTERNATIONAL TRUCK
Rick Beavan
7045 ALBERT PICK RD,
PO BOX 18605
GREENSBORO NC 27419 -
(336)553-4712

NC SHERIFF'S ASSOC. BID 24-08-0421. STANDARD SPECIFICATIONS FOR THE MODEL ARE SHOWN BELOW. OPTIONAL EQUIPMENT IS AVAILABLE TO CUSTOMIZE VEHICLE TO MEET USER SPECIFICATIONS. ALL OPTIONS ARE DISCOUNTED AT THE PUBLISHED RATE.

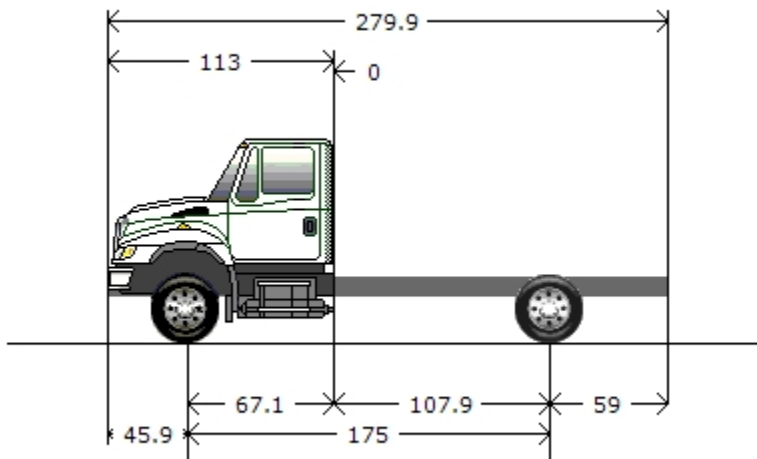

Model Profile
2025 HV613 SBA (HV613)

AXLE CONFIG:

4X2

MISSION:

Requested GVWR: 35000. Calc. GVWR: 35000. Calc. GCWR: 80000
Calc. Start / Grade Ability: 30.93% / 4.74% @ 55 MPH
Calc. Geared Speed: 73.1 MPH

DIMENSION:

Wheelbase: 175.00, CA: 107.90, Axle to Frame: 59.00

ENGINE, DIESEL:

{International A26} EPA 2021, 365HP @ 1700 RPM, 1250 lb-ft Torque @ 900 RPM, 2100 RPM
Governed Speed, 365 Peak HP (Max)

TRANSMISSION, AUTOMATIC:

{Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with
PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max,
On/Off Highway

CLUTCH:

Omit Item (Clutch & Control)

AXLE, FRONT NON-DRIVING:

{Meritor MFS-12-143A} Wide Track, I-Beam Type, 12,000-lb Capacity

AXLE, REAR, SINGLE:

{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends Gear Ratio: 5.38

CAB:

Conventional, Day Cab

TIRE, FRONT:

(2) 11R22.5 Load Range G ECOPLUS HS3+ (CONTINENTAL), 495 rev/mile, 75 MPH, All-
Position

TIRE, REAR:

(4) 11R22.5 Load Range G HDL2 (CONTINENTAL), 493 rev/mile, 75 MPH, Drive

SUSPENSION, REAR, SINGLE:

23,500-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Rubber Springs

PAINT:

Cab schematic 100WN

Location 1: 9219, Winter White (Std)

Chassis schematic N/A