


**Prepared For:**

NC SHERIFFS ASSOC.  
CONTRACT SALES NCSA  
323 W Jones St.  
Raleigh, NC 27603-1365  
(919)743 - 7433  
Reference ID: LT625 4X2

**Presented By:**

WHITE'S INTERNATIONAL TRUCK  
Rick Beavan  
7045 ALBERT PICK RD,  
PO BOX 18605  
GREENSBORO NC 27419 -  
(336)553-4712

NC SHERIFF'S ASSOC. BID 24-08-0421. STANDARD SPECIFICATIONS FOR THE MODEL ARE SHOWN BELOW. OPTIONAL EQUIPMENT IS AVAILABLE TO CUSTOMIZE VEHICLE TO MEET USER SPECIFICATIONS. ALL OPTIONS ARE DISCOUNTED AT THE PUBLISHED RATE.

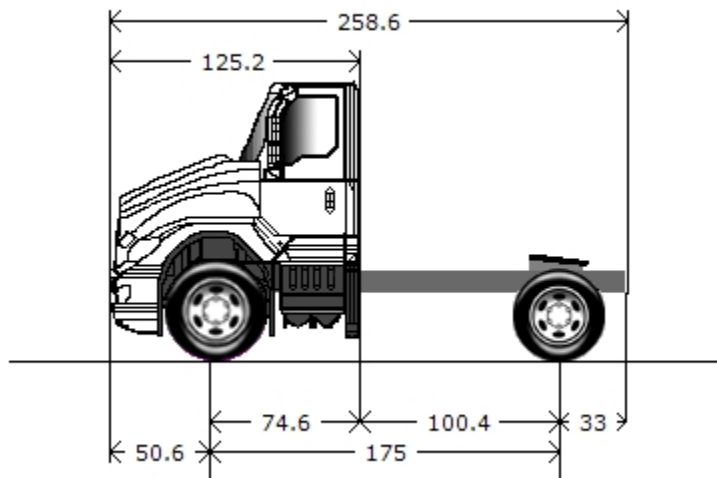

**Model Profile**  
**2025 LT625 4x2 (LT62A)**

**MISSION:**

Requested GCWR: 80000. Calc. GCWR: 95000. Calc. GVWR: 32350  
Calc. Start / Grade Ability: 17.14% / 1.31% @ 65 MPH  
Calc. Geared Speed: 86.6 MPH

**DIMENSION:**

Wheelbase: 175.00, CA: 100.40, Axle to Frame: 33.00

**ENGINE, DIESEL:**

{International A26} EPA 2021, 430HP @ 1700 RPM, 1550 lb-ft Torque @ 900 RPM, 1800 RPM  
Governed Speed, 430 Peak HP (Max)

**TRANSMISSION, MANUAL:**

{Fuller FRO-16210C} 10-Speed Manual, Overdrive, Air Shift, Internal Lube Oil Pump

**CLUTCH:**

{Eaton Fuller Advantage} Self-Adjusting, 15.5" Dia Two-Plate, Cast Angle Spring, Ceramic, 7-Spring Coaxial VCT Plus Damper with Pre-Damper, 2"-10 Tooth Spline, Mechanical Pull-Type Control, 4-Button Disc, 1750 lb-ft Torque Capacity

**AXLE, FRONT NON-DRIVING:**

{Hendrickson Steertek NXT} Wide Track, Fabricated Type, 12,350-lb Capacity

**AXLE, REAR, SINGLE:**

{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends Gear Ratio: 3.42

**CAB:**

Conventional, Day Cab

**TIRE, FRONT:**

(2) 11R22.5 Load Range G ECOPLUS HS3+ (CONTINENTAL), 495 rev/mile, 75 MPH, All-Position

**TIRE, REAR:**

(4) 11R22.5 Load Range G HDL2 (CONTINENTAL), 493 rev/mile, 75 MPH, Drive

**SUSPENSION, REAR, AIR, SINGLE:**

{International IROS} 20,000-lb Capacity, 9.25" Ride Height, with Shock Absorbers

**PAINT:**

Cab schematic 100HX

Location 1: 9219, Winter White (Std)

Chassis schematic N/A