


Prepared For:

NC SHERIFFS ASSOC.
CONTRACT SALES NCSA
323 W Jones St.
Raleigh, NC 27603-1365
(919)743 - 7433
Reference ID: MV607

Presented By:

WHITE'S INTERNATIONAL TRUCK
Rick Beavan
7045 ALBERT PICK RD,
PO BOX 18605
GREENSBORO NC 27419 -
(336)553-4712

NC SHERIFF'S ASSOC. BID 24-08-0421. STANDARD SPECIFICATIONS FOR THE MODEL ARE SHOWN BELOW. OPTIONAL EQUIPMENT IS AVAILABLE TO CUSTOMIZE VEHICLE TO MEET USER SPECIFICATIONS. ALL OPTIONS ARE DISCOUNTED AT THE PUBLISHED RATE.

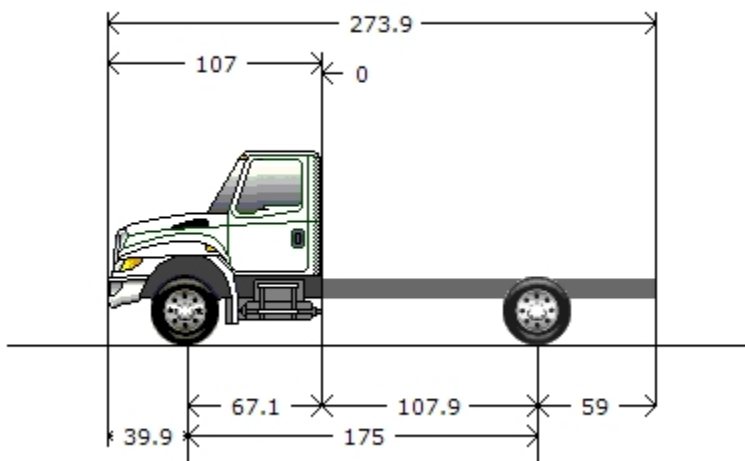

Model Profile
2025 MV607 SBA (MV607)

AXLE CONFIG:

4X2

MISSION:

Requested GVWR: 25500. Calc. GVWR: 25999. Calc. GCWR: 33000
Calc. Start / Grade Ability: 29.75% / 2.46% @ 55 MPH
Calc. Geared Speed: 87.3 MPH

DIMENSION:

Wheelbase: 175.00, CA: 107.90, Axle to Frame: 59.00

ENGINE, DIESEL:

{Cummins B6.7 250} EPA 2021, 250HP @ 2400 RPM, 660 lb-ft Torque @ 1600 RPM, 2600 RPM
Governed Speed, 250 Peak HP (Max)

TRANSMISSION, AUTOMATIC:

{Allison 2500 RDS} 6th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with
PTO Provision, Less Retarder, with 33,000-lb GVW and GCW Max

CLUTCH:

Omit Item (Clutch & Control)

AXLE, FRONT NON-DRIVING:

{Meritor MFS-09-122A} I-Beam Type, 9,000-lb Capacity

AXLE, REAR, SINGLE:

{Dana Spicer 21060S} Single Reduction, 17,500-lb Capacity, R Wheel Ends Gear Ratio: 5.57

CAB:

Conventional, Day Cab

TIRE, FRONT:

(2) 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position

TIRE, REAR:

(4) 11R22.5 Load Range G AH37 (HANKOOK), 501 rev/mile, 75 MPH, All-Position

SUSPENSION, REAR, SINGLE:

20,000-lb Capacity, Vari-Rate Springs, with 4500-lb Capacity Auxiliary Rubber Springs

PAINT:

Cab schematic 100WP

Location 1: 9219, Winter White (Std)

Chassis schematic N/A