
INTERNATIONAL®

Prepared For: NC SHERIFFS ASSOC. CONTRACT SALES NCSA 323 W Jones St. Raleigh, NC 27603-1365 (919)743 - 7433 Reference ID: RH613 6X4 Presented By: WHITE'S INTERNATIONAL TRUCK Rick Beavan 7045 ALBERT PICK RD, PO BOX 18605 GREENSBORO NC 27419 -(336)553-4712

NC SHERIFF'S ASSOC. BID 24-08-0421. STANDARD SPECIFICATIONS FOR THE MODEL ARE SHOWN BELOW. OPTIONAL EQUIPMENT IS AVAILABLE TO CUSTOMIZE VEHICLE TO MEET USER SPECIFICATIONS. ALL OPTIONS ARE DISCOUNTED AT THE PUBLISHED RATE.

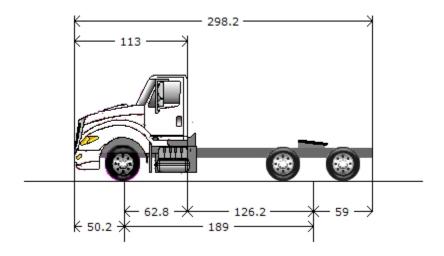

Model Profile 2025 RH613 6x4 (RH61F)

MISSION: Requested GCWR: 80000. Calc. GCWR: 80000. Calc. GVWR: 52350 Calc. Start / Grade Ability: 10.14% / 0.97% @ 65 MPH Calc. Geared Speed: 105.2 MPH **DIMENSION:** Wheelbase: 189.00, CA: 126.20, Axle to Frame: 59.00 {International A26} EPA 2021, 410HP @ 1700 RPM, 1450 lb-ft Torgue @ 900 RPM, 2100 RPM ENGINE, DIESEL: Governed Speed, 410 Peak HP (Max) **TRANSMISSION, AUTOMATIC:** {Allison 3414 RHS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, Less PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max CLUTCH: **Omit Item (Clutch & Control)** AXLE, FRONT NON-DRIVING: {Hendrickson Steertek NXT} Wide Track, Fabricated Type, 12,350-lb Capacity AXLE, REAR, TANDEM: {Meritor MT-40-14X-5CFR} Single Reduction, Amboid Gearing in Rear-Rear Axle 40.000-lb Capacity, .5"(12.7mm) Wall Housing Thickness, R Wheel Ends Gear Ratio: 4.11 CAB: Conventional, Day Cab TIRE, FRONT: (2) 11R22.5 Load Range H HSR 3 (CONTINENTAL), 494 rev/mile, 75 MPH, All-Position (8) 11R22.5 Load Range H HSR 3 (CONTINENTAL), 494 rev/mile, 75 MPH, All-Position TIRE, REAR: SUSPENSION, REAR, AIR, TANDEM: {International} Ride Optimized Suspension (IROS) Heavy Duty, 40,000-lb Capacity. 60" Axle Spacing, 9.25" Ride Height, Includes Heavy Duty Spring Hangers, Crossmembers and Fasteners, with Shock Absorbers PAINT: Cab schematic 100HW Location 1: 9219, Winter White (Std) Chassis schematic N/A