

CURBTENDER PHOENIX STANDARD FEATURES

25 YD BODY CAPACITY

ACCESS DOOR W/ INTERLOCK

MANUAL TAILGATE LOCKS

ANTI-SAIL MUD FLAPS AHEAD OF REAR AXLE

FULL EJECT

HOT SHIFT PTO, DM PUMP, W/ OVERSPEED PROTECTION

ALL LED BODY LIGHTS

DUAL PTO SHUT-OFF SWITCHES

DUAL DRIVER ALERT BUZZERS

COLOR LCD REAR VISION CAMERA SYSTEM

FACTORY MOUNTING

FACTORY PAINTING- PERFORMANCE WHITE

DELIVERY ANYWHERE IN NC

1 YEAR BODY & HYDRAULIC WARRANTY

1 YEAR CYLINDER WARRANTY

\$137,954.00



PHOENIX



CURBTENDER

www.curbtender.com

PHOENIX

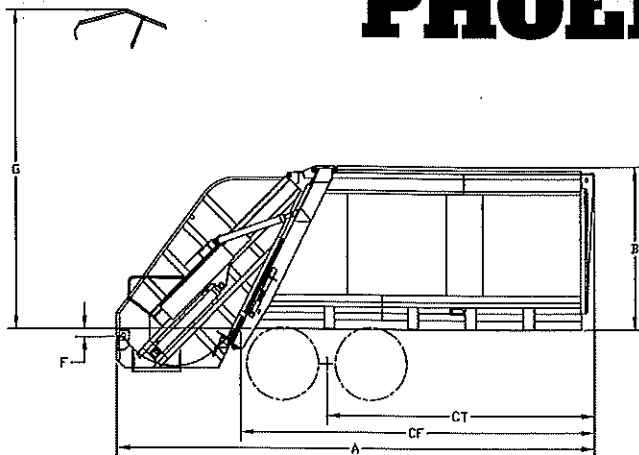

Body Specifications

	25 CU. YD.	32 CU. YD.
A: LENGTH OF BODY	280"	324"
B: HEIGHT OF BODY ABOVE CHASSIS	95"	95"
C: BODY WIDTH	96"	96"
D: HOPPER OPENING WIDTH	78"	78"
E: HOPPER OPENING HEIGHT	68"	68"
F: LOADING SILL ABOVE CHASSIS FRAME	4.6"	4.6"
G: HEIGHT OF TAILGATE ABOVE CHASSIS FRAME (TAILGATE RAISED)	182"	182"
HOPPER CAPACITY	2.8 CU. YD.	2.8 CU. YD.
HOPPER CAPACITY W/CLD	3.3 CU. YD.	3.3 CU. YD.
DYNAMIC HOPPER CAPACITY (CU. YD. /Min.)	6.5 CU. YD.	6.5 CU. YD.
APPROX. BODY WEIGHT	15,670 LBS	17,980 LBS

Minimum Chassis Requirements

MINIMUM GVWR TANDEM	60,000 LBS	66,000 LBS
FRONT AXLE	14,000 LBS	20,000 LBS
REAR AXLE	46,000 LBS	46,000 LBS
CT CAB TO TANDEM	156"	200"
CF MIN. TO END OF FRAME	205"	249"
REQUIRED FRAME HEIGHT	39" TO 43"	39" TO 43"

Body Construction

- Roof: 10 gauge GR80
- Sides: 10 gauge GR80
- Floor: 3/16" GR100
- Trough Floor: 1/4" GR100
- Ejection Panel: 7 gauge GR50
- Sweep Face: 1/4" AR400
- Tailgate Upper: 11 gauge GR50
- Tailgate Lower: 3/16" GR100
- Tailgate Floor: 1/4" AR400

Features

- High strength chiseled body side wall design
- High Compaction Rating
- Reinforced for heavy duty commercial waste collection
- Split-tailgate design for ultimate service access to packer area

- Auto back-pack
- Engine accelerator
- Reservoir sight gauge
- Chrome cylinder rods
- 30" x 34" access door (street side)
- Driver alert buzzer (curbside)
- LED ANSI/DOT lighting & Work Lights
- Rear camera system
- Pack cycle time: 24-28 seconds
- 12 month warranty

Hydraulics

- Oil Reservoir: 50 gal.
- Oil Flow w/ Standard Pump: 36 GPM
- Operating Pressure: 2,500 PSI
- Hose Burst Ratio: 4 to 1
- Return Filter: 10 micron
- Pack Cylinders: 5"
- Sweep Cylinders: 5"

- Eject Cylinders
- 25 cu. yd. - 5 1/4" 2 stage
- 32 cu. yd. - 6" 3 stage
- Tailgate Lift Cylinders: 3 1/2"

Optional Features

- Container roll bar with lip-and-latch
- 12,000 lbs. reeving winch
- 8,000 lbs. & 12,000 lbs. overhead drum winch
- Single or dual cart tipper
- Cart tipper tap-in-kits
- Arlock Container Lifting Device

CURBTENDER
www.curbtender.com

701 PERFORMANCE DRIVE, CEDAR FALLS, IA 50613

PHONE: 319.266.1721, FAX: 319.266.8207

© 2017 Curbtender Inc., All Rights Reserved. Specifications subject to change.