

CURBTENDER 12 YD AUTOCAT

FULL EJECT

HOT SHIFT PTO/VANE PUMP/EOS

POWERARM LT

JOYSTICK CONTROL

AUX SWITCHES- STREET LEVEL

STREETSIDE DOORS- 8" LOWER & 42" UPPER

CURBSIDE DOOR 36"

ALL LED BODY LIGHTS

SINGLE CAMERA SYSTEM, 7" COLOR LCD

TAILGATE

DUAL PTO SHUT-OFFS

MOUNTED ON SUITABLE CUSTOMER FURNISHED CHASSIS

PAINTED PERFORMANCE WHITE

12 MO BODY WARRANTY

12 MO CYLINDER WARRANTY

DELIVERED ANYWHERE IN NC

OWNER/OPERATOR TRAINING

\$149,985.00



AUTO CAT



CURBTENDER

www.curbtender.com

AUTO CAT

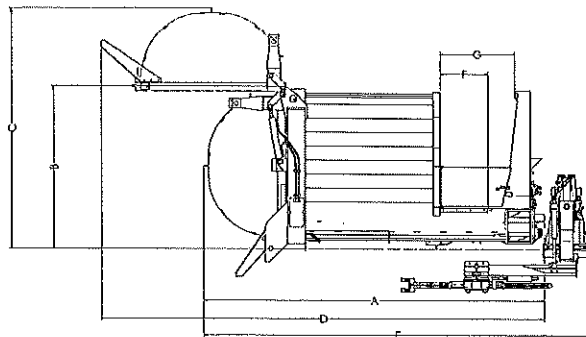

Body Specifications	12 CU. YD.	14 CU. YD.	18 CU. YD.
A: LENGTH OF BODY	178"	198"	228"
B: HEIGHT ABOVE CHASSIS FRAME	88"	88"	88"
C: HEIGHT ABOVE CHASSIS FRAME, TAIL GATE RAISED	119"	137"	137"
D: LENGTH OF BODY, TAIL GATE RAISED	238"	250"	282"
E: LENGTH OF LIFT ARM TO REAR OF BODY	200"	222"	254"
F: LOADING AREA WIDTH	31"	31"	31"
G: TOP OF HOPPER OPENING	46"	46"	46"
H: HEIGHT ABOVE CHASSIS LIFT ARM DUMP (30-100 gal.)	124"	124"	124"
WIDTH OF FENDERS	85", 92", 96"	85", 92", 96"	85", 92", 96"
BODY WEIGHT AND ARM	9,480 LBS	9,560 LBS	10,680"
HOPPER CAPACITY	3 CU. YD.	3 CU. YD.	3 CU. YD.

Minimum Chassis Requirements

MINIMUM GVWR	29,500 LBS.	31,000 LBS.	33,000 LBS.
FRONT AXLE	12,000 LBS.	12,000 LBS.	12,000 LBS.
REAR AXLE	17,500 LBS.	19,000 LBS.	21,000 LBS.
CAB TO AXLE	142"	144"	176"
FRAME HEIGHT	38" to 41"	38" to 41"	38" to 41"

Features

- Chiseled Shell Design: Ultra-high strength-to-weight ratio.
- Low manual loading sill height
- 17 second packing cycle times
- No-Fallback design
- Clean-out tray and doors both sides

Body Construction

- Sides: 11 gauge GR50
- Roof: 11 gauge GR50
- Floor: 3/16: Hardox
- Packer Face Panel: 3/8" 50,000 PSI

Gripper

- Dual-pressure grip selection
- Quick-change spring steel grippers

Power Arm Lift Mechanism

- 2,000 lb. lift arm capacity
- 6" x 8" 50,000 PSI telescopic boom
- Adjustable roller bearing guides
- Hardox 450 wear strips
- Hardened pivot points

Controls

- Electronic Proportional Controls
- Proportional hydraulic valve
- Proportional joystick control
- Cart Shake function

Optional Equipment

- Strobe lights
- Street side cart tipper
- Air hopper cover
- Work Lights
- Upper hopper doors

Hydraulic System

Cylinders – all double acting

- Pack (2) 3" dia.
- Eject (1) 3.5" dia.
- Tailgate (2) 3" dia.

Pump – Vane type

- Capacity: 14 GPM BODY & 25 GPM ARM
- Maximum operation pressure: 3,000 PSI

Hydraulic tank

- Capacity: 35 gallons
- Location: upper front
- Sight gauge: on tank
- Filter: 10 micron return line filter with by-pass valve

CURBTENDER
www.curbtender.com

701 PERFORMANCE DRIVE, CEDAR FALLS, IA 50613
PHONE: 319.266.1721, FAX: 319.266.8207

© 2017 Curbtender Inc., All Rights Reserved. Specifications subject to change.