

CURBTENDER POWERPAK STANDARD FEATURES

18 YD BODY CAPACITY (BUBBLE TAILGATE)
FULL EJECT
POWERARM LIFT ARM
EPC ELECTRIC-OVER-HYDRAULIC PROPORTIONAL CONTROLS
HOT SHIFT PTO
OPERATE-AT-IDLE TANDEM VANE PUMP
OVERSPEED PROTECTION
JOYSTICK WITH TOGGLE-TO-GRIP
STREET LEVEL AUX ROCKER SWITCHES
RESIDENTIAL BOLT-ON GRIPPERS
AIR-OPERATED HOPPER COVER
MUD FLAPS AHEAD OF REAR WHEELS
ALL LED BODY LIGHTS
AUTO TAILGATE LOCKS
COLOR LCD REAR VISION CAMERA SYSTEM
FACTORY MOUNTING
FACTORY PAINTING- PERFORMANCE WHITE
DELIVERY ANYWHERE IN NC
5 YEAR BODY STRUCTURAL, ARM STRUCTURAL, AND
OPERATIONAL ELECTRONICS WARRANTY
1 YEAR CYLINDER WARRANTY

\$183,933.00




POWERPAK



CURBTENDER

www.curbtender.com

POWERPAK

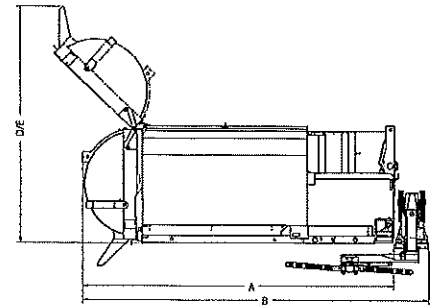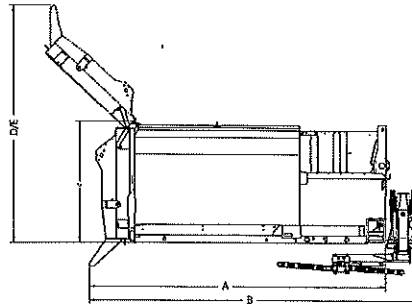

Body Specifications

FLAT TAILGATE DESIGN

BUBBLE TAILGATE DESIGN

BODY CAPACITY	18 CU. YD.	22 CU. YD.	25 CU. YD.	29 CU. YD.	20 CU. YD.	24 CU. YD.	27 CU. YD.	31 CU. YD.
A: BODY LENGTH	195"	219"	245"	267"	207"	231"	257"	279"
B: LENGTH OF LIFT ARM TO REAR OF BODY	224"	248"	274"	296"	236"	260"	286"	308"
C: HEIGHT OF BODY ABOVE CHASSIS	98"	98"	98"	98"	98"	98"	98"	98"
D: HEIGHT ABOVE CHASSIS REAR DOOR OPEN FIXED DUMP	157"	157"	157"	157"	157"	157"	157"	157"
E: HEIGHT ABOVE CHASSIS REAR DOOR OPEN TIP TO DUMP	194"	194"	194"	194"	194"	194"	194"	194"
F: HEIGHT ABOVE CHASSIS LIFT ARM DUMP (30-100 gal.)	124"	124"	124"	124"	124"	124"	124"	124"
G: HEIGHT ABOVE CHASSIS LIFT ARM DUMP (100-400 gal.)	135"	135"	135"	135"	135"	135"	135"	135"
HOPPER CAPACITY	4 CU. YD.	4 CU. YD.	4 CU. YD.	4 CU. YD.	4 CU. YD.	4 CU. YD.	4 CU. YD.	4 CU. YD.
BODY WEIGHT	13,012 LBS	13,528 LBS	14,017 LBS	14,434 LBS	13,633 LBS	14,149 LBS	14,638 LBS	15,055 LBS

Minimum Chassis Recommendations

MINIMUM GVWR	36,000 LBS	39,000 LBS	54,000 LBS	60,000 LBS	36,000 LBS	39,000 LBS	54,000 LBS	60,000 LBS
FRONT AXLE	13,000 LBS	14,000 LBS	18,000 LBS	20,000 LBS	13,000 LBS	14,000 LBS	18,000 LBS	20,000 LBS
REAR AXLE	23,000 LBS	23,000 LBS	-	-	23,000 LBS	23,000 LBS	-	-
REAR TANDEM	-	-	36,000 LBS	40,000 LBS	-	-	36,000 LBS	40,000 LBS
DROP AXLE	10,000 LBS	10,000 LBS	-	-	10,000 LBS	13,300 LBS	-	-
CAB TO AXLE	150"	175"	N/A	N/A	150"	175"	N/A	N/A
CAB TO TRUNNION	N/A	N/A	177"	203"	N/A	N/A	177"	203"
RESISTANCE TO BEND MOMENT	3,000,000	3,000,000	3,000,000	3,500,000	3,000,000	3,000,000	3,500,000	3,500,000

Body Construction

- Body Sides: 10 Gauge 80,000 PSI
- Body Roof: 10 Gauge 80,000 PSI
- Body Floor: 3/16" Hardox 450
- Hopper Sides: 3/16" Hardox 450
- Hopper Floor: 3/16" Hardox 450
- Hopper Liner: 3/16" Hardox 450

Tailgate Construction

- 10 gauge 80,000 PSI
- Raised and lower hydraulically
- Latched and unlatched hydraulically

Packing/Ejection Cylinder

- Pin-to-pin mounted
- double action telescopic
- 3 stage for all sizes

TTD Series

- Pin-to-pin
- double-action rod
- Single Stage 6"
- Max dump angle of 45°, consult with factory for height

Packing Ejection Panel

- 3/8" face sheet
- 2-piece hinged 3/16" follow panel

Hydraulics

- Tandem hydraulic pump
- 22 gpm arm, 55 gpm packer limit
- 3,000 PSI maximum system pressure
- 40 gal. Helgesen Hydro nucleation reservoir
- 10 micron absolute return filter

Gripper

- Dual-pressure grip selection
- Quick-change spring steel grippers
- Universal belt gripper (optional)

Lift Arm Mechanism

- 2,000 lb. arm lift rating
- 6" x 8" 50,000 PSI telescopic boom
- Adjustable roller bearing guides
- Hardox 450 wear strips
- Hardened pivot points

Controls (all optional)

- Air Over Hydraulic OR Electronic Proportional Controls
- Quick-Grip™ programmable gripper positioning
- Proportional hydraulic valve
- Proportional joystick control
- Auto Dump Shake function
- Coordinated auto-dumping



www.curbtender.com

701 PERFORMANCE DRIVE, CEDAR FALLS, IA 50613

PHONE: 319.266.1721, FAX: 319.266.8207

© 2017 Curbtender Inc., All Rights Reserved. Specifications subject to change.