

CURBTENDER PUP STANDARD FEATURES

6 YD BODY CAPACITY

MANUAL LOADING- BOTH SIDES

MANUAL TAILGATE OPERATION

ANTI-SAIL MUD FLAPS AHEAD OF REAR AXLE

HORIZONTAL PUSH LOAD EJECTION

HOT SHIFT PTO, DM PUMP, W/ OVERSPEED PROTECTION

ALL LED BODY LIGHTS

COLOR LCD REAR VISION CAMERA SYSTEM

FACTORY MOUNTING

FACTORY PAINTING- PERFORMANCE WHITE


DELIVERY ANYWHERE IN NC

1 YEAR BODY & HYDRAULIC WARRANTY

1 YEAR CYLINDER WARRANTY


\$72,954.00

PUP

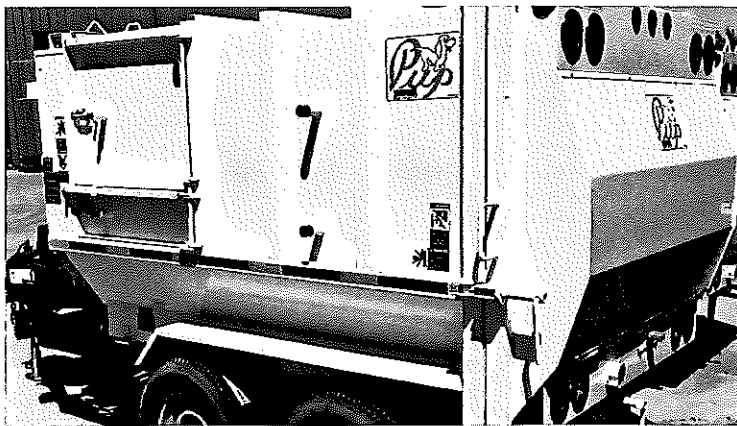

CURBTENDER
www.curbtender.com

PUP

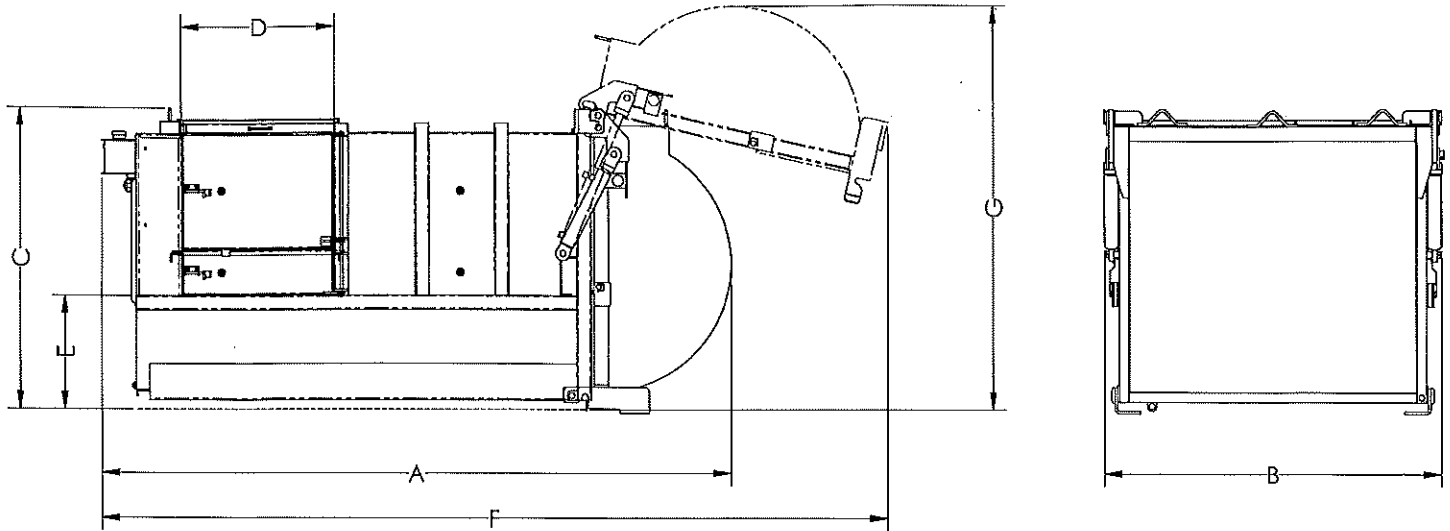

BODY SPECIFICATION	TRUCK MOUNT		TRAILER MOUNT	
	6 CU.YD.	7 CU.YD.	6 CU.YD.	7 CU.YD.
A LENGTH OF BODY	116"	132"	184"	200"
B WIDTH OF BODY	70"	70"	70"	70"
C HEIGHT ABOVE CHASSIS FRAME	64"	64"	64"	64"
D WIDTH OF HOPPER	31"	31"	31"	31"
E LOADING SILL HEIGHT ABOVE CHASSIS FRAME	25"	25"	25"	25"
F LENGTH OF BODY, TAIL GATE RAISED (HYDRAULIC TAILGATE)	165"	165"	232"	232"
G HEIGHT OF BODY, TAIL GATE RAISED (HYDRAULIC TAILGATE)	71"	85"	71"	85"
BODY WEIGHT	2,300 LBS.	2,442 LBS.	3,500 LBS	3,642 LBS

MINIMUM CHASSIS REQUIREMENTS

Minimum CGWR	10,000 LBS.	10,000 LBS.
CAB TO AXLE	60"	60"
CHASSIS FRAME HEIGHT	30"-36"	30"-36"

Body

- Manual Tailgate
- Full size eject panel
- Horizontal push load ejection
- Standard Body can be loaded from both sides
- 11 gauge standard body & hopper
- Meets ANSI Z245.1 safety standards

Hydraulic Specifications

- Working pressure: 1,500 PSI max
- Hydraulic oil flow: 12 GPM (chassis) @ 1000 rpm/ 8 GPM (trailer)
- Reservoir: 12 gal.
- Standard loading area cycle time: 15 seconds (chassis)/18 seconds (trailer)
- Packing/Ejection cylinders: 2 1/2" dia. (2)
- Return filter: 10 micron return

Optional Equipment

- Barrel dumper: left, right, dual
- Cart tipper: left, right, or dual
- Strobe light or rotating beacon
- Work light: right and left
- Hydraulic tailgate with auto lock

CURBTENDER
www.curbtender.com

701 PERFORMANCE DRIVE, CEDAR FALLS, IA 50613
PHONE: 319.266.1721, FAX: 319.266.8207

© 2017 Curbtender Inc., All Rights Reserved. Specifications subject to change.