



NCSA Heavy Equipment

Contract 24-08-0421

Item Number: 893

Model Number: C3

Group: Crushing Equipment

Make: McCloskey International

MSRP: \$1,200,000.00

Model: Cone

Discount 6%: (\$72,000.00)


Total Net Price: \$1,128,000.00

Price Does Not Include Freight

Commonwealth Equipment * 36 Hazleton St * Ashley PA 18706

Phone: 877-217-4474 * commonwealthequipment.com


MST03282023

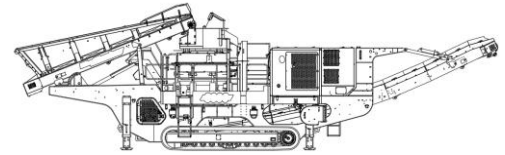

SPECIFICATIONS



McCloskey ***C3***

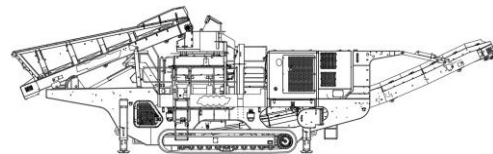

DESCRIPTION

Heavy duty track mounted Crusher with following features:

- MC300 Cone.
- 510Hp D13 Volvo Penta engine/ 516Hp C13 CAT LRC / 536Hp C13 CAT Stage V
- Tracked.
- Integrated hopper with folding rear door.
- I-beam plate fabricated chassis construction.
- Large gap between crusher discharge and main conveyor feedboot
- Open chassis design for ease of maintenance
- Fast setup time

DIMENSIONS AND WEIGHTS


Length - transport all models	17.5m (57' – 4")
Width - transport all models	3.15m (10' – 4")
Height - transport track	3.6m (11' – 9.7")
Weight - track	51,400 Kgs (113,310 lbs)

CAPACITIES

Diesel tank capacity	1100 L (290 US gal)
Hydraulic tank capacity	800 L (211 US Gals)


CRUSHING CHAMBER

Feed opening	1050mm (41")
Crusher input speed	750 - 950 rpm
Crusher Drive	Direct drive
Min. opening	See chart below
Max. opening	See chart below
Cone weight	16,000kg (35,273 lbs)
Closed side setting adjustment	Hydraulic
Level sensor	Ultrasonic
Throw	84mm at discharge with new liners
Power required	300 Hp

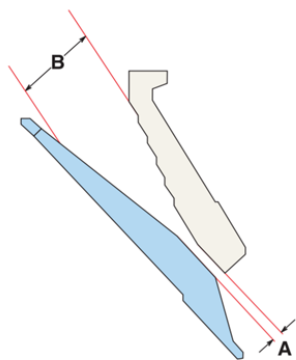

Crusher Cavity Selection

Crusher size	Cavity	Standard	
		Minimum Setting "A"1	Feed Opening "B"2
MC200	Fine	13mm (0.5")	95mm (3.74")
	Medium	17mm (0.67")	125mm (4.92")
	Coarse	19mm (0.75")	185mm (7.28")
MC300	Fine	13mm (0.5")	107mm (4.21")
	Medium	17mm (0.67")	150mm (5.91")
	Coarse	19mm (0.75")	211mm (8.31")
MC400	Medium	20mm (0.79")	198mm (7.8")
	Coarse	25mm (0.98")	252mm (9.92")
	Extra Coarse	30mm (1.18")	299mm (11.77")

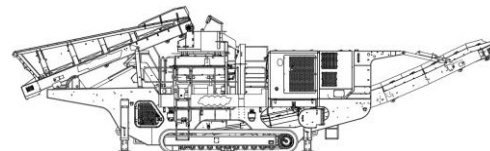

FEEDER

Feeder opening width	910mm (36")
Feeder drum crs.	6000mm (19' 8.2")
Drive	Hydraulic
Feeder belt width	1200mm (48")
Motor	Danfoss OMSS 125
Gearbox	Bonfig 809 W2 24.2:1
Flow rate	128 Lpm (33.8 US gpm)
Adjustable speed	Yes
Maximum speed	42 rpm

HOPPER


Length	3780mm (12' - 4.9")
Width	2200mm (7' - 2")
Volume	5m ³ (6.5yd ³) levelled off, 6.2m ³ (8.1yd ³) heaped
Material	6mm sides + 10mm Hardox liners

MAIN CONVEYOR (short)

Stockpile height	3472mm (11' - 4.7")
Belt width	1200mm (48")
Belt spec	Plain 500/3 8+2
Drive drum dia.	350mm (13.7")
Tail drum dia.	270mm (10.6")
Motor	OMV800
Flow rate	89.6 Lpm (23.7 US gpm)
Maximum speed	112 rpm
Angle adjustable	YES
Quick release	YES

POWERUNIT AND HYDRAULICS

Engine	Volvo D13 Tier 5 or Tier 3 CAT C13 Tier 3
Engine power	Volvo - 380 Kw (510HP) CAT - 328 Kw (440HP)
Engine speed	1570 - 1900 rpm
Cone drive clutch	PTtech HPTO14TF1
Flywheel Pump 1 (Tracks/Feeder)	Kawasaki K3VL80
Flywheel Pump 2 (Tracks/Main conveyor)	Kawasaki K3VL80
LH PTO Pump 3 (Auxiliary/Lube/pilot)	Turolla 29/29/10
Total system flow (max)	335 Lpm (88.5 US Gpm)
Hydraulic tank capacity	800 L (211 US Gals)

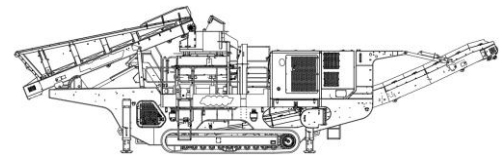

ELECTRICS

Emergency stops	4 off, 2 feeder, 2 power unit
Chassis cabling	Armored cable
Start Siren	YES – 10 sec delay
Control panel	Tedd Engineering / IFM
Engine shutdowns:	Low oil pressure
	High water temp
	Air filter blockage (selectable)
	Fuel contamination
	Low hydraulic tank level
	Low lube oil flow
	Low lube oil pressure
	High lube oil temperature
	High hydraulic oil temperature
Radio control tracks and feeder	STANDARD
Pendant track control	YES – plugged in control cabinet

TRACKS

Width	400mm (15.7")
Length	4100mm (13' – 5.4") crs
Height	817mm (32")
Gearbox	Bonfiglioli 711
Ratio	144:1
Motor	Rexroth A2FE90
Speed max	1.50 Kph (0.93 Mph)
Flow rate	152 Lpm (40.2 US gpm)
	Three speed system selectable at control panel with smooth start / stop.
Multiple speeds	

SAFETY FEATURES

- External belt alignment points
- External grease points
- Engine safety shutdown systems
- Full safety guarding for nip points

