

## 2024 Isuzu NQR Gas



Current report content is based on data as of 2023-04-20 03:24:00. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2024 Isuzu NQR Gas (2024 NQR Gas Cab Chassis, 1R2 132.5"WB, 110"CA, 17,950 GVWR. White, Standard model specifications with power windows and door locks

## Selected Model and Options

	Code	Description	Weight
<b>Model</b>			
	1R2 04	NQR Gas Cab Chassis 132.5"WB, 110"CA White, Standard model specifications with power windows and door locks	
<b>Vehicle Application</b>			
	RQ2	Truck Application	0.0 lbs.
<b>Tires</b>			
	I5H	LRR (low rolling resistance)	0.0 lbs.
<b>Engine</b>			
	L8T	GMPT 6.6L (400 CID) V8 gasoline engine; 350 HP at 4500 RPM; 425 lb-ft torque at 3800 RPM; precise fuel control direct injection technology; electronic throttle control; overhead valves with variable valve timing; heavy duty cast-iron cylinder block with six-bolt main-bearing cap; cast aluminum cylinder heads; forged steel crankshaft; stainless steel exhaust manifold.	0.0 lbs.
<b>Transmission</b>			
	Y6V	Allison 1000 RDS 6-speed automatic transmission w/o PTO. Gear Ratios: 3.100, 1.810, 1.410, 1.000, 0.710, 0.610, Rev 4.490:1	0.0 lbs.
<b>Wheelbase</b>			
	IA9	132.5 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in3 RBM 316,800 lb./ft./in. per rail. 110"CA	0.0 lbs.
<b>Air Cleaner</b>			
	KNX	Dry paper single element. Air cleaner canister standard with air restriction gauge.	0.0 lbs.
<b>Battery</b>			
	IL3	Single Delco 12-V maintenance free 750 CCA frame mounted battery box	0.0 lbs.
<b>Exhaust</b>			
	I41	Single horizontal aluminized steel with catalytic converter and oxygen sensor devices.	0.0 lbs.
<b>Front Axle</b>			
	ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.	0.0 lbs.
<b>Front Wheels</b>			
	IB9	19.5" x 6", 6-hole disc, painted white	0.0 lbs.
<b>Front Tires</b>			
	I8B	225/70R19.5G (14 ply) tubeless Radial, all season tread	0.0 lbs.
<b>Rear Axle</b>			
	ID3	Single-speed, 14,550 lb. capacity with oil lubricated rear wheel bearings.	0.0 lbs.
<b>Ratio</b>			
	011	5.571:1	0.0 lbs.
<b>Rear Wheels</b>			

Current report content is based on data as of 2023-04-20 03:24:00. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2024 Isuzu NQR Gas (2024 NQR Gas Cab Chassis, 1R2 132.5"WB, 110"CA, 17,950 GVWR. White, Standard model specifications with power windows and door locks

## Selected Model and Options

	Code	Description	Weight
	IC1	19.5" x 6", 6-hole disc, painted white	0.0 lbs.
Rear Tires			
	I9B	225/70R19.5G (14 ply) tubeless Radial, all season tread.	0.0 lbs.
Fuel Tank			
	A17	38.6 gal. rectangular fuel tank. Mounted between frame rail with electric type fuel pump (mounted in tank). Through the rail fuel fill.	0.0 lbs.
Seat			
	AQB	Driver seat is reclining high back. Two single occupant fold down seats with tray backs.	0.0 lbs.
Air Conditioning			
	C60	Air conditioner	0.0 lbs.
Power Windows & Door Locks			
	IL0	Yes	0.0 lbs.
Model Option			
	04	White, Standard model specifications with power windows and door locks	0.0 lbs.
Accessories			
	IX2	Rear body dome lamp switch	0.1 lbs.
	8RP	AM/FM/CD radio with Aux input/USB port and Bluetooth RPO	0.0 lbs.

Current report content is based on data as of 2023-04-20 03:24:00. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.




# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2024 Isuzu NQR Gas (2024 NQR Gas Cab Chassis, 1R2 132.5"WB, 110"CA, 17,950 GVWR. White, Standard model specifications with power windows and door locks

## Weight Distribution

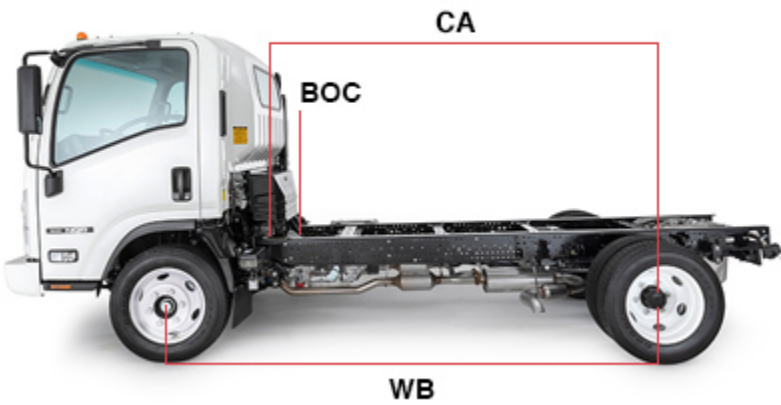

Front Wt.	4,013.00 lbs.	64%
Rear Wt.	2,223.00 lbs.	36%
GVWR	17,950.00 lbs.	
GVW	6,236.00 lbs.	
Remaining Payload Weight	11,714.00 lbs.	

Driver/Passenger Weight	350.0 lbs.
Wheelbase (WB)	132.5 inches
Cab-to-Axle (CA)	110 inches
Body Length	
Body Weight	
Back of Cab (BOC)	7.7 inches

**\*\* You must fill in body length and weight to enable body and payload weight calculations.**

Weight (lbs.)	Front	Rear	Total
Chassis	3,663.00	2,223.00	5,886.00
Chassis Equipment	0.00	0.00	0.00
Subtotal	3,663.00	2,223.00	5,886.00
Driver/Passengers	350.00	0.00	350.00
Body/Body Equipment	0.00	0.00	0.00
Payload	0.00	0.00	0.00
Total	4,013.00	2,223.00	6,236.00
GAWR/GVWR	6,830.00	13,660.00	17,950.00
GCWR			23,950.00

## Chassis Equipment:

Code	Item	Center of Gravity	Front Axle	Rear Axle	Total
04	White, Standard model specifications with power windows and door locks		0.00 lbs.	0.00 lbs.	0.00 lbs.

## Driver/Passengers:

	Center of Gravity	Front Axle	Rear Axle	Total
Driver	front axle	350.00 lbs.	0.00 lbs.	350.0 lbs.

Current report content is based on data as of 2023-04-20 03:24:00. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.



# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2024 Isuzu NQR Gas (2024 NQR Gas Cab Chassis, 1R2 132.5"WB, 110"CA, 17,950 GVWR. White, Standard model specifications with power windows and door locks

## Warranty

**Warranty Limitations:** *Time or Mileage, Whichever Comes First*

New Truck Warranty		Time in Years	Vehicle Miles
Basic		3	36,000
Engine			
Transmission		5	75,000
Drive Axle			
Frame Rails		3	36,000
		5*	Unlimited*
Corrosion (Rust Through)		4	Unlimited
Roadside Assistance		3	36,000
		5†	75,000†
Emission Warranty		Time in Years	Vehicle Miles
Emissions Defect Warranty - Federal		5	50,000
Emissions Performance Warranty - Federal		5	50,000
Emissions Defect Warranty (NPR model) - California**		3	50,000
		7	70,000
Emissions Defect Warranty (NPR-HD model) - California**		5	50,000
GHG Emission		5	50,000
Tires		2	24,000

\*After 3 years or 36,000 miles (whichever comes first), labor and parts coverage is 50% for up to 5 years.

†Tows related to powertrain issues may be covered for up to 5 years or 75,000 miles (whichever comes first).

\*\*Please see warranty booklet for coverage details.

The warranty coverages are determined by the mileage of the vehicle and the number of years from the delivery date. The warranty coverages are limited by whichever occurs first. Please see your authorized Isuzu dealer for warranty details.



# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | [tward@lilleyinternational.com](mailto:tward@lilleyinternational.com)

2024 Isuzu NQR Gas (2024 NQR Gas Cab Chassis, 1R2 132.5"WB, 110"CA, 17,950 GVWR. White, Standard model specifications with power windows and door locks

## Turning Circle

Specification Summary	
Model	1R204
Front Axle ID2	"I"-beam rated at 6,830 lbs. Includes integral hydraulic power steering. Ratio 18.8-20.9:1.
Wheelbase IA9	132.5 inches, includes ladder type channel frame. Full C section straight frame 33.5 inches wide. Yield strength 44,000 psi; section modulus 7.20 in3 RBM 316,800 lb./ft./in. per rail.
Front Wheels IB9	19.5" x 6", 6-hole disc, painted white
Front Tires I8B	225/70R19.5G (14 ply) tubeless Radial, all season tread

Current report content is based on data as of 2023-04-20 03:24:00. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.




# LILLEY ISUZU TRUCK

Troy Ward | 252-217-7887 | tward@lilleyinternational.com

2024 Isuzu NQR Gas (2024 NQR Gas Cab Chassis, 1R2 132.5"WB, 110"CA, 17,950 GVWR. White, Standard model specifications with power windows and door locks

## Turning Circle

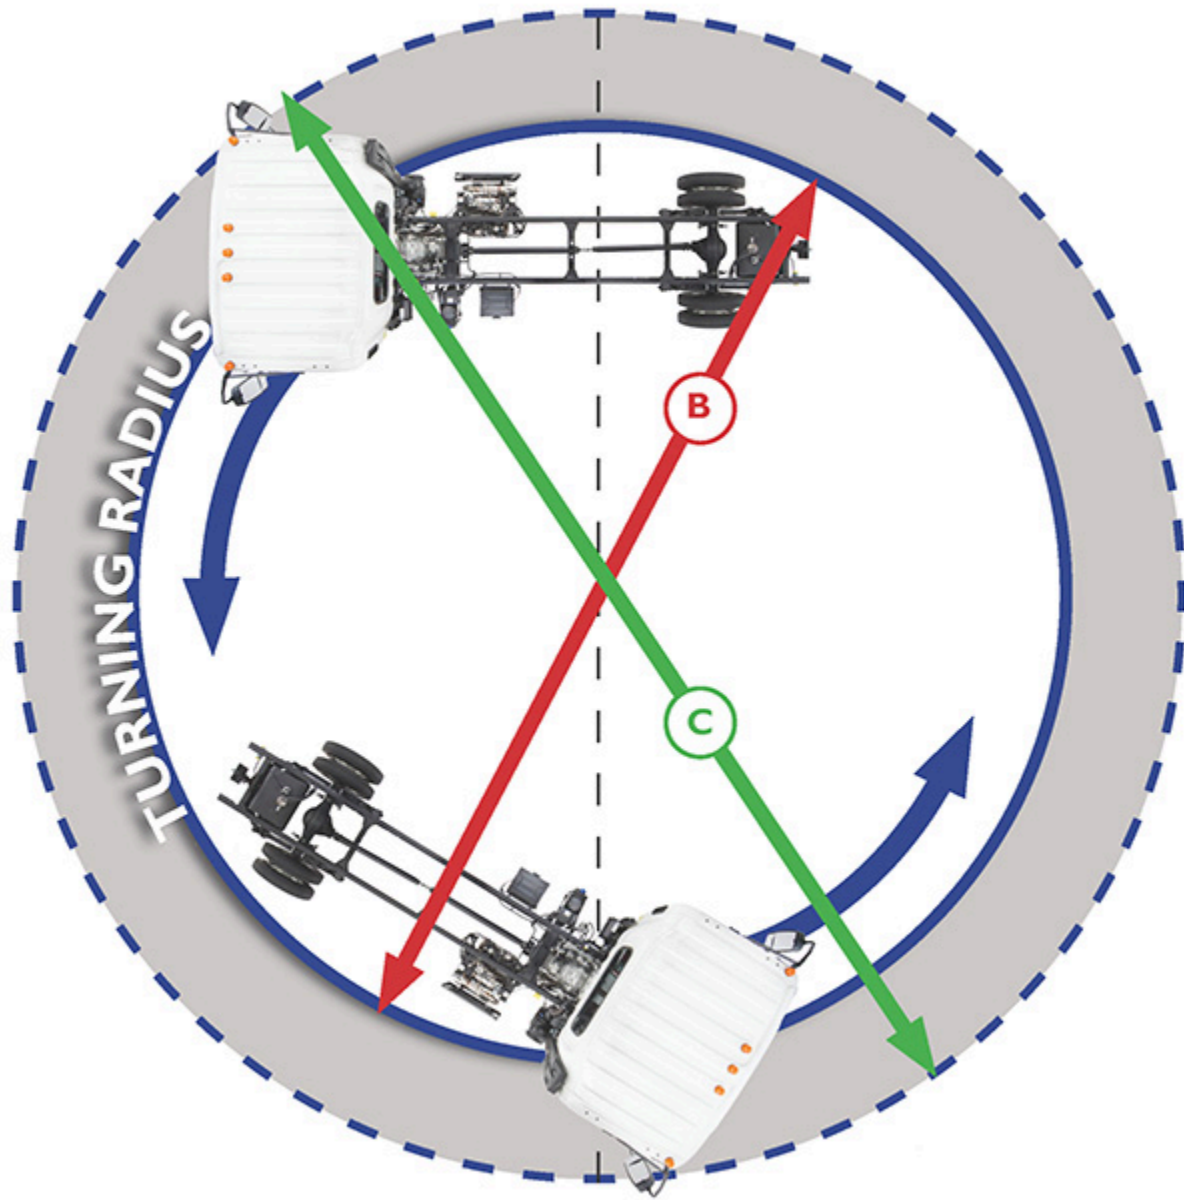

**A: Inside Wheel Cut Angle: 46.50°**

**B: Minimum turning diameter, Curb to Curb: 40.00'**

Curb to Curb diameter is measured from the outside of the front tire.

**C: Minimum turning diameter, Wall to Wall: 44.90'**

Wall to Wall diameter is measured from the outermost part of the cab.

Current report content is based on data as of 2023-04-20 03:24:00. Any performance-related calculations are offered solely as guidelines. Actual vehicle performance will depend on your operating conditions. All Information, specifications and pricing in this application are based on the latest information available. Isuzu Commercial Truck of America, Inc. reserves the right to discontinue or change, at any time, without prior notice, the pricing, specifications, options, materials, equipment, design and models.