

WS-16124

Three-Step Floor Jack

132,000 lbs.

ARI-HETRA's Model WS-16124 Three-Step Air-Hydraulic Floor Jack is suitable for partially lifting heavy-duty vehicles, allowing the user to remove and replace one wheel at a time, up to 132,000 lbs.



Features

- Wheeled-base for easy handling.
- All controls are conveniently located on handlebar.
- Multi-step lifting cylinder allows low entry height for max vehicle flexibility.
- Simulated lifetime fatigue test (50-100 lift cycles per day for over 10 years).

Safety


- Safety device to prevent load from descending if air supply fails.

Included Accessories

- A02354 – 0.5 in. Extension
- A02410 – 2.75 in. Extension
- A02406 – 4.75 in. Extension

Description

| | |
|------------------------|----------------------------|
| Step 1 Capacity | 132,000 lbs. |
| Step 2 Capacity | 66,000 lbs. |
| Step 3 Capacity | 40,000 lbs. |
| Dimensions (L x W x H) | 26 in. x 12 in. x 54.5 in. |
| Working Air Pressure | 116 – 145 PSI |
| Net Weight | 110 lbs. |
| Min – Max Height | 4.75 in. – 10 in. |

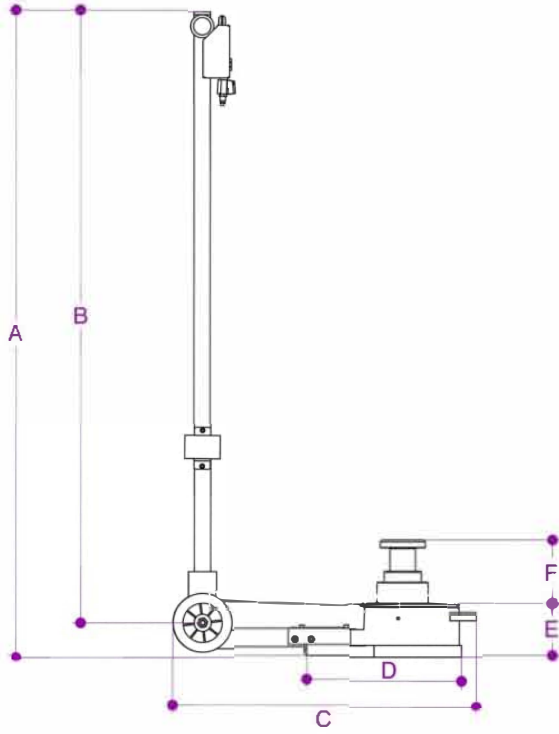

A 54.5 in

B 51.8 in

C 26 in

D 13 in

E 4.7 in

F 5.3 in

G 11.8 in

H 9.8 in