



PERIMETER LIGHTING

SoundOff
Signal ®

PERIMETER LIGHTING

FASCIA LIGHTS



Patented, silicone lens and optic design delivers advantages over conventional polycarbonate lenses

mpower Fascia 3" Light

Features:	First extremely compact, tricolor line of perimeter lighting on the market
LED Color Capabilities:	Single, dual, tricolor
LED Color Options:	●, ●, ●, ●, ○
Number of LEDs Available:	
Single Color	4, 8
Dual Color	8
Tricolor	12
Light Sync:	Up to 24 lightheads (Sync 2)
Flash Patterns:	15
Dimensions(l):	3.04" (7.72 cm)
Dimensions(h):	0.92" (2.3 cm)
Dimensions(d):	0.42" (1 cm)
Mounts:	Quick, screw, stud
Certifications:	SAE J595, SAE J845, CA Title 13, ECE R65, ECE R10
Bezels sold separately, but highly recommended unless recess mounted. See page 31 for bezel and other accessory options.	

3" mpower Fascia Lights

Quick Mount		Stud Mount		Screw Mount	
3"		3"		3"	
4 LED, Single Color	EMPS1QMS1(x)	4 LED, Single Color	EMPS1SLS1(x)	4 LED, Single Color	EMPS1SMS1(x)
8 LED, Single Color	EMPS1QMS3(x)	8 LED, Single Color	EMPS1SLS3(x)	8 LED, Single Color	EMPS1SMS3(x)
8 LED, Dual Color	EMPS1QMS3(y)	8 LED, Dual Color	EMPS1SLS3(y)	8 LED, Dual Color	EMPS1SMS3(y)
12 LED, Tricolor	EMPS1QMS4(z)	12 LED, Tricolor	EMPS1SLS4(z)	12 LED, Tricolor	EMPS1SMS4(z)

Replace (x), (y) or (z) in the Order Number for Standard Color Selection	
Single Colors (x)	A= ● B= ● R= ● W= ○
Dual Colors (y)	D= ●○ E= ●○ F= ●○ H= ●○ J= ●●
Tricolors (z)	RBA= ●●● RBW= ●●○

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

FASCIA LIGHTS



Patented, silicone lens and optic design delivers advantages over conventional polycarbonate lenses

mpower Fascia 4" Light

Features:	First extremely compact, tricolor line of perimeter lighting on the market
LED Color Capabilities:	Single, dual, tricolor
LED Color Options:	●, ●, ●, ●, ○
Number of LEDs Available:	
Single Color	6, 8
Dual Color	12
Tricolor	18
Light Sync:	Up to 24 lightheads (Sync 2)
Flash Patterns:	15
Dimensions(l):	4.04" (10.3 cm)
Dimensions(h):	0.92" (2.3 cm)
Dimensions(d):	0.42" (1 cm)
Mounts:	Quick, screw, stud
Certifications:	SAE J595, SAE J845, CA Title 13, ECE R65, ECE R10
Bezels sold separately, but highly recommended unless recess mounted. See page 31 for bezel and other accessory options.	

4" mpower Fascia Lights

Quick Mount		Stud Mount		Screw Mount	
4"		4"		4"	
6 LED, Single Color	EMPS2QMS2(x)	6 LED, Single Color	EMPS2STS2(x)	6 LED, Single Color	EMPS2SMS2(x)
8 LED, Single Color	EMPS2QMS3(x)	8 LED, Single Color	EMPS2STS3(x)	8 LED, Single Color	EMPS2SMS3(x)
12 LED, Dual Color	EMPS2QMS4(y)	12 LED, Dual Color	EMPS2STS4(y)	12 LED, Dual Color	EMPS2SMS4(y)
18 LED, Tricolor	EMPS2QMS5(z)	18 LED, Tricolor	EMPS2STS5(z)	18 LED, Tricolor	EMPS2SMS5(z)

Replace (x), (y) or (z) in the Order Number for Standard Color Selection	
Single Colors (x)	A= ● B= ● R= ● W= ○
Dual Colors (y)	D= ●○ E= ●○ F= ●○ H= ●○ J= ●●
Tricolors (z)	RBA= ●●● RBW= ●●○

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

FASCIA LIGHTS

mpower[®] HD LIGHT



Patented, silicone lens and optic design delivers advantages over conventional polycarbonate lenses

mpower HD Light

Features:	First extremely compact, tricolor line of perimeter lighting on the market
LED Color Capabilities:	Single, dual, tricolor
LED Color Options:	●, ●, ●, ●, ●, ○
Number of LEDs Available:	
Single Color	6, 8
Dual Color	12
Tricolor	18
Light Sync:	Up to 24 lightheads (Sync 2)
Flash Patterns:	15
Dimensions(l):	4.25" (10.8 cm)
Dimensions(h):	0.92" (2.3 cm)
Dimensions(d):	0.6" (1.5 cm)
Mounts:	Stud
Certifications:	SAE J595, SAE J845, CA Title 13

Bezels sold separately, but highly recommended unless recess mounted. See page 31 for bezel and other accessory options.

mpower HD Light

Stud Mounts

HD	
6 LED, Single Color	EMPS4STS2(x)
8 LED, Single Color	EMPS4STS3(x)
12 LED, Dual Color	EMPS4STS4(y)
18 LED, Tricolor	EMPS4STS5(z)

Replace (x), (y) or (z) in the Order Number for Standard Color Selection

Single Colors (x)	A= ● B= ● R= ● W= ○
Dual Colors (y)	D= ●○ E= ●○ F= ●○ H= ●○ J= ●●
Tricolors (z)	RBA= ●●● RBW= ●●○

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

FASCIA LIGHTS

mpower[®] FASCIA 4X2



Patented, silicone lens and optic design delivers advantages over conventional polycarbonate lenses

mpower 4x2

Features:	First extremely compact, tricolor line of perimeter lighting on the market
LED Color Capabilities:	Single, dual, tricolor
LED Color Options:	●, ●, ●, ●, ●, ○
Number of LEDs Available:	
Single Color	12, 16
Dual Color	24
Tricolor	36
Light Sync:	Up to 24 lightheads (Sync 2)
Flash Patterns:	15
Dimensions(l):	4.07" (10.34 cm)
Dimensions(h):	1.5" (3.8 cm)
Dimensions(d):	0.43" (1.09 cm)
Mounts:	Quick, screw, stud
Certifications:	SAE J595, SAE J845, CA Title 13, ECE R65, ECE R10, NFPA 1901

Bezels sold separately, but highly recommended unless recess mounted. See page 31 for bezel and other accessory options.

mpower 4x2 Lights

Quick Mount

4x2	
12 LED, Single Color	EMPSA05BN-(x)
16 LED, Single Color	EMPSA05BS-(x)
24 LED, Dual Color	EMPSA05BT-(x)
36 LED, Tricolor	EMPSA05BU-(z)

Stud Mount

4x2	
12 LED, Single Color	EMPSA05CO-(x)
16 LED, Single Color	EMPSA05C1-(x)
24 LED, Dual Color	EMPSA05C2-(x)
36 LED, Tricolor	EMPSA05C3-(z)

Screw Mount

4x2	
12 LED, Single Color	EMPSA05BW-(x)
16 LED, Single Color	EMPSA05BX-(x)
24 LED, Dual Color	EMPSA05BY-(x)
36 LED, Tricolor	EMPSA05BZ-(z)

Replace (x), (y) or (z) in the Order Number for Standard Color Selection

Single Colors (x)	A= ● B= ● R= ● W= ○ G= ●
Dual Colors (x)	G= ●○ D= ●○ E= ●○ F= ●○ H= ●○ J= ●●
Tricolors (z)	6= ●●● 8= ●●○

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

ACCESSORIES



Universal Accessories

Brackets:	Quick Clip Mount: Quick Clip Bracket	
	3", black	PMP1BKQCLP
	4", black	PMP2BKQCLP
Stud Mount: 90 Degree Adjustable Bracket	3", black	
	PMP1BKDGAJ	
	3", white	
	PMP1BKDGAJ-W	
	4", black	
	PMP2BKDGAJ	
	4", white	PMP2BKDGAJ-W
	4 x 2, metal	PMPSADGSB
Stud Mount: 90 Degree Adjustable Edge Bracket	3", black	
	PMP1BKEDGE	
	3", white	
	PMP1BKEDGE-W	
	4", black	
	PMP2BKEDGE	
	4", white	PMP2BKEDGE-W
License Plate, Stud Mount	3", vertical mount	
	PMP1BRK2LPV	
	4", vertical mount	
	PMP2BRK2LPV	
Bezels:	Single Bezel, Screw Mount	
	Replace (x) for finish = (B for Black, C for Chrome, P for Primed)	
	3"	PMP1BZLO1(x)
	4"	PMPSABZ01(x)
	4x2	PMPSABZ02(x)
Single Bezel, Stud Mount	HD Light	
	PMP4BZLO1(x)	
Double Bezel, Stud Mount	HD Light	
	PMP4BZLO3(x)	
Double Bezel, Quick Mount	HD Light	
	PMP4BZLO4(x)	

ACCESSORIES



Universal Accessories

Wedges:	Quick Mounts	
Replace (x) for wedge finish = (B for Black, W for White)		
	3", 5 degree	PMP1WDG05(x)
	3", 15 degree	PMP1WDG15(x)
	3", 35 degree	PMP1WDG35(x)
	4", 5 degree	PMP2WDG05(x)
	4", 15 degree	PMP2WDG15(x)
	4", 35 degree	PMP2WDG35(x)
	4 x 2, 5 degree	PMP8WDG(x)01
	4 x 2, 15 degree	PMP8WDG(x)02
	4 x 2, 35 degree	PMP8WDG(x)03
	Includes wedge and 3M VHB adhesive	
Rock Mount:	4", stud mount and HD	
	4", stud mount and HD	PMP4BKRKLB
Windshield Shrouds:	Stud Mounts, Adjustable 25 to 90 Degrees	
	3" narrow, black	PMP1WSS2B
	4", single, black	PMP2WSSSB
	3", dual shroud, black	PMP1WSDDB
	4", dual, black	PMP2WSDDB
	4x2 single, black	PMPSAWSSSB
	4x2 dual, black	PMPSAWSDDB

mpower® THIRD BRAKE LIGHT BEZEL



Add Fascia 4x2 lights to keep your vehicle seen in all environments

Product#: PMPSABK005 (mpower Fascia 4x2's sold separately.)

Features:	Housing mounts seamlessly behind the existing third brake light	
Fitment:	2015-2023 Ford F-15; 2017-2023 Ford Super Duty	
Dimensions:	Without mpower 4x2 lights	With mpower 4x2 lights
Dimensions(l):	31.47" (79.93 cm)	31.47" (79.93 cm)
Dimensions(h):	2.69" (6.83 cm)	2.69" (6.83 cm)
Dimensions(d):	2.85" (7.24 cm)	3.07" (7.8 cm)

PERIMETER LIGHTING

6X4 SILICONE LIGHTS

BEST SELLING

mpower® 6X4

Light Types: Available for use as backup, backup with warning, scene, stop/tail/turn, turn and warning



Warning



Backup w/ Warning



Stop/Tail/Turn

Mount Types



Stud Mount



Quick Mount



Screw Mount

mpower 6x4 Inch Silicone Lights

Features:	Powerful lighting output at 180 degree viewing angles perfect for fire and EMS apparatuses
LED Color Capabilities:	All standard single, dual or split color warning, ● stop/tail, ● turn, ○ backup and ○ backup with single color warning
LED Color Options:	●, ●, ●, ●, ○
Light Sync:	Up to 24 lightheads (Sync 2)
Flash Patterns:	15
Dimensions(l):	6.37" (16.17 cm)
Dimensions(h):	4" (10.16 cm)
Dimensions(d):	1.1" (2.79 cm)
Mounts:	Stud, quick or screw mounts
Certifications:	SAE J595, CA Title 13, NFPA 1901, KKK-1822-F, FMVSS-108

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

6X4 SILICONE LIGHTS

mpower® 6X4

Stud Mounts

Warning	
12 LED, Single Color	EMPSBOC9D-(x)
24 LED, Dual Color	EMPSBOC9E-(y)
24 LED, Split Color	EMPSBOC9F-(y)
36 LED, Tricolor	EMPSBOC9G-(z)
Stop/Tail/Turn	
20 LED, Single Color, ●	EMPSBOC6Y-R
Turn	
20 LED, Single Color, ●	EMPSBOC9K-A
Backup	
18 LED, Single Color, ○	EMPSBOC9H-W
Backup with Warning, White Backup Operation	
28 LED, ● Warning	EMPSBOC9J-F
28 LED, ● Warning	EMPSBOC9J-E
28 LED, ● Warning	EMPSBOC9J-D

Quick Mounts

Warning	
12 LED, Single Color	EMPSBOC91-(x)
24 LED, Dual Color	EMPSBOC8Y-(y)
24 LED, Split Color	EMPSBOC8Z-(y)
36 LED, Tricolor	EMPSBOC90-(z)
Stop/Tail/Turn	
20 LED, Single Color, ●	EMPSBOC94-R
Turn	
20 LED, Single Color, ●	EMPSBOC95-A
Backup	
18 LED, Single Color, ○	EMPSBOC92-W
Backup with Warning, White Backup Operation	
28 LED, ● Warning	EMPSBOC93-F
28 LED, ● Warning	EMPSBOC93-E
28 LED, ● Warning	EMPSBOC93-D

Screw Mounts

Warning	
12 LED, Single Color	EMPSBOC96-(x)
24 LED, Dual Color	EMPSBOC97-(y)
24 LED, Split Color	EMPSBOC98-(y)
36 LED, Tricolor	EMPSBOC99-(z)
Stop/Tail/Turn	
20 LED, Single Color, ●	EMPSBOC9B-R
Turn	
20 LED, Single Color, ●	EMPSBOC9C-A
Backup	
18 LED, Single Color, ○	EMPSBOC92-W
Backup with Warning, White Backup Operation	
28 LED, ● Warning	EMPSBOAWT-F
28 LED, ● Warning	EMPSBOAWT-E
28 LED, ● Warning	EMPSBOAWT-D

Replace (x), (y) and (z) in the Order Number for Standard Color Selection

Single Colors (x)	A= ● B= ● R= ● W= ○
Dual Colors (y)	D= ● ○ E= ● ○ F= ● ○ J= ● ●
Split Colors (y)	D= ● ○ E= ● ○ F= ● ○ J= ● ● K= ● ● M= ● ●
Tricolor (z)	6= ● ● ● 8= ● ● ○

mpower® 6X4 BEZELS

NEW



Heavy-duty, metal housings

mpower® 6x4 Bezels

Replace (x) for bezel finish = (B for Black, C for Chrome)

Single Bezel	PMP7BZL01(x)
Double Bezel	PMP7BZL12(x)
Triple Bezel	PMP7BZL13(x)
Quad Bezel	PMP7BZL14(x)


● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

7X3 SILICONE LIGHTS

mpower® 7X3

Light Types: Available for use as backup, backup with warning, scene, stop/tail/turn, turn and warning

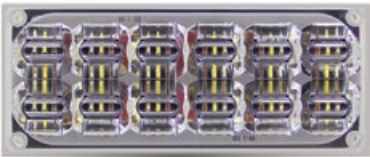

Warning



Backup w/ Warning



Stop/Tail/Turn

Mount Types



Stud Mount



Quick Mount



Screw Mount

mpower® 7x3 Silicone Lights

Features:	Powerful lighting output at 180 degree viewing angles perfect for fire and EMS apparatuses
LED Color Capabilities:	All standard single, dual or split color warning, ● stop/tail, ● turn, ○ backup and ○ backup with single color warning
LED Color Options:	●, ●, ●, ●, ○
Light Sync:	Up to 24 lighthead (Sync 2)
Flash Patterns:	15 warning, backup with warning. 4 turn. 1 stop/tail
Dimensions(l):	7.18" (18.54 cm)
Dimensions(h):	3" (7.62 cm)
Dimensions(d):	1" (2.54 cm) (without bezel)
Mounts:	Stud, quick or screw mounts
Certifications:	SAE J595, CA Title 13, NFPA 1901, KKK-1822-F, FMVSS-108



mpower® 7X3 BEZELS



Heavy-duty, metal housings

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

mpower® 7x3 Bezels

Replace (x) for bezel finish = (B for Black, C for Chrome)

Single Bezel	PMP8BZL01(x)
Double Bezel w/ 15 Degree Tilt	PMP8BZL32(x)
Double Bezel	PMP8BZL12(x)
Triple Bezel	PMP8BZL13(x)
Quad Bezel	PMP8BZL14(x)

7X3 SILICONE LIGHTS

mpower® 7X3

Stud Mounts

Warning	
12 LED, Single Color	EMPSC07MH-(x)
24 LED, Dual Color	EMPSC07MJ-(y)
24 LED, Split Color	EMPSC07MK-(y)
36 LED, Tricolor	EMPSC07ML-(z)
Stop/Tail/Turn	
18 LED, Single Color, ●	EMPSC07MP-R
Turn	
18 LED, Single Color, ●	EMPSC07MQ-A
Backup	
18 LED, Single Color, ○	EMPSC07MM-W
Backup with Warning (white warning)	
28 LED, ● Warning and ○ Backup Operation	EMPSC07MN-F
28 LED, ● Warning and ○ Backup Operation	EMPSC07MN-E
28 LED, ● Warning and ○ Backup Operation	EMPSC07MN-D

Quick Mounts

Warning	
12 LED, Single Color	EMPSC07M0-(x)
24 LED, Dual Color	EMPSC07M1-(y)
24 LED, Split Color	EMPSC07M2-(y)
36 LED, Tricolor	EMPSC07M3-(z)
Stop/Tail/Turn	
18 LED, Single Color, ●	EMPSC07M6-R
Turn	
18 LED, Single Color, ●	EMPSC07M7-A
Backup	
18 LED, Single Color, ○	EMPSC07M4-W
Backup With Warning (white warning)	
28 LED, ● Warning and ○ Backup Operation	EMPSC07M5-F
28 LED, ● Warning and ○ Backup Operation	EMPSC07M5-E
28 LED, ● Warning and ○ Backup Operation	EMPSC07M5-D

Screw Mounts

Warning	
12 LED, Single Color	EMPSC07M8-(x)
24 LED, Dual Color	EMPSC07M9-(y)
24 LED, Split Color	EMPSC07MA-(y)
36 LED, Tricolor	EMPSC07MB-(z)
Stop/Tail/Turn	
18 LED, Single Color, ●	EMPSC07ME-R
Turn	
18 LED, Single Color, ●	EMPSC07MF-A
Backup	
18 LED, Single Color, ○	EMPSC07MC-W
Backup With Warning (white warning)	
28 LED, ● Warning with ○ Backup Operation	EMPSC07MD-F
28 LED, ● Warning with ○ Backup Operation	EMPSC07MD-E
28 LED, ● Warning with ○ Backup Operation	EMPSC07MD-D

Replace (x), (y) and (z) in the Order Number for Standard Color Selection

Single Colors (x)	A= ● B= ● R= ● W= ○
Dual Colors (y)	D= ● ○ E= ● ○ F= ● ○ J= ● ●
Split Colors (y)	D= ● ○ E= ● ○ F= ● ○ J= ● ● K= ● ● M= ● ●
Tricolor	6= ● ● ● 8= ● ● ○

Also Available!



mpower® 9X7

Visit soundoffsignal.com or contact your sales representative for more information on this light.

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

P-SERIES LIGHTS

6X4 P

Light Types: Available for use as backup, backup with warning, scene, stop/tail/turn, turn and warning



Backup & Warning

Dual or Split Warning

Stop/Tail/Turn



Lens Color Options

6x4 P	
Features:	Powerful lighting output, extremely functional and customizable to get the job done
LED Color Capabilities:	All standard single, dual or split color warning, stop/tail, turn, backup and backup with single color warning
LED Color Options:	Yellow, Blue, Green, Red, White
Lens Color Options:	White, Blue, Red, Yellow, Green
Light Sync:	Up to 24 lightheads (Sync 2)
Flash Patterns:	15
Dimensions(l):	6.4" (16.25 cm)
Dimensions(h):	3.9" (9.9 cm)
Dimensions(d):	1.0" (2.54 cm)
Mounting:	Stud or screw mounts
Certifications:	SAE J595, CA Title 13, NFPA 1901, KKK-1822-F, FMVSS-108

Yellow, Blue, Green, Red, White To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

P-SERIES LIGHTS

6X4 P

Stud Mounts	
Warning	
12 LED Single Color (x = A, B, G, R, W) Warning, White Lens	EPSSBQJXA-(x)
12 LED Single Color Yellow Warning, Yellow Lens	EPSSBQJXB-A
12 LED Single Color Blue Warning, Blue Lens	EPSSBQJXC-B
12 LED Single Color Green Warning, Green Lens	EPSSBQJXD-G
12 LED Single Color Red Warning, Red Lens	EPSSBQJXE-R
24 LED Dual Color, White Lens	EPSSBOTFD-(y)
24 LED Split Color, White Lens	EPSSBOTFE-(y)
Stop/Tail/Turn	
20 LED Red STT, White Lens	EPSSBQJXG-R
20 LED Red STT, Red Lens	EPSSBQJXH-R
Turn	
20 LED Yellow Turn, White Lens	EPSSBQJXJ-A
20 LED Yellow Turn, Yellow Lens	EPSSBQJXK-A
Backup	
18 LED White Backup, White Lens	EPSSBQJXF-W
Backup with Warning:	
28 LED White Backup, Red Warning	EPSSBOQFU-D
28 LED White Backup, Blue Warning	EPSSBOQFU-E
28 LED White Backup, Yellow Warning	EPSSBOQFU-F
Screw Mounts	
Warning	
12 LED Single Color (x = A, B, G, R, W) Warning, White Lens	EPSSBQJWZ-(x)
12 LED Single Color Yellow Warning, Yellow Lens	EPSSBQJX1-A
12 LED Single Color Blue Warning, Blue Lens	EPSSBQJX2-B
12 LED Single Color Green Warning, Green Lens	EPSSBQJX3-G
12 LED Single Color Red Warning, Red Lens	EPSSBQJX4-R
24 LED Dual Color, White Lens	EPSSBOTFB-(y)
24 LED Split Color, White Lens	EPSSBOTFC-(y)
Stop/Tail/Turn	
20 LED Red STT, White Lens	EPSSBQJX6-R
20 LED Red STT, Red Lens	EPSSBQJX7-R
Turn	
20 LED Yellow Turn, White Lens	EPSSBQJX8-A
20 LED Yellow Turn, Yellow Lens	EPSSBQJX9-A
Backup	
18 LED White Backup, White Lens	EPSSBQJX5-W
Backup with Warning:	
28 LED White Backup, Red Warning	EPSSBOPQO-D
28 LED White Backup, Blue Warning	EPSSBOPQO-E
28 LED White Backup, Yellow Warning	EPSSBOPQO-F

Replace (x) and (y) in the Order Number for Standard Color Selection	
Single Colors (x)	A= Yellow B= Blue G= Green R= Red W= White
Dual Colors (y)	D= Red/White E= Blue/White F= Yellow/White J= Red/Blue
Split Colors (y)	D= Red/White E= Blue/White F= Yellow/White J= Red/Blue K= Yellow/Red M= Yellow/Blue

6X4 P BEZELS



Heavy-duty, metal housings

6x4 P Bezels	
Replace (x) for bezel finish = (B for Black, C for Chrome)	
Single Bezel	PPS7BZL01(x)
Double Bezel	PPS7BZL12(x)
Triple Bezel	PPS7BZL13(x)
Quad Bezel	PPS7BZL14(x)

Yellow, Blue, Green, Red, White To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

P-SERIES LIGHTS

7X3 P

Light Types: Available for use as backup, backup with warning, scene, stop/tail/turn, turn and warning



Backup & Warning

Dual or Split Warning

Stop/Tail/Turn



Lens Color Options

7x3 P	
Features:	Powerful lighting output, extremely functional and customizable to get the job done
LED Color Capabilities:	All standard single, dual or split color warning, stop/tail, turn, backup and backup with single color warning
LED Color Options:	Warning, Backup, Turn, Stop/Tail, Split
Lens Color Options:	Red, Blue, White, Green, Yellow
Light Sync:	Up to 24 lightheads (Sync 2)
Flash Patterns:	15
Dimensions(l):	7.25" (18.41 cm)
Dimensions(h):	3.1" (7.87 cm)
Dimensions(d):	1.0" (2.54 cm)
Mounting:	Stud or screw mounts
Certifications:	SAE J595, CA Title 13, NFPA 1901, KKK-1822-F, FMVSS-108

To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

P-SERIES LIGHTS

7X3 P

Stud Mounts	
Warning	
12 LED Single Color, Lens	EPSSCQJXS-(x)
12 LED Single Color Warning, Lens	EPSSCQJXU-A
12 LED Single Color Warning, Lens	EPSSCQJXV-B
12 LED Single Color Warning, Lens	EPSSCQJXX-G
12 LED Single Color Warning, Lens	EPSSCQJXY-R
24 LED Dual Color, Lens	EPSSCOTFN-(y)
24 LED Split Color, Lens	EPSSCOTFP-(y)
Stop/Tail/Turn	
18 LED STT, Lens	EPSSCQJYO-R
18 LED STT, Lens	EPSSCQJY1-R
Turn	
18 LED Turn, Lens	EPSSCQJY2-A
18 LED Turn, Lens	EPSSCQJY3-A
Backup	
18 LED Backup, Lens	EPSSCQJXZ-W
Backup with Warning	
28 LED Backup, Warning	EPSSCQQFW-D
28 LED Backup, Warning	EPSSCQQFW-E
28 LED Backup, Warning	EPSSCQQFW-F
Screw Mounts	
Warning	
12 LED Single Color, Lens	EPSSCQJY4-(x)
12 LED Single Color Warning, Lens	EPSSCQJY5-A
12 LED Single Color Warning, Lens	EPSSCQJY6-B
12 LED Single Color Warning, Lens	EPSSCQJY7-G
12 LED Single Color Warning, Lens	EPSSCQJY8-R
24 LED Dual Color, Lens	EPSSCOTFL-(y)
24 LED Split Color, Lens	EPSSCOTFM-(y)
Stop/Tail/Turn	
18 LED STT, Lens	EPSSCQJYB-R
18 LED STT, Lens	EPSSCQJYC-R
Turn	
18 LED Turn, Lens	EPSSCQJYD-A
18 LED Turn, Lens	EPSSCQJYE-A
Backup	
18 LED Backup, Lens	EPSSCQJYA-W
Backup with Warning	
28 LED Backup, Warning	EPSSCOPPZ-D
28 LED Backup, Warning	EPSSCOPPZ-E
28 LED Backup, Warning	EPSSCOPPZ-F

Replace (x) and (y) in the Order Number for Standard Color Selection	
Single Colors (x)	A= Warning B= Backup G= Turn R= Stop/Tail W= Split
Dual Colors (y)	D= Red E= Blue F= Green J= Yellow
Split Colors (y)	D= Red E= Blue F= Green J= Yellow K= White M= Amber



Heavy-duty, metal housings

7X3 P BEZELS



7x3 P Bezels	
Replace (x) for bezel finish = (B for Black, C for Chrome)	
Single Bezel	PPS8BZL01(x)
Double Bezel	PPS8BZL12(x)
Triple Bezel	PPS8BZL13(x)
Quad Bezel	PPS8BZL14(x)

To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

P-SERIES LIGHTS



9X7 P

Light Types: Available for use as scene and warning



Backup & Warning

Standard, cost-effective light to complete your apparatus build

9x7 P

Features: Versatile and simple to install with industry standard bolt patterns.

LED Color Capabilities:	Single
LED Color Options:	●, ●, ●, ●, ○
Lens Color Options:	○, ●, ●, ●, ●
Light Sync:	Up to 24 lightheads (Sync 2)
Flash Patterns:	15
Dimensions(l):	9" (22.86 cm)
Dimensions(h):	7" (17.78 cm)
Dimensions(d):	1" (2.54 cm)
Mounting:	Stud or screw mounts
Certifications:	SAE J595, CA Title 13, NFPA 1901, KKK-1822-F

Stud Mounts

Single Color Warning		Single Color Warning	
36 LED Single Color (x = A, B, G, R, W), ○ Lens	EPSSEOTF5-{x}	36 LED Single Color (x = A, B, G, R, W), ○ Lens	EPSSEOTF0-{x}
36 LED Single Color ●, ● Lens	EPSSEOTF6-A	36 LED Single Color ●, ● Lens	EPSSEOTF1-{x}
36 LED Single Color ●, ● Lens	EPSSEOTF7-B	36 LED Single Color ●, ● Lens	EPSSEOTF2-{x}
36 LED Single Color ●, ● Lens	EPSSEOTF8-G	36 LED Single Color ●, ● Lens	EPSSEOTF3-{x}
36 LED Single Color ●, ● Lens	EPSSEOTF9-R	36 LED Single Color ●, ● Lens	EPSSEOTF4-{x}

Replace {x} in the Order Number for Standard Color Selection

Single Colors {x} A= ● B= ● G= ● R= ● W= ○



9X7 P BEZELS

9x7 P Bezels

Replace {x} for bezel finish = (B for Black, C for Chrome)

Single Bezel	PPS9BZL01{x}
--------------	--------------

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

RUNNING LIGHTS

SL RUNNING LIGHT



Extremely versatile solution bringing added intersection safety

SL Running Light

Feature:	Can be used for rocker panels, push bumpers, tailgates, headache racks, brow lights and more
LED Color Options:	●, ●, ●, ●, ○
Flash Patterns:	Up to 69 flash patterns
Dimensions(l):	15" (38.1 cm), 50" (127 cm), 61.4" (15.6 cm), 72.8" (184.9 cm)
Dimensions(h):	1.09" (2.76 cm) (all lengths)
Dimensions(d):	0.75" (1.9 cm) (all lengths)
Mount:	Bracket mount, brackets sold separately
Certifications:	SAE J595, CA Title 13

15" Model (1 module)

Dual color, ● ○	ESLRL1501F
Dual color, ● ○	ESLRL1501E
Dual color, ● ○	ESLRL1501D
Dual color, ● ●	ESLRL1501J
Tricolor, ● ● ○	ESLRL15018

61.4" Model (5 modules)

Dual color, ● ○	ESLRL6105F
Dual color, ● ○	ESLRL6105E
Dual color, ● ○	ESLRL6105D
Dual color, ● ●	ESLRL6105J
Tricolor, ● ● ○	ESLRL61058

72.8" Model (6 modules)

Dual color, ● ○	ESLRL7306F
Dual color, ● ○	ESLRL7306E
Dual color, ● ○	ESLRL7306D
Dual color, ● ●	ESLRL7306J
Tricolor, ● ● ○	ESLRL73068

Additional color and length configurations are available with an extended lead time. Please contact your sales rep to learn more.

Many vehicle-specific solutions available!



Vehicles supported:

- Chevrolet Tahoe
- Ford Police Interceptor Utility
- Dodge Durango
- And more...

Visit soundoffsignal.com to configure the product to your specific vehicle or contact your sales representative.

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

SURFACE, DECK/GRILLE MOUNTS



nFORCE® SURFACE MOUNT LIGHT



nFORCE FIT LED Surface Mount Light

Features:	Intense forward and off-angle illumination.
LED Color Capabilities:	Single, dual, split, tricolor
LED Color Options:	●, ●, ●, ●, ○
Flash Patterns:	12 single, 14 dual, 14 tricolor patterns
Dimensions:	Surface Mount, Single
Dimensions(l):	5.0" (12.7 cm)
Dimensions(h):	1.72" (4.3 cm)
Dimensions(d):	1.50" (3.8 cm)
Mounting:	Screw mount
Certifications:	SAE J595, CA Title 13, EMC 72/245/EEC, ECE R10

Single	
6 LED, Single or Split Colors	ENFSSS1(x)
9 LED, Single Color	ENFSSS2(x)
12 LED, Single or Dual Colors	ENFSSS3(x)
18 LED, Tricolor	ENFSSS4(z)

nFORCE® DECK/GRILLE LIGHT



nFORCE Deck/Grille Mounts

Features:	Intense forward and off-angle illumination	
LED Color Capabilities:	Single, dual, tricolor	
LED Color Options:	●, ●, ●, ●, ○	
Flash Patterns:	12 single color and 14 dual/tricolor	
Dimensions:	Deck/Grille Mount, Single	Deck/Grille Mount, Dual Side-by-Side
Dimensions(l):	5.0" (12.7 cm)	9.50" (24.1 cm)
Dimensions(h):	1.88" (4.7 cm)	1.88" (4.7 cm)
Dimensions(d):	1.82 (4.3 cm)	1.82" (4.3 cm)
Mounting:	Deck/grille mount	
Certifications:	SAE J595, SAE J845, CA Title 13, ECE R10, EMC 72/245/EEC	

Deck/Grille Mounts

Single		Dual Side-by-Side	
6 LED, Single or Split Colors	ENFSGS1(x)	6 LED, Single or Split Colors	ENFDGS1(x)(x)
9 LED, Single Color	ENFSGS2(x)	9 LED, Single Color	ENFDGS2(x)(x)
12 LED, Single or Dual Colors	ENFSGS3(x or y)	12 LED, Single or Dual Colors	ENFDGS3(x)(x) or (JJ)
18 LED, Tricolor	ENFSGS4(z)	18 LED, Tricolor	ENFDGS4(z)

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

RECESS MOUNTS

nFORCE® RECESS MOUNT



nFORCE® OVAL RECESS



nFORCE LED Recess Mount Light / nFORCE 6" Oval Recess Mount Light

Features:	Intense forward and off-angle illumination.	
LED Color Capabilities:	Single, dual, split, tricolor	
LED Color Options:	●, ●, ●, ●, ○	
Flash Patterns:	12 single, 14 dual, 14 tricolor patterns	
Dimensions:	Recess Mount	Oval Recess Mount Light
Dimensions(l):	5.25" (13.34 cm)	7.75" (19.69 cm)
Dimensions(h):	2.25" (5.72 cm)	3.25" (8.26 cm)
Dimensions(d):	1.50" (3.8 cm)	1.65" (4.19 cm)
Mounting:	Recess mount	
Certifications:	SAE J595, CA Title 13, EMC 72/245/EEC, NFPA 1901	

Recess Mounts

Recess		6 Inch Oval	
6 LED, Single or Split Colors	ENFSRS1(x)	6 LED, Single or Split Colors	ENFSRV1(x)
9 LED, Single Color	ENFSRS2(x)	9 LED, Single Color	ENFSRV2(x)
12 LED, Single or Dual Colors	ENFSRS3(x) or (y)	12 LED, Single or Dual Colors	ENFSRV3(x) or (y)
18 LED, Tricolor	ENFSRS4(z)		

nFORCE Universal Accessories

License Plate	Surface vertical mount	PNFSLBRK2LPV
90 Degree Angle	Surface horizontal mount	PNFSLBRK190
Deck/Grille Mount	Single	PNFSLDGSB
	Dual	PNFSLDGDB

Replace (x), (y) or (z) in the Order Number for Standard Color Selection

6, 9, 12 LED Single Colors (x)	A= ● B= ● R= ● W= ○	6 Inch Oval Recess Mount	A= ● W= ○
6 LED Split Color (x)	D= ●○ E= ●○ F= ●○ J= ●●	6 Inch Oval Recess Mount	D= ●○ F= ●○
12 LED Dual Colors (y)	D= ●○ E= ●○ F= ●○ J= ●●	6 Inch Oval Recess Mount	D= ●○ F= ●○
18 LED Tricolors (z)	BRA= ●●● BRW= ●●○	6 Inch Oval Recess Mount	Not available

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING



WINDSHIELD MOUNTS

nFORCE® WINDSHIELD LIGHT



nFORCE Single Mount, nFORCE Dual Side-by-Side

Features:	Intense forward and off-angle illumination	
LED Color Capabilities:	Single, split, dual or tricolor capability (tricolor is not available for the 6 inch oval recess mount)	
LED Color Options:	●, ●, ●, ●, ○	
Light Sync	Up to 24 lightheads (Sync 2)	
Flash Patterns:	12 single, 14 dual or 14 tricolor patterns (tricolor is not available for the 6 inch oval recess mount)	
Dimensions:	Windshield Mount, Single	Windshield Mount, Dual Side-by-Side
Dimensions(l):	6.80" (17.27cm)	11.35" (28.8 cm)
Dimensions(h):	1.43" (3.6 cm)	1.43" (3.6 cm)
Dimensions(d):	1.43" (3.6 cm)	5" (12.7 cm)
Mounting:	Windshield	
Certifications:	SAE J595, CA Title 13, EMC 72/245/EEC	

Windshield Mounts

Single, Stacked Mount Includes shroud, bracket and bare wires		Dual Side-by-Side, Permanent Mount Includes shroud, bracket and bare wires	
6 LED, Single or Dual Colors	ENFSWP1(x)	6 LED, Single or Dual Colors	ENFDWP1(y)
9 LED, Single Color	ENFSWP2(x)	9 LED, Single Color	ENFDWP2(y)
12 LED, Single or Dual Colors	ENFSWP3(x)	12 LED, Single or Dual Colors	ENFDWP3(y)
18 LED, Tricolor	ENFSWP4(z)	18 LED, Tricolor	ENFDWP4(z)
Single, Suction Cup Mount Includes shroud, bracket and 12 volt cigar plug with 11.5' cord		Dual Side-by-Side, Suction Cup Mount Includes shroud, bracket and 12 volt cigar plug with 11.5' cord	
6 LED, Single or Split Colors	ENFSWS1(x) or (y)	6 LED, Single or Dual Colors	ENFDWS1(x) or (y)
9 LED, Single Color	ENFSWS2(x)	9 LED, Single Color	ENFDWS2(x)
12 LED, Single or Dual Colors	ENFSWS3(x) or (y)	12 LED, Single or Dual Colors	ENFDWS3(x) or (y)
18 LED, Tricolor	ENFSWS4(z)	18 LED, Tricolor	ENFDWS4(z)

Replace (x), (y) or (z) in the Order Number for Standard Color Selection

6, 9, 12 LED Single Colors (x)	A= ● B= ● R= ● W= ○
6 LED Split Color (y)	D= ●○ E= ●○ F= ●○ J= ●●
12 LED Dual Colors (y)	D= ●○ E= ●○ F= ●○ J= ●●
18 LED Tricolors (z)	BRA= ●●● BRW= ●●○

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

UNDER MIRROR & SURFACE MOUNT LIGHTS

INTERSECTOR UNDER MIRROR INTERSECTOR SURFACE MOUNT



Under Mirror Mount

Features:	Emergency vehicle must-have—mounts under the vehicle's side mirror	
Light Sync:	Up to 24 lightheads (Sync 2)	
Flash Patterns:	12 single, 14 dual or 14 tricolor	
Dimensions:	Under Mirror	Surface Mount
Dimensions(l):	2.78" (7.06 cm)	3.15" (8.0 cm)
Dimensions(h):	1.04" (2.64 cm)	1.45" (3.68 cm)
Dimensions(d):	2.49" (6.32 cm)	1.68" (4.27 cm)
Mounting:	Under mirror or surface mount	
Certifications:	SAE J845, ECE R10.05	

Surface Mount

Features:	No other light offers 180 degree output - specially designed reflector amplifies and throws the light at the perfect angle to increase visibility at intersections
-----------	--

Under Mirror Mount

8 LED, Single Color	ENT2B3(x)
16 LED, Dual Color	ENT2B3(y)
18 LED, Tricolor	ENT2B3(z)

Surface Mount

8 LED, Single Color, Black Housing	ENT3B3(x)
8 LED, Single Color, Chrome Housing	ENT3C3(x)
8 LED, Single Color, White Housing	ENT3W3(x)
16 LED, Dual Color, Black Housing	ENT3B3(y)
16 LED, Dual Color, Chrome Housing	ENT3C3(y)
16 LED, Dual Color, White Housing	ENT3W3(y)
18 LED, Tricolor, Black Housing	ENT3B3(z)
18 LED, Tricolor, Chrome Housing	ENT3C3(z)
18 LED, Tricolor, White Housing	ENT3W3(z)

Replace (x), (y) or (z) in the Order Number for Standard Color Selection

8 LED Single Colors (x)	A= ● B= ● G= ● R= ● W= ○
16 LED Dual Color (y)	D= ●○ E= ●○ F= ●○ H= ●○ J= ●● K= ●● L= ●● M= ●● N= ●● P= ●●
18 LED Tricolors (z)	BAG= ●●● BAW= ●●○ BGW= ●●○ GAW= ●●○ RAG= ●●● RAW= ●●○ RBA= ●●● RBW= ●●○ RBG= ●●● RGW= ●●○

Intersector Universal Accessories

Under Mirror	Installation Mount (includes bracket and screws)	PNT1VRRRT
Surface Adaptors	Under Mirror, Curved (sold in pairs)	PNT1CRV01

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

FLUSH AND SURFACE MOUNT LIGHTS



XF FLUSH MOUNT LIGHT



XF Flush Mount Light

Single Colors	EXFS10001-(x)
Dual Colors	EXFS10002-(y)
Features:	Low profile design with advanced LED output
Light Sync:	Up to 24 lightheads (Sync 2)
Dimensions(l):	1.6" (4.06 cm)
Dimensions(h):	1.51" (3.84 cm)
Dimensions(d):	1.54" (3.91 cm)
Certifications:	SAE J595, ECE R65, ECE R10, CA Title 13, CISPR25

Replace (x) or (y) in the Order Number for Standard Color Selection

Single Colors (x)	A= ● B= ● R= ● W= ○
Dual Colors (y)	D= ●○ E= ●○ F= ●○ J= ●● K= ●● M= ●● P= ●●

BOLT 2



Bolt 2

Single Color	E1XS2SME5(x)X
Dual Colors	E1XS2SME5(y)
Features:	Bright, high-performing light in compact, versatile design
Flash Patterns:	8
Mounts:	Surface Mount, 90°
Dimensions(l):	15.5" (14 cm)
Dimensions(h):	5.5" (14 cm)
Dimensions(d):	0.48" (12.2 cm)
Certifications:	SAE J595, CA title 13, ECE R65, ECE R10, NFPA 1901

Replace (x) or (y) in the Order Number for Standard Color Selection

Single Colors (x)	A= ● B= ● R= ● W= ○ G= ●
Dual Colors (y)	AW= ●○ BA= ●● BW= ●○ GA= ●● RA= ●● RB= ●● RW= ●○

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

FLUSH AND SURFACE MOUNT LIGHTS

GHOST® SURFACE MOUNT LIGHT



Single Surface Mount

Features:	Bright, high-performing light in compact, versatile design
Number of LEDs:	6
Light Sync:	Up to 4 lightheads (Sync 1)
Flash Patterns:	33
Dimensions(l):	5.65" (14.35 cm)
Dimensions(h):	1.06" (2.6924 cm)
Dimensions(d):	1.8" (4.57 cm)
Mounts:	Surface
Certifications:	SAE J595, SAE 845, CA Title 13, EMC 72/245/EEC, ECE R65

Single

Single LED color, Black Housing, 10-30 Vdc	EGHST2(x)
--	-----------

Split Color

Split LED Color, Black Housing	EGHST2(y)
--------------------------------	-----------

Single Stop/Tail

Single LED Color ●, Stop/Tail, Black Housing	EGHSTT2BB
Single LED Color ●, Stop/Tail, White Housing	EGHSTT2BW
Single LED Color ●, Stop/Tail, Black Housing	EGHSTT2RB
Single LED Color ●, Stop/Tail, White Housing	EGHSTT2RW

Replace (x) or (y) in the Order Number for Standard Color Selection

Single Colors (x)	A= ● B= ● G= ● R= ● W= ○
Split Colors (y)	D= ●○ E= ●○ F= ●○ H= ●○ J= ●● K= ●● L= ●● M= ●● N= ●● P= ●●

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

MULTI-MOUNT LIGHTS

GHOST® MULTI-MOUNT LIGHT



Ghost Multi-Mount Light

Features:	Discrete and versatile – can be used on cars, trucks, SUVs, buses, trailers and more
LED Color Capabilities:	Single, Dual
LED Color Options:	●, ●, ●, ●, ●, ○
Number of LEDs:	6
Light Sync:	Up to 4 lightheads (Sync 1)
Flash Patterns:	33
Dimensions(l):	4.0" (10.16 cm)
Dimensions(h):	0.88" (2.24 cm)
Dimensions(d):	1.75" (4.45 cm)
Mounts:	Multi-Mount (Edge Mount, Permanent Mount & 3M Super Duty Adhesive Mount)
Certifications:	SAE J595, SAE J845, CA Title 13, EMC 72/245/EEC, ECE R65

Multi-Mount

Single LED, Black Housing	EGHST1(x)
Dual LED, Black Housing	EGHST1(y)

3M Super Duty Adhesive Mount

Single LED ●, Stop/Tail Light, Black Housing	EGHSTTA
Single LED ●, Stop/Tail Light, Black Housing	EGHSTTR
Single LED ○, Stop/Tail Light, Black Housing	EGHSTTW

Replace (x) or (y) in the Order Number for Standard Color Selection

Single Colors (x)	A= ● B= ● G= ● R= ● W= ○
Dual Colors (y)	D= ●○ E= ●○ F= ●○ H= ●○ J= ●● K= ●● L= ●● M= ●● N= ●● P= ●●

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

LED INSERT

UNIVERSAL UNDERCOVER LED INSERT



Universal UnderCover LED Insert

With 10 feet cable length:	ELUC3H010(x)	
With 25 feet cable length:	ELUC3H025(x)	
Features:	Features separate color control capability	
LED Color Capabilities:	Single, dual	
LED Color Options:	●, ●, ●, ●, ●, ○	
Light Sync:	Up to 24 lightheads (Sync 2)	
Flash Patterns:	12 single color or 14 dual color	
Dimensions:	Insert	Bezel
Dimensions(l):	2.2" (5.6 cm)	2.2" (5.6 cm)
Dimensions(d):	0.9" (2.3 cm)	1.65" (4.2 cm)
Dimensions(dia.):	1.5" (3.8 cm)	2.2" (5.6 cm)
Mounting:	Headlight and taillight mounts into 1" diameter cutout, Screw-in surface mount with optional bezel, Bezel mounts on 1.89" (4.8 cm) centers, Twist-in or push-in options are also available	

Universal UnderCover LED Insert Accessories

Surface Mount Bezels	Black (includes mounting gasket and hardware)	PLUC2HSB
	Chrome (includes mounting gasket and hardware)	PLUC2HSC
	White (includes mounting gasket and hardware)	PLUC2HSW
Lens	Extreme angle	PLUC2LN1E
	Horizontal	PLUC2LN1H
	Vertical	PLUC2LN1V

● ● ● ● ○ To configure product to your exact needs, visit soundoffsignal.com or contact customer service.

PERIMETER LIGHTING

WARNING LIGHTS

OVAL WARNING LIGHT



Oval Warning Light

Features:	Collimating lens design concentrates light into an intensified pattern of light – no dark spots or voids in light output
Flash Patterns:	8
Dimensions(l):	6.4" (16 cm)
Dimensions(h):	2.2" (0.6 cm)
Dimensions(d):	1.5" (0.4 cm)
Mounting:	Recess Mounting

Recess Mounting

6", Oval	
● LEDs/o Lens	EOVREBZA
● LEDs/o Lens	EOVREBZG
Certifications:	SAE J595

Warning Marker - Universal Accessory

Dress Ring:	Recess, 6 inch oval chrome	ECV06CHRM
-------------	----------------------------	-----------

ROUND WARNING LIGHT



Round Warning Light

Features:	Intense pattern of light with no dark spots.
Flash Patterns:	8
Dimensions(l):	4" (10.16 cm)
Dimensions(h):	4" (10.16 cm)
Dimensions(d):	1.5" (3.81 cm)
Mounting:	Recess Mounting

Recess

4", Round	
● LEDs/o Lens	ERDREBZA
● LEDs/o Lens	ERDREBZG
Certifications:	SAE J595

VEHICLE SPECIFIC ACCESSORIES

VEHICLE SPECIFIC ACCESSORIES



Many Vehicle-specific Solutions Available!



We offer a long list of accessories for several vehicle types (Chevrolet Tahoe, Ford Police Interceptor Utility, Dodge Durango, etc.). Common vehicle-specific solutions include:

- Hook kits for exterior lightbars
- Interior lightbars
- Speaker brackets
- Mirror mounts
- Rear spoiler brackets
- Grille brackets

To see a full listing visit SoundOff Signal's website.

PERIMETER LIGHTING

PERFORMANCE WHITE LIGHTING

PERFORMANCE LIGHTING



- Unique hybrid spot/driving beam pattern
- Great resistance to gravel pitting, scratching or cracking
- UV and thermal stability to prevent lens from yellowing

mpower® silicone LED lights are literally built for the rocks, dirt or whatever else you might stir up on your next job or adventure. With their optic-grade shatterproof silicone lenses, these lights won't break, scratch, crack or yellow from the sun.

mpower 2X1



mpower 2x1	
Without vehicle harness:	RTL-EMPR10033-VVV
With vehicle harness:	RTL-EMPR10038-VVV
Features:	Shatterproof silicone lens. Never cracks, never chips, resists fading or yellowing.
LED Color Options:	○
Beam Pattern:	Hybrid 10 degree spot/flood beam pattern
Dimensions(l):	2.61" (6.6 cm)
Dimensions(h):	1.2" (3.0 cm)
Dimensions(d):	3.23" (8.2 cm)

PERFORMANCE WHITE LIGHTING

mpower 2X1 DUAL STACKED KIT



mpower 2x1 Dual Stacked	
Without vehicle harness:	RTL-EMPR10034-VVV
With vehicle harness:	RTL-EMPR10039-VVV
Features:	Shatterproof silicone lens. Never cracks, never chips, resists fading or yellowing.
LED Color Options:	○
Beam Pattern:	Hybrid 10 degree spot/flood beam pattern
Dimensions(l):	2.61" (6.6 cm)
Dimensions(h):	2.33" (5.9 cm)
Dimensions(d):	3.23" (8.2 cm)

mpower 6X1



mpower 6x1	
Without vehicle harness:	RTL-EMPR20036-VVV
With vehicle harness:	RTL-EMPR20040-VVV
Features:	Shatterproof silicone lens. Never cracks, never chips, resists fading or yellowing.
LED Color Options:	○
Beam Pattern:	Hybrid 10 degree spot/flood beam pattern
Dimensions(l):	6.64" (16.9 cm)
Dimensions(h):	1.2" (3.0 cm)
Dimensions(d):	3.48" (8.8 cm)

FREIGHT NOT
INCLUDED IN
PRICE OF UNIT.
FREIGHT WILL
BE BILLED UPON
PURCHASE.