

DXT



ROLL OUT THE HEAVY HITTERS

Extreme conditions demand cutting-edge innovation. The durable, fully featured BOSS DXTs are the ultimate tools to fight all things snow and ice. The DXT combines both trip-edge and full moldboard trip technologies for high and low trip protection when striking hidden obstacles like frozen snowbanks, manhole covers and curbs. Flared wings with enhanced curl throw snow with maximum efficiency and the DXT's multi-position plow blade can quickly and easily switch positions to move large amounts of snow.

STANDARD FEATURES

- **Patented Dual-Trip Design** combines trip-edge and full moldboard trip technologies, enhancing plow protection when striking hidden obstacles no matter your plow's position.
- **SmartLight™ 3 LED Headlight System** uses DOT-compliant 100% LED lights and Ice Shield Technology™ to prevent snow and ice build-up.
- **½" x 6" Long-Lasting, Durable Base Angle** provides extended wear resistance with built-in curb guards and patented snow catcher. The base angle serves as the plow's cutting edge until a certain wear point.
- **Optimized Hydraulics** streamline function and reliability of V-plows using fewer valves and hoses and fewer cycles on your electrical system.
- **Patented Snow Catcher** catches snow at the plow's pivot point, so no snow lines are left behind.
- **Reinforced Moldboard** increases blade rigidity for increased durability.
- **Heavy-Duty Push Frame and Center Section** provide additional strength and reliability.
- **SmartLock® Cylinders** lock blades in place when backdragging.

> MODELS

Steel 8'2", 9'2", 10'

Stainless Steel 8'2", 9'2"

Poly 8'2", 9'2"

> OPTIONAL ACCESSORIES

- D-Force®
- Snow Deflector
- Plow Wings
- Caster Wheels
- Cast-Iron Plow Shoes




Keep your blade in contact with the pavement with D-Force®. D-Force® improves scraping performance while backdragging by maintaining a consistent hydraulic down force powered by a hydraulic accumulator. D-Force® is an optional accessory on new 8'2" and 9'2" DXT plow purchases.



POWER PUNCH

The flared wings and enhanced blade curl of DXT snowplows power through and throw snow farther than traditional snowplows.

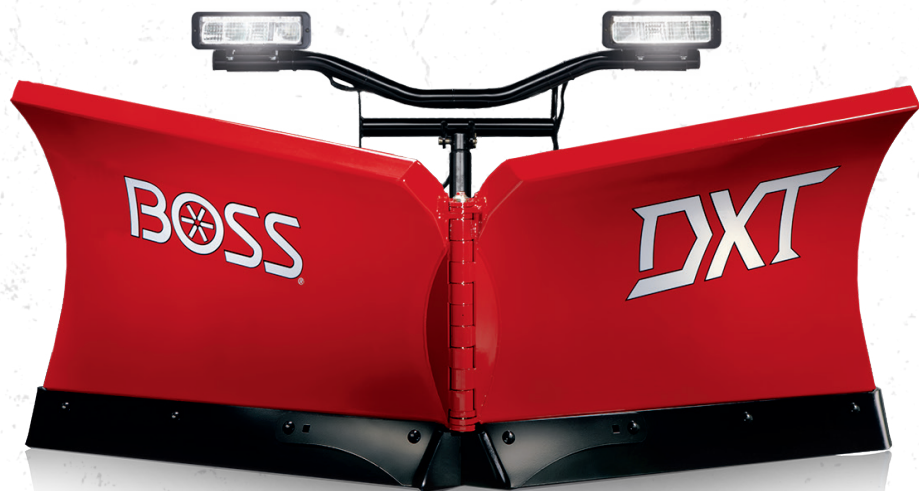

DXT



SEE IT IN ACTION
BOSSPLOW.COM

PROFESSIONAL-USE PLOWS

DXT

VEHICLE APPLICATION: 4WD, ¾- AND 1-TON TRUCKS, MEDIUM-DUTY TRUCKS 14,000-27,000 GVWR (10' ONLY)



Specifications	8'2" DXT Steel / Poly / Stainless	9'2" DXT Steel / Poly / Stainless	10' DXT Steel Heavy-Duty
Blade Width (Straight) Curb Guard Width*	98" (249 cm) 101" (256.5 cm)	110" (279 cm) 113" (287 cm)	120" (305 cm) 123.75" (314.3 cm)
Blade Width (V Position) Curb Guard Width*	88" (224 cm) 88" (224 cm)	100.65" (255.7 cm) 98.5" (250.2 cm)	107" (272 cm) 108" (274.3 cm)
Blade Width (Scoop) Curb Guard Width*	81" (206 cm) 92.9" (235.9 cm)	92" (234 cm) 103.3" (262.4 cm)	102" (259 cm) 111.1" (282.2 cm)
Plowing Width @ 30° Angle	85" (216 cm)	95" (241 cm)	104" (264 cm)
Blade Height	30" (76 cm) at center; 37½" (95 cm) at ends	30" (76 cm) at center; 37½" (95 cm) at ends	35" (89 cm) at center; 45" (114 cm) at ends
Blade Thickness	11-ga steel / ¾" (0.95 cm) poly / 14-ga stainless steel	11-ga steel / ¾" (0.95 cm) poly / 14-ga stainless steel	11-ga steel
Base Angle	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)**
Reinforcement Ribs	6 vertical, 2 diagonal	8 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs (Moldboard)	4 extension springs	4 extension springs	4 extension springs
Trip Springs (Base Angle)	6 total ½" x 6" AR 400	6 total ½" x 6" AR 400	6 total ½" x 6" AR 400
SmartLock® Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	2" x 10" (5 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2½" x 1½" x 12" (6.7 cm x 2.9 cm x 30.5 cm)
Attachment System	SmartHitch® 2	SmartHitch® 2	SmartHitch® 2
Plow Weight***	868 lb ^A (394 kg) / 878 lb ^A (398 kg) / 920 lb ^A (417 kg)	925 lb ^A (420 kg) / 935 lb ^A (424 kg) / 977 lb ^A (443 kg)	1,205 lb ^A (547 kg)
Plow Lights	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™
D-Force®	Optional	Optional	N/A

*Maximum product width. **The tripping base angles on the DXT come standard with curb guards and patented snow catcher, and they can be used as the cutting edge until worn. ***Plow weight does not include vehicle mount weight. ^AVehicle mount weight range: 130-160 lb (59-73 kg).

XT

VEHICLE APPLICATION: 4WD, ¾- AND 1-TON TRUCKS



Specifications	7'6" XT Steel	8'2" XT Steel / Poly / Stainless	9'2" XT Steel / Poly / Stainless
Blade Width (Straight) Curb Guard Width*	90" (229 cm) 93.75" (238.1 cm)	98" (249 cm) 101.75" (258.5 cm)	110" (279 cm) 113.75" (288.9 cm)
Plowing Width (V Position) Curb Guard Width*	81" (206 cm) 82.5" (209.6 cm)	88" (224 cm) 89.5" (227.3 cm)	99" (252 cm) 99.9" (253.8 cm)
Plowing Width (Scoop) Curb Guard Width*	74" (188 cm) 86.1" (218.7 cm)	81" (206 cm) 93" (236.2 cm)	92" (234 cm) 103.4" (262.6 cm)
Plowing Width @ 30° Angle	77" (196 cm)	85" (216 cm)	95" (241 cm)
Blade Height	30" (76 cm) at center; 36" (91 cm) at ends	30" (76 cm) at center; 37½" (95 cm) at ends	30" (76 cm) at center; 37½" (95 cm) at ends
Blade Thickness	14-ga steel	11-ga steel / ¾" (0.95 cm) poly / 14-ga stainless steel	11-ga steel / ¾" (0.95 cm) poly / 14-ga stainless steel
Cutting Edge (AR450)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs	4	4	4
SmartLock® Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	2" x 10" (5 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch® 2	SmartHitch® 2	SmartHitch® 2
Plow Weight**	713 lb ^B (323 kg)	785 lb ^B (356 kg) / 795 lb ^B (361 kg) / 823 lb ^B (374 kg)	842 lb ^B (382 kg) / 852 lb ^B (387 kg) / 882 lb ^B (400 kg)
Plow Lights	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™

*Maximum product width. **Plow weight does not include vehicle mount weight. ^BVehicle mount weight range: 75-105 lb (34-48 kg).

FREIGHT NOT
INCLUDED IN
PRICE OF UNIT.
FREIGHT WILL
BE BILLED UPON
PURCHASE.

HEAVY-DUTY DXT

HEAVY-DUTY DUAL-TRIP POWER AND PERFORMANCE

The 10-foot BOSS DXT is the next generation snowplow for medium-duty trucks. With V-plow versatility, the BOSS DXT allows you to scoop, stack and punch through hard-packed banks with power and performance. The DXT patented dual-trip technology provides enhanced plow protection when striking hidden obstacles—in any blade position. The BOSS DXT comes standard with the SL3 headlight system with Ice Shield Technology™ for increased visibility, even in the darkest conditions—ensuring that no matter what Mother Nature throws your way, BOSS is always there to BACK YOU UP.

STANDARD FEATURES

- **Patented Dual-Trip Design** combines trip-edge and full moldboard trip technologies, enhancing plow protection when striking hidden obstacles no matter your plow's position.
- **SmartLight™ 3 LED Headlight System** uses DOT-compliant 100% LED lights and Ice Shield Technology™ to prevent snow and ice build-up.
- **½" x 6" Long-Lasting, Durable Base Angle** provides extended wear resistance with built-in curb guards and patented snow catcher. The base angle serves as the plow's cutting edge until a certain wear point.
- **Cast-Iron Plow Shoes** extend the life of the cutting edge (standard on Heavy-Duty, optional on 10' DXT).



- **Heavy-Duty Push Frame and Attachment Bar** add strength and reliability.
- **Reinforced Moldboard** increases blade rigidity for increased durability.

> MODELS

Steel DXT 10'

> OPTIONAL ACCESSORIES

- Cast-Iron Plow Shoes
- Snow Deflector

10' DXT Steel



PROFESSIONAL-USE PLOWS

DXT

VEHICLE APPLICATION: 4WD, ¾- AND 1-TON TRUCKS, MEDIUM-DUTY TRUCKS 14,000-27,000 GVWR (10' ONLY)



Specifications	8'2" DXT Steel / Poly / Stainless	9'2" DXT Steel / Poly / Stainless	10' DXT Steel Heavy-Duty
Blade Width (Straight) Curb Guard Width*	98" (249 cm) 101" (256.5 cm)	110" (279 cm) 113" (287 cm)	120" (305 cm) 123.75" (314.3 cm)
Blade Width (V Position) Curb Guard Width*	88" (224 cm) 88" (224 cm)	100.65" (255.7 cm) 98.5" (250.2 cm)	107" (272 cm) 108" (274.3 cm)
Blade Width (Scoop) Curb Guard Width*	81" (206 cm) 92.9" (235.9 cm)	92" (234 cm) 103.3" (262.4 cm)	102" (259 cm) 111.1" (282.2 cm)
Plowing Width @ 30° Angle	85" (216 cm)	95" (241 cm)	104" (264 cm)
Blade Height	30" (76 cm) at center; 37½" (95 cm) at ends	30" (76 cm) at center; 37½" (95 cm) at ends	35" (89 cm) at center; 45" (114 cm) at ends
Blade Thickness	11-ga steel / ¾" (0.95 cm) poly / 14-ga stainless steel	11-ga steel / ¾" (0.95 cm) poly / 14-ga stainless steel	11-ga steel
Base Angle	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)**	½" x 6" (1.3 cm x 15 cm)**
Reinforcement Ribs	6 vertical, 2 diagonal	8 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs (Moldboard)	4 extension springs	4 extension springs	4 extension springs
Trip Springs (Base Angle)	6 total ½" x 6" AR 400	6 total ½" x 6" AR 400	6 total ½" x 6" AR 400
SmartLock® Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	2" x 10" (5 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2½" x 1½" x 12" (6.7 cm x 2.9 cm x 30.5 cm)
Attachment System	SmartHitch® 2	SmartHitch® 2	SmartHitch® 2
Plow Weight***	868 lb ^A (394 kg) / 878 lb ^A (398 kg) / 920 lb ^A (417 kg)	925 lb ^A (420 kg) / 935 lb ^A (424 kg) / 977 lb ^A (443 kg)	1,205 lb ^A (547 kg)
Plow Lights	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™
D-Force®	Optional	Optional	N/A

*Maximum product width. **The tripping base angles on the DXT come standard with curb guards and patented snow catcher, and they can be used as the cutting edge until worn. ***Plow weight does not include vehicle mount weight. ^AVehicle mount weight range: 130-160 lb (59-73 kg).

XT

VEHICLE APPLICATION: 4WD, ¾- AND 1-TON TRUCKS



Specifications	7'6" XT Steel	8'2" XT Steel / Poly / Stainless	9'2" XT Steel / Poly / Stainless
Blade Width (Straight) Curb Guard Width*	90" (229 cm) 93.75" (238.1 cm)	98" (249 cm) 101.75" (258.5 cm)	110" (279 cm) 113.75" (288.9 cm)
Plowing Width (V Position) Curb Guard Width*	81" (206 cm) 82.5" (209.6 cm)	88" (224 cm) 89.5" (227.3 cm)	99" (252 cm) 99.9" (253.8 cm)
Plowing Width (Scoop) Curb Guard Width*	74" (188 cm) 86.1" (218.7 cm)	81" (206 cm) 93" (236.2 cm)	92" (234 cm) 103.4" (262.6 cm)
Plowing Width @ 30° Angle	77" (196 cm)	85" (216 cm)	95" (241 cm)
Blade Height	30" (76 cm) at center; 36" (91 cm) at ends	30" (76 cm) at center; 37½" (95 cm) at ends	30" (76 cm) at center; 37½" (95 cm) at ends
Blade Thickness	14-ga steel	11-ga steel / ¾" (0.95 cm) poly / 14-ga stainless steel	11-ga steel / ¾" (0.95 cm) poly / 14-ga stainless steel
Cutting Edge (AR450)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	6 vertical, 2 diagonal	6 vertical, 2 diagonal	8 vertical, 2 diagonal
Plow Shoes	Optional	Optional	Optional
Trip Springs	4	4	4
SmartLock® Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	2" x 10" (5 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Attachment System	SmartHitch® 2	SmartHitch® 2	SmartHitch® 2
Plow Weight**	713 lb ^B (323 kg)	785 lb ^B (356 kg) / 795 lb ^B (361 kg) / 823 lb ^B (374 kg)	842 lb ^B (382 kg) / 852 lb ^B (387 kg) / 882 lb ^B (400 kg)
Plow Lights	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™	SL3 LED with Ice Shield Technology™

*Maximum product width. **Plow weight does not include vehicle mount weight. ^BVehicle mount weight range: 75-105 lb (34-48 kg).