

THIS CHANGES
EVERYTHING.
AGAIN.



VACTOR[®]
2100i

THE NEW VACTOR® 2100i. SIMPLY BETTER.



intuitive. intelligent. innovative. individualized. incomparable.

These words describe the new Vactor 2100i. Add it all together and you have a machine that combines proven performance with a new level of simplicity and ease. With an emphasis on ergonomics, Vactor has engineered an array of innovations that together speeds work, reduces fatigue on your operators, and lets them focus on the work in front of them, not the machine behind them. Among the host of innovations you'll find on the 2100i are:

- New IntuiTouch™ single in-cab control screen for PTO/Transfer Case Activation that is as simple as pushing a button
- New IntuiTouch operator control station that features a singular, adjustable control panel for operator ease and comfort during all sewer cleaning functions
- New 7" easy-to-read screen at the operator's station to monitor critical data from the sewer cleaning system and chassis
- New optional wireless controls, including updated belly pack and handheld remotes featuring a view screen for monitoring key operational functions when working away from the truck
- New optional RDB 1015™ Rapid Deployment Boom telescopes out 10 feet and extends the debris hose down 15 feet minimizing the need for additional tubes, speeding and easing set-up and tear-down

The new 2100i is truly the evolution of a revolution that is not just easier to operate...it's easier on the operator

VACTOR 2100i. INTUITIVE IN EVERY WAY.

New IntuiTouch® one-touch in-cab controls redefine simplicity

- 7" touch screen control features backlit tactile buttons
- Includes controls and viewing screen for camera, lighting, recirculation and PTO/Transfer case activation
- One-Touch engagement to activate PTO and transfer case – allowing operators to gain control of all operational systems
- Operator can view the current operating mode, recirculation status, flows, pressures and more



New IntuiTouch control station puts all cleaning system functions into a single, simple control panel

- Articulating controls with up/down adjustment for individualized maximum comfort – articulation allows the control panel to adjust on a 90 degree arc for better access and screen visibility while operating the hose reel and boom
- All controls are consolidated into a single control panel including a 7" dashboard screen with glove-friendly tactile buttons featuring at-a-glance data for water pressure and flow, hose footage, chassis RPM, vacuum information, water level*, debris tank level* and more




- New, reliable touch buttons with backlit feedback enable the operator to know if a selected function is active
- The new hose reel joystick significantly improves response time and pays in and out in the direction of the hose reel
- The boom joystick has a telescoping feature built in, giving the operator full mobility with multiple direction boom movement for quicker set up
- Operators have full control of the water system via a single Multi-Flow control dial – enabling them to precisely match the flow and pressure to the job requirements
- E-stops located at all operator control points bring the unit to a safe condition to protect both the operator and the equipment

*Optional equipment

UP AND DOWN, FRONT AND BACK THE VACTOR 2100i OFFERS YOU GREATER OPERATING EASE AND EFFICIENCY.

- JetRodder® Water Pump

- Uniquely designed for sewer cleaning, the JetRodder Water Pump provides smooth continuous flows through its entire operating range – ranges available from 0 to 100 GPM and pressures up to 3000 PSI
 - Easily activated, powerful “Jackhammer” action for long runs or difficult blockages
 - The slow movements of its five moving parts make the Vactor JetRodder pump the industry leader in longevity and carefree maintenance
- Vactor’s Multi-Flow system lets operators set the flow at a lower rpm resulting in better fuel economy without sacrificing performance
 - Vactor’s unique air-routing and filtration system get the work done faster, safer, and more productively
 - All water valves are located in the same mid-ship control station, reducing the amount of walking back and forth around the truck by the operator
 - The quieter engine design, high ground clearance, lower water fill point, and twist-and-lock pipe restraints enhance the operator experience
 - The hose reel can telescope out up to 15 inches and rotate up to 270° for optimal positioning
 - Vactor’s water tank system is designed and built with high quality, high-strength light weight aluminum for maximum capacity and maintaining a low center of gravity – the tanks feature superior corrosion resistance and are backed by a 10-year standard warranty
 - Unique Modul-Flex design provides for maximum capacities and optimum weight distribution on every truck
 - Standard 60 inch (1524 mm) high dump enables you to unload debris into roll-offs up to 5-feet (1.524 m) high without requiring a lift or ramp

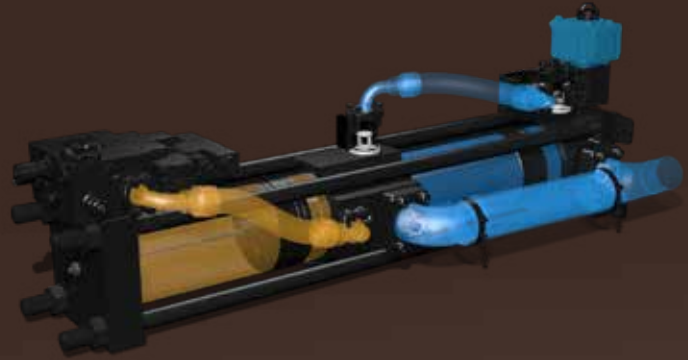



IntuiTouch articulated controls put controls within comfortable reach, allowing operators to better focus on their work



Vector's centrifugal cyclones* are designed and located to improve air filtration and permit easier cleaning




*Optional equipment

THE VACTOR 2100i COMES IN THE CONFIGURATIONS YOU NEED.

Our Positive Displacement (PD) model is ideal for pulling material long distances

With blower offerings providing inlet volumes in excess of 5000 CFM and 18 Hg vacuum, the Vactor 2100i PD is the machine you need to tackle your deepest pulls. In addition, our multi-stage blower filtration system is the most productive of its kind, and unique design features make the 2100i the most operator friendly unit available.

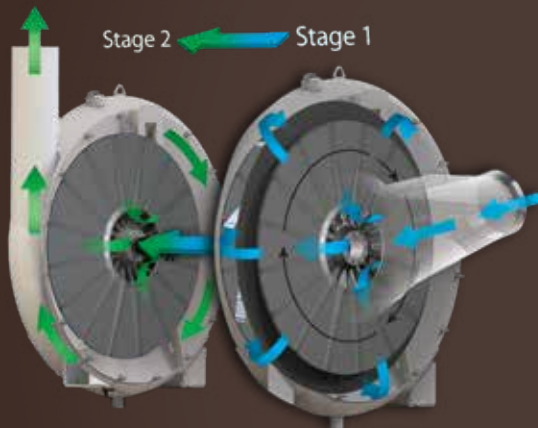

For all around service, choose a single engine, single or dual stage fan model

Vactor's fan system is the right choice for all-around sanitary and storm sewer cleaning. Whether equipped with a single or dual (for greater vacuum) fan system, our lightweight, perfectly balanced aluminum fan provides superior performance to handle your toughest jobs. Our unique system also minimizes energy consumption while maximizing performance.

Our water recycling model saves thousands of gallons of clean water every shift

Simple to operate, our self-cleaning system offers significant advantages:

- Absolute water filtration to 100 micron particle sizes eliminates most abrasive particles to protect the water pump, hoses, nozzles, and sewer lines
- 5-stage filtration system combines settling, centrifugal separation and absolute filtration to 100 microns
- Simultaneous operation recycles water while cleaning lines
- No moving parts in the body or tanks
- Never a need to enter a body or tank to maintain the system components



CUSTOMIZE YOUR 2100i WITH PERFORMANCE DRIVEN OPTIONS.

Our RDB 1015 Rapid Deployment Boom **RDB 1015™**

Our revolutionary new boom telescopes 10 feet out and extends the debris hose down 15 feet speeding work, and, in many cases, eliminating the need for additional tubes, reducing operator fatigue. The RDB 1015 offers you:

- Dramatic reduction in set-up and tear-down time with boom's ability to pay-in and pay-out 15 feet of vacuum hose
- Reach greater depths without raising the position of the boom to enhance speed and efficiency
- The ability to work in areas of low overhead clearance without raising the boom and still reach needed depths



New wireless controls

Vector has enhanced its wireless controls with new belly pack and handheld remotes that feature two-way data transmission, including active pressure and flow information for the water and the ability to monitor hose footage being paid out or retracted. Our wireless controls also allow:

- Extensive operation with greater control away from the fixed operator station
- Multiple control functions including hose reel control, boom control, e-stop and more



Over 100 precision-engineered enhancements are available, including:

- Cold weather recirculation system
- Liquid debris pump-off system
- Debris flush-out system
- Fail-safe hydraulic door locking system
- Water tank capacity up to 1,500 gallons (5,678 L)
- Pump delivery system up to 120 gpm
- Hose reel capacity up to 1,000 ft. (305 m)
- Automatic hose level wind guide
- Safety warning lighting packages
- Hydro-Excavation Kits

Demo the new Vector 2100i today.
Visit Vector.com to find your local dealer.


THE NEW VACTOR 2100i

Performance you expect from a proven leader.



For nearly half a century, Vactor® Manufacturing has been the leader in building combination sewer cleaners that offer innovations and design advantages that drive productivity, enhance operator performance and security, and bring operations large and small greater economy and efficiency. With the new Vactor 2100i, we have once again raised the bar, bringing you a new level of operating ease and greater control.

More than a manufacturer, Vactor offers you customized solutions featuring unmatched quality and backed by powerful support. When the rain is falling and the water is rising, Vactor is the brand you can trust.



VACTOR[®]
Subsidiary of Federal Signal Corporation

vactor.com

Vactor Manufacturing, Inc. • 1621 South Illinois Street • Streator, IL 61364 USA
Phone 815.672.3171 • Fax 815.672.2779

Specifications subject to change without notice. Some products shown with optional equipment. Vactor®, JetRodder®, IntuiTouch®, RDB 1015™, and ParkNClean® are registered trademarks of Vactor Manufacturing. This product may be covered by one or more United States Patents and/or pending patent applications. See: www.vactor.com/patents. Vactor is a subsidiary of Federal Signal Corp. Federal Signal is listed in the NYSE by the symbol FSS.

Prepared For:

Infrastructure Solutions Group
 Pete Kurz
 8383 Old Richfood Rd.
 Mechanicsville, VA 23116-2017
 (804)730 - 4040
 Reference ID: Vac/Guz66KHV607

Model Profile
2024 HV607 SBA (HV607)

AXLE CONFIG: 6X4
APPLICATION: Sewer Vac
MISSION: Requested GVWR: 66000. Calc. GVWR: 66000. Calc. GCWR: 80000
 Calc. Start / Grade Ability: 18.21% / 2.14% @ 55 MPH
 Calc. Geared Speed: 70.1 MPH

DIMENSION: Wheelbase: 262.00, CA: 194.90, Axle to Frame: 71.00
ENGINE, DIESEL: {Cummins L9 370} EPA 2021, 370HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)

TRANSMISSION, AUX., RELOCATED: Jack Shaft at Front Flange, Pin Center 92" Back of Cab; with Minus 3 Degree Angle
TRANSMISSION, AUTOMATIC: {Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway

CLUTCH: Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING: {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM: {Meritor RT-46-160P} Single Reduction, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 5.63

CAB: Conventional, Day Cab
TIRE, FRONT: (2) 425/65R22.5 Load Range L HAC 3 (CONTINENTAL), 465 rev/mile, 68 MPH, All-Position
TIRE, REAR: (8) 11R22.5 Load Range G HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, TANDEM: {Hendrickson RT-463} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Multileaf Springs, with Bronze Center Bushings

FRAME REINFORCEMENT: Full Outer C-Channel, Heat Treated Alloy Steel (120,000 PSI Yield), 10.813" x 3.892" x 0.312" (274.6mm x 98.8mm x 7.9mm), 480.0" (12192mm) OAL

PAINT: Cab schematic 100WL
 Location 1: 9219, Winter White (Std)
 Chassis schematic N/A

Description

Base Chassis, Model HV607 SBA with 262.00 Wheelbase, 194.90 CA, and 71.00 Axle to Frame.

AXLE CONFIGURATION {Navistar} 6x4

Notes

: Pricing may change if axle configuration is changed.

FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL

FRAME REINFORCEMENT Full Outer C-Channel, Heat Treated Alloy Steel (120,000 PSI Yield), 10.813" x 3.892" x 0.312" (274.6mm x 98.8mm x 7.9mm), 480.0" (12192mm) OAL

BUMPER, FRONT Omit Item

SPECIAL FRAME PIERCING Additional Holes for Vactor Guzzler Manufacturing Co. 2100 Plus Product

CROSSMEMBER, INTERMEDIATE LOC Relocated for Driveshaft, Special for Vactor Guzzler 2100 Plus Product

WHEELBASE RANGE 221" (560cm) Through and Including 262" (665cm)

AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity

SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 20,000-lb Capacity, with Shock Absorbers

BRAKE SYSTEM, AIR Dual System for Straight Truck Applications

Includes

: BRAKE LINES Color and Size Coded Nylon

: DRAIN VALVE Twist-Type

: GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster

: PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel

: PARKING BRAKE VALVE For Truck

: QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4

: SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6

DRAIN VALVE {Bendix DV-2} Automatic, with Heater, for Air Tank

AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Full Vehicle Wheel Control System

AIR DRYER {Wabco System Saver 1200} with Heater

BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 Sqli Spring Brake

BRAKE CHAMBERS, FRONT AXLE {Bendix} 24 Sqli

BRAKE, PARKING Manual Push-Pull Pneumatic Parking Brake

SLACK ADJUSTERS, FRONT {Gunite} Automatic

SLACK ADJUSTERS, REAR {Gunite} Automatic

AIR COMPRESSOR {Cummins} 18.7 CFM

AIR TANK Painted Aluminum, with Straight Thread O-Ring Ports

AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab

AIR TANK LOCATION (2) Stacked, Outside Right Rail, Back of Cab, Perpendicular to Rail

BRAKES, REAR {Meritor 16.5X7 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 7", 23,000-lb Capacity per Axle

BRAKES, FRONT {Meritor 16.5X6 Q-PLUS CAST} Air S-Cam Type, Cast Spider, Fabricated Shoe, Double Anchor Pin, Size 16.5" X 6", 23,000-lb Capacity

PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type

Description

STEERING COLUMN Tilting

STEERING WHEEL 4-Spoke; 18" Dia., Black

STEERING GEAR (2) {Sheppard M100/M80} Dual Power

DRIVELINE SYSTEM {Dana Spicer} SPL170 Main Driveline with SPL170 Interaxle Shaft, for 6x4

AFTERTREATMENT COVER Aluminum

EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab

ENGINE EXHAUST BRAKE for Cummins ISB/B6.7/ISL/L9 Engine with Variable Vane Turbo Charger

TAIL PIPE (1) Turnback Type, Bright

MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel

EXHAUST HEIGHT 8' 10"

SWITCH, FOR EXHAUST 3 Position, Momentary, Lighted Momentary, ON/CANCEL, Center Stable, INHIBIT REGEN, Mounted in IP Inhibits Diesel Particulate Filter Regeneration When Switch is Moved to ON While Engine is Running, Resets When Ignition is Turned OFF

ELECTRICAL SYSTEM 12-Volt, Standard Equipment

Includes

: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab

: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel

: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever

: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light

: STARTER SWITCH Electric, Key Operated

: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector

: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature

: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever

: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted

: WIRING, CHASSIS Color Coded and Continuously Numbered

ALTERNATOR {Leece-Neville AVI160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount, with Remote Sense

BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Sleeper, Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn

BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud

SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars

RADIO, AUXILIARY CONTROLS Mounted in Steering Wheel, Radio Function Control Switch, Includes Volume Up/Down, Mute, Forward/Back and Bluetooth Answer/Disconnect

ANTENNA for Increased Roof Clearance Applications

RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input

BACK-UP ALARM Electric, 102 dBA

STOP, TURN, TAIL & B/U LIGHTS Omit Item, Does Not Omit Cable to End of Frame, DOES NOT INCLUDE LICENSE PLATE LIGHT

BATTERY CABLES with 36" of Extra Length Coiled and Strapped Near Battery Box

HORN, ELECTRIC Disc Style

BATTERY BOX Omit, Batteries to be Mounted Temporarily, Body Builder to Supply Battery Box

WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time

Description

CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade

TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights

HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on

INDICATOR, LOW COOLANT LEVEL with Audible Alarm

ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened

STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start

CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender

BATTERY DISCONNECT SWITCH 300 Amp, Disconnects Charging Circuits, Locks with Padlock, Cab Mounted

HORN, AIR Single Trumpet, Black, with Lanyard Pull Cord

POWER SOURCE, ADDITIONAL Auxiliary Power Outlet (APO) with USB Port, Located in the Instrument Panel

HEADLIGHTS Halogen, with Daytime Running Lights

FENDER EXTENSIONS Rubber

LOGOS EXTERIOR Model Badges

LOGOS EXTERIOR, ENGINE Badges

INSULATION, UNDER HOOD for Sound Abatement

GRILLE Stationary, Chrome

INSULATION, SPLASH PANELS for Sound Abatement

FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV

PAINT SCHEMATIC, PT-1 Single Color, Design 100

Includes

: PAINT SCHEMATIC ID LETTERS "WL"

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360

LABEL, DEF "DEF ONLY"

PROMOTIONAL PACKAGE Government Silver Package

MUD FLAPS, FRONT WHEELS (2) Rubber, Mounted on Fender Extension, for Tire Size 425/445

CLUTCH Omit Item (Clutch & Control)

ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection

BLOCK HEATER, ENGINE 120V/1000W, for Cummins ISB/B6.7/ISL/L9 Engines

Includes

: BLOCK HEATER SOCKET Receptacle Type; Mounted below Drivers Door

ENGINE, DIESEL {Cummins L9 370} EPA 2021, 370HP @ 2100 RPM, 1250 lb-ft Torque @ 1200 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)

FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed

Includes

Description

: FAN Nylon

RADIATOR Aluminum, Cross Flow, Front to Back System, 1228 Sqn, with 1167 Sqn Charge Air Cooler

Includes

: DEAERATION SYSTEM with Surge Tank

: HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps

: RADIATOR HOSES Premium, Rubber

AIR CLEANER Dual Element

EMISSION, CALENDAR YEAR {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2023

THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)

ENGINE WATER COOLER Auxiliary, Supply and Return Connections for Customer Installed Cooler Package, Located Inside Right Frame Rail Under Cab

CARB IDLE COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations

ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls and Starter Lockout, with Ignition Switch Control, for Cummins B6.7 and L9 Engines

CARB EMISSION WARR COMPLIANCE Federal, Does Not Comply with CARB Emission Warranty

TRANSMISSION, AUTOMATIC {Allison 3000 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, with 80,000-lb GVW and GCW Max, On/Off Highway

TRANSMISSION, AUX., RELOCATED Jack Shaft at Front Flange, Pin Center 92" Back of Cab; with Minus 3 Degree Angle

OIL COOLER, TRANSMISSION {Modine} Water to Oil Type

TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission

TRANSMISSION OIL Synthetic; 29 thru 42 Pints

ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS), Airport Refueler, Sewer Evac, Package Number 150

NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

TRANSMISSION TCM LOCATION Located Inside Cab

SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming

PTO LOCATION Dual, Customer Intends to Install PTO at Left and/or Right Side of Transmission

AXLE, REAR, TANDEM {Meritor RT-46-160P} Single Reduction, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 5.63

SUSPENSION, REAR, TANDEM {Hendrickson RT-463} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Multileaf Springs, with Bronze Center Bushings

DEF TANK 9.5 US Gal (36L) Capacity, Frame Mounted Outside Left Rail, Under Cab

FUEL/WATER SEPARATOR {Racor 400 Series} 12 VDC Electric Heater, Includes Pre-Heater, with Primer Pump, Includes Water-in-Fuel Sensor, Mounted on Engine

FUEL TANK Polished Aluminum, 26" Dia, 100 US Gal (379L), Mounted Left Side, Under Cab

FUEL COOLER Less Thermostat; Mounted in Front of Cooling Module

AUXILIARY FUEL DRAW TUBE Located at Auxiliary Port on Fuel Tank

CAB Conventional, Day Cab

Description

AIR CONDITIONER with Integral Heater and Defroster

GAUGE CLUSTER Premium Level; English with English Electronic Speedometer

Includes

: GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for
: GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure
: WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)

GRAB HANDLE, CAB INTERIOR (2) Safety Yellow

SEATBELT WARNING LIGHT IND. Mounted in Dash, Will Flash when Park Brake is Disengaged and Driver Seatbelt Unfastened, Audible Alarm to Remind Driver to Fasten Seatbelt

IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

VIRTUAL GA, OIL TEMP,AUTO XMSN for Allison Transmission, Requires Premium Cluster

SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, with 2 Position Front Cushion Adjust, -3 to +14 Degree Angle Back Adjust

SEAT, PASSENGER {National 2000} Air Suspension, High Back with Integral Headrest, Vinyl, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Back Adjust

GRAB HANDLE, EXTERIOR (2) Chrome, for Cab Entry, (1) Towel Bar Type, with Anti-Slip Rubber Inserts Mounted Left Side at B-Pillar, (1) Towel Bar Type Mounted Right Side on Vertical Exhaust

MIRRORS (2) Aero Pedestal, Power Adjust, Heated, Bright Heads, Black Arms, 6.5" x 14" Flat Glass, Includes 6.5" x 6" Convex Mirrors, for 102" Load Width

Notes

: Mirror Dimensions are Rounded to the Nearest 0.5"

MIRROR, CONVEX, LOOK DOWN Right Side, Bright, 6" x 10.5"

CAB INTERIOR TRIM Diamond, for Day Cab

Includes

: CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger

: DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Reading Lights; Integral to Overhead Console, Center Mounted

: SUN VISOR (3) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Vanity Mirror and Toll Ticket Strap, plus 1 Auxiliary Visor (Front Only), Driver Side

MONITOR, TIRE PRESSURE Omit

ARM REST, RIGHT, DRIVER SEAT

ARM REST, LEFT, PASSENGER SEAT

WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature

FRESH AIR FILTER Attached to Air Intake Cover on Cowl Tray in Front of Windshield Under Hood

CAB REAR SUSPENSION Air Bag Type

TELEMATICS BRACKET with Universal Mount, 1.5" Ball Mount Size, for Customer Supplied Telematics Device, Mounted in Auxiliary Gauge Location in Flat Panel, Includes (1) APO and (1) USB Port

INSTRUMENT PANEL Flat Panel

ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab

Description

WHEELS, FRONT {Accuride 29374} DISC; 22.5x12.25 Rims, Extra Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

WHEELS, REAR {Accuride 43644} DUAL DISC; 22.5x8.25 Rims, Standard Polish Aluminum, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

(8) TIRE, REAR 11R22.5 Load Range G HDR2+ (CONTINENTAL), 491 rev/mile, 75 MPH, Drive

(2) TIRE, FRONT 425/65R22.5 Load Range L HAC 3 (CONTINENTAL), 465 rev/mile, 68 MPH, All-Position

Services Section:

WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A

SRV CONTRACT, EXT VEH COVERAGE {Navistar} To 36-Month/150,000 Miles (240,000 km), Excludes Extended Warranty for Engine and Transmission

SERVICES, TOWING {Navistar} Service Call to 36-Month/Unlimited Mileage to the Nearest Navistar Dealer for Navistar Warrantable Failure as Contract Defined; Includes Engine Failure if Supplier Declines Tow Coverage & ESC Supplied thru Navistar; \$550 (USA) Maximum Benefit per Incident

SRV CONTRACT, EXT CMS ENG/AFTR {Cummins} To 36-Month/150,000 Miles (240,000 km), Extended Cummins L9 Engine Coverage, Protection Plan 1 and Aftertreatment, (Truck Application Only)