



Peterbilt of Richmond (H830)
 2800A Deepwater Terminal
 Richmond, Virginia 23212

Virginia Sheriffs Association
 901 East Byrd St Suite 1301
 Richmond, Virginia 23219
 United States of America

David Askew
 Cell Phone:
 Office Phone:
 Email: daskew@thepetestore.com

Kaylyn Mitman
 Office Phone: 919-459-6471
 Email: kmitman@virginia sheriffs.org

Vehicle Summary

	Unit		Chassis	
Model:		Model 537	Fr Axle Load (lbs):	12000
Type:		Full Truck	Rr Axle Load (lbs):	21000
Description 1:		537 Option Specs	G.C.W. (lbs):	33000
Description 2:				
	Application		Road Conditions:	
Intended Serv.:	Construction Dump-On/Off Highway		Class A (Highway)	100
Commodity:	Construction Materials		Class B (Hwy/Mtn)	0
			Class C (Off-Hwy)	0
			Class D (Off-Road)	0
	Body		Maximum Grade:	
Type:		End Dump		6
Length (ft):		24	Wheelbase (in):	215
Height (ft):		13.5	Overhang (in):	60
Max Laden Weight (lbs):		1000	Fr Axle to BOC (in):	69.5
			Cab to Axle (in):	145.5
			Cab to EOF (in):	205.5
No. of Trailer Axles:		0	Overall Comb. Length (in):	315
Type:				
Length (ft):		0	Special Req.	
Height (ft):		0		
Kingpin Inset (in):		0		
Corner Radius (in):		0		
	Restrictions			
Length (ft):		40		
Width (in):		102		
Height (ft):		13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.



Sales Code	Std/ Opt	Description	\$ List	Weight
Base Model				
0005371	S	Model 537 The Peterbilt Model 537 is highly versatile to take on the big jobs. It is available as a Class 7 truck or tractor with a GVW up to 33,000 lbs. With a full range of suspensions and an available all-wheel-drive configuration, the 537 is the perfect match for applications such as wrecker, tanker, beverage delivery, and municipal utilities just about any job you can throw at it.	103,943	9,870
0091070	O	Construction Materials	0	0
0093060	O	Construction Dump-On/Off Highway Truck or tractor without liftable trailing axle which carries bulk materials (excavated earth, sand/gravel, asphalt, demolition debris, etc.) and unloads by dumping out the back, over the side of the body, or out the bottom of the trailer.	0	0
0095170	O	End Dump	0	0
0098170	S	United States Registry Canadian Registry Package Requires Air Conditioning Excise Tax Canada, Speedometer to be KPH ipo MPH, Daytime Running Lights and Rubber Battery Pad in Bottom of Battery Box.	0	0
Configuration				
0200700	S	Not Applicable Secondary Manufacturer	0	0
Frame & Equipment				
0514000	O	10-3/4" Steel Rails To 354" 10.75x3.5x.375 Dimension, 2,136,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 17.8 cubic inches. Weight: 1.74 lbs/inch pair	468	505
0601500	O	Full Steel Inner Liner	1,912	628
0611300	O	Heavy Duty 5-Piece Crossmember BOC IPO Standard Class 5, 6, 7	118	20
0611330	O	Zinc Coated Anti Corrosion Treated Frame Rails Requires Frame Rail Code. Zinc Phosphate coating will replace the standard frame rail primer and provide added corrosion prevention for your customer's operating in severe conditions or in climates where vehicle rust is common.	366	2
0611790	O	Aluminum Frame Rail Crossmembers Excludes suspension	154	-7
0612230	O	Custom Wheelbase or Overhang Engineering approval may be required.	350	0
0620535	O	FEPTO Prov 24" Bumper Extension With Engine Adapter	1,929	90
0644090	S	EOF Square without Crossmember End-of-frame square without crossmember. For use with body builder installed crossmember.	0	0

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
0651090	S	Omit Rear Mudflaps and Hangers	0	0
Front Axle & Equipment				
1014100	S	Hendrickson SteerTek NXT 12,000 lb 3.32 in Drop	37	0
1111160	S	Mono-Leaf Springs, Shocks, 12,000 LBS.	0	0
1243040	S	Power Steering Sheppard HD94 Sheppard HD94 power steering gear is a light weight version of heavy duty line-haul power steering gear. For use with 10,000 to 13,200 lb. axle ratings.	0	0
1250180	O	Power Steering Reservoir Frame Mounted The power steering reservoir is a steering system that eases drivability by applying hydraulic pressure to the steering gear.	0	0
1354850	O	PHP10 Iron PreSet PLUS Hubs - Air Disc Preset iron hub assemblies are designed for demanding conditions and require less maintenance while still offering dependability and superior performance. Precisely engineered to minimize roller stress under heavy loads and increase bearing life when used in demanding conditions such as wide-based single wheels and misalignment due to spindle wear.	1,217	27
1354870	O	Severe Service Disc Brake Rotor For refuse applications, providing the braking torque necessary to slow or stop the vehicle.	58	100
1380070	O	Greasable Front Spring Pins	124	0
1380290	O	Bendix Air Disc Front Brakes Bendix air disc front brakes use a floating caliper design to provide foundation braking on all axles and complies with reduced stopping distance regulations.	-173	30
1380550	O	Hendrickson Wide Track IPO Standard Hendrickson Wide Track in place of standard front axle 71" KPI IPO 69" front axle for improved turning radius.	0	15
1391480	O	Pad Dust Shields for Air Disc Brakes; Front Axle Pad dust shields for air disc brakes can increase brake life. Brake dust shields reduce the buildup of road grime, extend brake system life and prevent premature failure.	29	2
Rear Axle & Equipment				
1511940	S	Meritor MS21-14X 21,000 LB MS-14X single rear drive axles have hypoid-generoid gearing options that offer long life and increased durability. Rigid differential cases offer precise gear alignment and durability. Optional driver-controlled differential lock (DCDL) maximizes traction and spinout protections in slippery conditions.	0	0
1616305	O	PHP10 Iron Preset + Hubs - Air Disc	824	0
1616310	O	Severe Service Disc Brake Rotor Severe Service Disc Brake Rotor for refuse applications.	853	14

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
1660020	O	Pad and Rotor Dust Shields For Air Disc Brakes, Drive Axle(s)	290	15
1680500	S	SBM Valve Full trucks require a spring brake modulation (SBM) system for emergency braking application. This system requires an SBM valve and a relay valve with spring brakes on the rear axles. The SBM valve allows the foot valve to operate the rear axle spring brakes if a failure exists in the rear air system.	0	0
1680570	O	Bendix ESP Electronic Stability Program With ATC Truck, end dump or roll-off 20-30 yard only (requires body manufacturer code). Model 367 set-forward front axle requires 170"-311" wheelbase. Model 365 set-forward front axle and set-back front axle requires 170"-311" wheelbase. Model 348 requires 170" - 311" for tandem axle. System provides added stability and traction by applying brakes when excessive wheel slip or critical stability threshold is detected. This system is ideally suited for this application due to the high center of gravity loads typical for dump trucks and the risk of rollovers.	822	0
1680615	O	RH Side Sensor For Bendix Collision Mitigation	882	25
1680795	O	Diff Lock, Single Drive Axle with Speed Interlock	1,708	30
1680985	O	Bendix Fusion Bendix Fusion is an integrated driver assistance technology, utilizing a windshield mounted camera, bumper mounted radar and brake system information for the following features: Collision Mitigation, Stationary Vehicle Braking, Multi-lane Autonomous Emergency Braking, Highway Departure Warning and Braking, Following Distance Alerts, Lane Departure Warning, Overspeed Alert and Adaptive Cruise Control with Auto-Resume at speed.	4,072	5
1681015	O	Radio Mute When Lane Departure Detected Requires Fusion/OnAlert And Radio	0	0
1681025	O	Adjustable Following Distance Adaptive CC	0	0
1681035	O	Standard Following Distance Adaptive CC	0	0
1681055	O	Safety Direct With Video Recording & Wifi; Back-Up Battery. Includes 30 Hours Of Onboard Video Storage	274	0
1682430	S	Anti-Lock Braking System (ABS) 4S4M ABS-6. Includes air braking system.	0	0
1683225	O	SmarTire Tire Pressure Monitoring System Next generation TPMS.	939	25
1684200	S	Synthetic Axle Lubricant All Axles Peterbilt heavy duty models include Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life.	0	0
1687080	O	Air Disc Rear Brakes, Single Drive Axle	2,039	0

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
1704880	O	Ratio 4.88 Rear Axle	0	0
1811210	O	Peterbilt Air Trac 23,000 lb Light Weight	1,050	165
1920385	O	Air Springs, Internal Bumpers Air Trac / Air Leaf suspensions	55	0
1921805	O	Automatic Suspension Dump With PTO Engagment	600	0
1922260	O	Dash Mtd Dump Switch with Indicator Light Dash mounted dump switch with indicator light for suspension.	30	2

Engine & Equipment

2074510	O	PACCAR PX-9 350@2000 GOV@2200 1050@1200 Productivity (2021 Emissions)	11,119	475
		N21350 C121 64....Maximum Accelerator Pedal Ve N21370 C128 64....Maximum Cruise Speed (P059) N21460 C132 1400..Max PTO Speed (P046) N21520 C133 5.....Timer Setting (P030) N21610 C188 39....Low Ambient Temperature Thre N21620 C189 60....Intermediate Ambient Tempera N21630 C190 80....High Ambient Temperature Thr N21550 C206 35....Engine Load Threshold (P516) N21340 C209 120...Hard Maximum Speed Limit (P1 N21510 C225 YES...Enable Idle Shutdown Park Br N21450 C231 NO....Gear Down Protection (P026) N21570 C233 NO....Idle Shutdown Manual Overrul N21440 C234 NO....Engine Protection Shutdown (N21480 C238 NO....Auto Engine Brake in Cruise N21470 C239 NO....Cruise Control Auto Resume (N21430 C333 0.....Reserve Speed Limit Offset (N21410 C334 0.....Maximum Cycle Distance (N202 N21590 C382 YES...Enable Hot Ambient Automatic N21500 C395 0.....Expiration Distance (N209) N21530 C396 YES...Enable Impending Shutdown Wa N21540 C397 60....Timer For Impending Shutdown N21320 C399 120...Standard Maximum Speed Limit N21400 C400 252...Reserve Speed Function Reset N21420 C401 10....Maximum Active Distance (N20 N21330 C402 0.....Expiration Distance (N207)		
2091130	S	VMUX Electronics Architecture	0	0
2091305	O	Engine Idle Shutdown Timer Enabled	0	0
2091315	O	Enable EIST Ambient Temp Overrule	0	0
2091372		Eff EIST NA Expiration Miles	0	0

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
2091640		Effective VSL Setting NA	0	0
2092016	O	Typical Operating Speed 62 MPH	0	0
2092031	S	Powertrain Optimized for Fuel Economy Best analysis for vehicles which operate at or near cruise speed 90 plus percent of time.	0	0
2140150	O	Remote PTO and Throttle Provision 12-pin connector on engine harness.	16	0
2140200	O	CARB Engine Idling Compliance PACCAR PX-7, PX-9 and MX, Cummins X15 and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard.	0	0
2140450	O	Remote PTO/Throttle, 12-Pin Eng Bay Remote Control Provision	56	0
2140670	O	EPA Emission Warranty	0	0
2513060	S	PACCAR 160 Amp Alternator, Brushed PACCAR 160 AMP alternator, brushed producing 160 Amps at road speed and 100 Amps at idle.	0	0
2521090	O	Immersion Type Block Heater 110-120V Standard location for 2.1M and 1.9M models is left-hand under cab, Model 520 is in bumper, and for Model 220 it is at the driver step. Plug includes a weather-proof cover that protects the receptacle. This pre-heater keeps the coolant in the engine block from freezing when the engine is not running.	96	2
2522110	O	PACCAR 12V Starter, N/A PACCAR MX Engines PACCAR 12-volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	-3	0
2538050	O	4 PACCAR Premium 12V Dual Purpose Batt 2920 CCA Threaded stud type terminal. Stranded copper battery cables are double aught (00) or larger to reduce resistance.	402	124
2539410	O	Battery Jumper Terminal Mounted Under Hood LH Frame Rail. Not available with PX-7 engines.	117	4
2539490	O	Batteries In RH BOC Box	0	0
2539720	O	Low Voltage Disconnect System	0	0
2539840	O	MD - Battery Disconnect Switch Mounted on Battery Box	470	9
2621030	O	On/Off Fan Clutch On/Off Fan Clutch provides increased torque to provide engine cooling to prevent the engine from overheating.	340	0
2723210	S	18.7 CFM Air Compressor N/A X15. Furnished on engine. Teflon lined stainless steel braided compressor discharge line.	0	0
2812140	O	C-Brake By Jacobs, PX-9 Features a dedicated cam lobe design for optimum power and three-stage engine brake operation.	2,457	90

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
2921110	S	PACCAR Fuel/Water Separator Standard Service PACCAR Fuel/Water separator standard service intervals. High efficiency media protects critical engine components.	0	0
2921210	S	No Fluid Heat Option for Fuel Filter	0	0
2921310	S	No Electric Heat Option for Fuel Filter	0	0
3010400	O	Engine Protection Shutdown w/ Label Includes oil pressure, oil temperature, coolant temperature, and intake manifold temperature.	5	0
3114270	S	High Efficiency Cooling System Cooling module is a combination of steel and aluminum components, with aluminum connections to maximize performance and cooling capability. Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. Chevron Delo Extended Life Coolant (NOAT) extends maintenance intervals reducing maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 367 1325 sq in, 367 HH Fepto 1325 sq in, 365 Fepto 1183 sq in, 365 Full Frame Extension 1000 sq in, 520 1202 sq in, 579 1456.9 sq in, 535/536/537/548 949.3 sq in, 537/548 VOC 1000.3 sq in, 389/367 HH 1604 sq in, 365/567 1379 sq in.	0	0
3211140	S	(1) Air Cleaner Engine Mounted	0	0
3365270	O	Exhaust Single RH Side of Cab DPF/SCR right-hand Under Cab.	3,030	187
3381770	O	Curved Tip Standpipe(s)	42	1
3387880	O	7" Dia Chrome Plated Steel Standpipe(s) IPO 5"	160	1
3387890	O	36" Ht, 5" Dia Chrome, Clear Coat Standpipe(s)	215	4
Transmission & Equipment				
4052920	O	Allison 3000 RDS-P Transmission, Gen 6 Rugged Duty Series	10,343	459
4210320	O	1710 HD Driveline, 2 Midship Bearings	1,166	175
4230080	O	PTO F/O Chelsea	0	0
4233910	O	(1) Dash Mounted Single Acting EOH PTO Control Electric-over-hydraulic, spec'ing PTO switch does not ensure the PTO will fit. Sends signal to Allison to engage PTO.	103	1
4240010	O	Allison Transmission Oil Cooler Aero with Allison 4000 or high torque PX-9	503	13
4240020	O	Automatic Transmission Oil Cooler Vocational Hood Only	1,078	13
4252170	O	Auto Neutral Activates With Parking Brake	17	0

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/Opt	Description	\$ List	Weight
		Auto Neutral helps improve jobsite safety by reducing the possibility of the truck moving due to throttle application.		
4252890	O	Allison FuelSense 2.0 Not Desired	0	0
4252940	O	Allison Neutral At Stop Neutral at Stop features and benefits: Reduces or eliminates the load on the engine when vehicle is stopped, can help lower fuel consumption and CO2 emissions, and is included in FuelSense 2.0 Plus and Max packages only.	0	0
4256640	O	Allison 6-Speed Configuration, Close Ratio Gears 3000 Series Transmissions.	0	0
4256920	O	Dash Mounted Push Button Shifter Available with Allison transmissions	540	3
4256990	O	Rolling Direction Change Shift Inhibit Feature Allison transmissions. A programmable feature that keeps the transmission from shifting from Drive to Reverse or from Reverse to Drive above a preset speed. This wireless function is enabled when a switch is closed to complete the circuit between input wire 101 and ground. Frequently the function is interfaced with a switch indicating activation of another vehicle function, such as application of the service brakes. When the function is enabled, the TCM will recognize the request for a direction change shift, Reverse-to-Drive or Drive-to-Reverse. If all other operating conditions are acceptable, the TCM will command the requested shift. The enable remains in effect until the switch is opened, followed by the selection of a different direction, Reverse or Drive, at the shift selector. This could be used for doc spotters and refuse. If the function is not enabled, any shift which results in a change of direction is inhibited.	0	0
4257110	O	LH Mounted Trans PTO Provisions	35	0
4257120	O	RH Mounted Trans PTO Provisions	179	0
Air & Trailer Equipment				
4510210	O	Bendix AD-HF EP Air Dryer, Heater Coalescing filter, extended purge. Bendix AD-HF air filters protects the life of your engine system and components. Proven PuraGuard oil coalescing technology in the the air dryer cartridge. This oil coalescing filter ensures the removal of oil and oil aerosols before they can contaminate the moisture removing desiccant.	252	0
4520420	O	Pull Cords All Air Tanks	3	0
4540420	S	Nylon Chassis Hose	0	0
4543320	S	Steel Painted Air Tanks All air tanks are steel with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for	0	0

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
		factory installation. See ECAT to determine number or location of air tanks installed.		
4543390	O	High Mount Air Tanks BOC/BOS Where Possible Subject to frame review	0	0
4544010	O	Wiring Provision For F/O Brake Controller For trucks that have trailer connections tailored to the light trailer with cab pre-wire for trailer brake controllers. Not available with option 4620080.	653	0
4611930	O	Body Connections 5' BOC Junction box contains light and power circuits for body connections located 5' from back-of-cab	92	4
4612900	O	AE Connection EOF, 7-Way Socket, Connection EOF Strapped to the rail	461	15
Tires & Wheels				
5056840	O	FF: MN 16ply 11R22.5 X Line Energy Z Efficiency Rating: Fair The MICHELIN X LINE ENERGY Z tire is a line haul steer tire built for high miles and better rolling resistance. Diameter= 41.3 inches; SLR= 19.3 inches	456	8
5156120	O	RR: MN 16ply 11R22.5 X Multi D Efficiency Rating: Poor Diameter= 41.4 inches; SLR= 19.4 inches	1,510	56
5190004	O	Code-rear Tire Qty 04	0	0
5220600	O	FF: Peterbilt 88U677 22.5X8.25 High Polish Aluminum, Ultra ONE technology.	413	-40
5320600	O	RR: Peterbilt 88U677 22.5X8.25 High Polish Aluminum. Ultra ONE technology.	826	-80
5390004	O	Code-rear Rim Qty 04	0	0
5407640	O	FF: Mirror Polish Wheels, Outer Surface Single/tandem steer. Mirror Polish outer surface of outer wheel. Without chrome wheel nuts.	66	0
5407650	O	RR: Mirror Polish Wheels, Outer Surface, Single Drive without chrome wheel nuts. Mirror polish outer surface of outer wheel.	255	0
5409325	O	Wheel Guards, Single Axle Wheel guards provide a protective barrier to maintain the integrity between the brake drums and wheels to ensure the maximum life for your polished wheels.	17	0
5410140	O	FF: Dura-Bright Finish Outer Surface of Outer Wheel, requires Polished Option	236	0
5410150	O	RR: Dura-Bright Finish-Single Axle Outer Surface of Outer Wheel, requires Polished Option.	236	0
Fuel Tanks				

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
5584100	O	D-Shaped Aluminum 70 Gallon Fuel Tank LH U/C Non-slip step LH under cab	187	0
5602070	O	Location LH U/C 70 Gallon	0	0
5650540	O	Polish (1) Non-Slip Fuel Tank Step, U/C Tank Only	30	0
5650810	O	Polish (1) Aluminum Fuel Tank	202	0
5652830	O	Polish All Fuel / Hydraulic Tank Straps Does not apply to rectangular DEF tank straps	2	0
5652890	S	DEF Tank Mounted LH BOC Models 220 and 520 mounted left hand back-of-cab.	0	0
5652990	O	DEF To Fuel Ratio 2:1 Or Greater	0	0
5653000	O	Polished Stainless Steel Cover For DEF Tank	177	0
5655039	O	DEF Tank Large, HD 30 Gal 2.1M MD 15 Gal	719	30
Battery Box & Bumper				
6010780	O	Aluminum Space Saver Battery Box RH BOC Battery access from side	189	-84
6040550	O	Aftertreatment Aluminum Non-Slip Cab Entry Aftertreatment right-hand under cab step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box is aerodynamic.	0	0
6112840	O	Steel Bumper Tapered Chromed Two tow points. ***Warning*** Due to a new legal regulations, all New Medium Duty trucks require headlights to be located in the bumper when the chassis height is GREATER than the following chassis height: Measurement to bottom of frame at front of frame: for the 107 Aero Hood 32.6, for the 109 Aero Hood 31.4, for the 109 Vocational Hood 26.7. Work with applications if your chassis height is unacceptable.	522	115
Cab & Equipment				
6510170	O	109" Fepto Hood w/Stationary Grille, 3pc Metton	2,619	15
6540160	O	Thermal Insulation Package in Cab The thermal insulation package is designed to make the cab thermally efficient in extreme temperatures. The model 520 adds insulation surrounding the doghouse to reduce engine heat transmitted to the cab.	68	2
6540740	O	Peterbilt Keyless Entry The Peterbilt key fob functions to lock or unlock the vehicle. With a single click, the drivers door is locked or unlocked and with a double click all doors are locked or unlocked. The third button, depicted by a picture of a lamp, will start the exterior light self-test sequence, helpful when performing the daily pre-trip inspection.	211	2
6917340	O	Peterbilt Premium Driver Seat	120	4

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/Opt	Description	\$ List	Weight
6927340	O	Peterbilt Premium Passenger Seat	54	14
6930230	O	Seat Skirt - All Eligible Air Seats	61	2
6930580	O	Drivers Armrests - LH & RH	57	4
6930590	O	Passenger Armrest - LH only Required with Evolution LX seats, optional with Evolution ST Seats.	28	2
6939390	O	Seat Belt Alarm System Driver and Passenger Seats Seat belt alarm system driver and passenger seats. Radio mute when seat belt warning active and compatible radio. Driver/Passenger feature to alert occupants if the seat belt is not buckled. Light will appear in the dash when vehicle has key power turned on as well as a seat belt "chime" will alert the occupants as the vehicle travels at an increased speed.	116	0
6939400	S	Air Ride Driver	0	0
6939420	O	High Back Driver	44	0
6939470	S	Vinyl Driver	0	0
6939500	O	Air Ride Passenger	118	0
6939520	O	High Back Passenger	8	0
6939570	S	Vinyl Passenger	0	0
7000025	O	Steering Wheel With Multi-Function Includes Peterbilt logo on horn button , audio volume, seek, mute and mode button on LH pod with cruise control on/off/cancel, set/resume and accelerate/coast on the right pod.	242	4
7000045	O	High-Visibility Interior Grabhandles, Painted Bright yellow interior grabhandle for vocational vehicles.	66	0
7001520	S	Adjustable Steering Column - Tilt/Telescope	0	0
7036130	O	Probilt Interior Grey/Black - Curved Roof	180	0
7110680	O	Exterior Cab Entry Grabhandle Textured; NFPA compliant. Available on Day Cab specifications only.	176	0
7210510	O	3-Piece Glass Rear Cab Window, All Pieces Fixed	175	12
7210540	S	Day Cab Rear Window Day cab rear window flush to back of cab.	0	0
7230060	S	1-Piece Curved Windshield	0	0
7230360	S	Power Door Locks and Power Window Lifts Standard	0	0
7322010	S	Combo Fresh Air Heater/Air Conditioner	0	0

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/Opt	Description	\$ List	Weight
		With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.		
7410040	O	Outside Sunvisor - Stainless Steel Not available with 2.1M high roof sleeper.	261	4
7510060	O	Aero Rear View Mirror Housing, Bright Finish	175	3
7514010	O	Peterbilt Aero Rear View Mirror, Motorized Includes top mirror with motorized, adjustable dual axis heated glass. Bottom mirror is an integrated convex surface. Includes black textured arms with breakaway feature.	257	3
7514050	S	Look Down Mirror Over Passenger Door with Black Housing	0	0
7620040	O	(2) Air Horns Round, 26" Length Roof mounted. Round horn shield.	290	16
7721050	O	Satellite Radio Requires USB port and bluetooth for phone and audio.	225	0
7722120	O	ConcertClass, AM/FM, Weatherband, 3.5 Aux	341	11
7725710	O	Standard Speaker Package For Cab (2) Speakers	51	4
7728030	O	Radio Mute When In Reverse For automatic or automated transmission	0	0
7728040	O	Bluetooth Phone and Audio Requires USB Port	39	0
7728050	O	USB Port	39	0
7850015	O	Rear Wall Deep Record/Map Pocket	124	2
7851480	S	Peterbilt Electric Windshield Wipers With Intermittent Feature.	0	0
7852020	O	Cab Air Suspension	175	15
7852050	O	Auto Reset Circuit Protection Daycab and Sleeper	19	0
7900090	O	Triangle Reflector Kit, Ship Loose Florescent triangle emergency road flares are designed to meet and exceed all DOT standards.	24	13
7900310	O	Fire Extinguisher, Mounted Outboard Driver Seat Hazmat approval UL listed/rated ABC	57	9
7900401	O	Cruise Control Inactive With Wipers On	0	0
7900520	O	Headlamps To Turn On When Wipers On	0	0
7901130	O	Backup Alarm (107 DB)	35	3
8011410	O	Drive Axle #1 Front Oil Temperature Gauge	134	0

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
		52mm round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.		
8011850	O	Transmission Oil Temperature (Main) Located in Digital Cluster Display.	25	0
8021380	S	Air Restriction Indicator Mounted on air cleaner, intake piping, or firewall	0	0
8021530	O	Air Suspension Pressure 1 Gauge 52mm round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6.	108	0
8022160	O	Fuel Filter Restriction Gauge 52mm Round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	203	0
8041200	O	Dual Scale Speedometer MPH Over KPH	0	0
8070100	O	(4) Additional Dash Switches With Wiring Located on dash panel C. Availability subject to dash space. Includes 4" 14 gauge wire with butt splice at rear of each additional switch.	188	1
8070810	O	Engine Manifold Pressure (Turbo Boost) Located in Digital Cluster Display	0	0
8070860	S	Main Instrumentation Panel Digital Cluster 7" Display includes: Physical (Analog) - Speedometer, Tachometer, Oil Pressure, Coolant Temp and Display Gauges - Fuel Level, DEF Level, DPF Filter Status, Fuel Economy, Volts Telltale, OAT and Primary Air Pressure, Secondary Air Pressure for air brake trucks.	0	0
8071900	O	Manifold Pressure Gauge 52mm Round, backlit. Physical gauges must be ordered in pairs and are limited to a total of 6. If this option is selected on a truck with VMUX electrical architecture, the gauge will be included in the digital display.	50	2
8111110	S	Headlights Composite Fender Mounted Integral DRL/Park, Turn, and Side Marker	0	0
8120980	S	(5) Marker Lights, Aero LED	0	0
8132215	O	(2) LED Strobe Lights Roof Mounted (2) LED strobe lights roof mounted on each side of the cab with stainless steel brackets. LED technology provides continual heavy-duty use in the toughest conditions with a weatherproof and vibration resistant design for external use. Offering four times the brightness in a more compact housing, 4.5" shorter and 3" smaller in diameter. Classified as a Class 1 light incandescent light.	530	10
8134160	S	Self-Canceling Turn Signal	0	0
8134180	O	Daytime Running Lights, Mounted In Bumper Driven by chassis height	194	0
8140120	O	Incandescent Square Stop/Turn/Tail/Backup Left-hand / right-hand square end of frame or dropped a-brace	-6	9
8151190	O	(2) Load Lights, LED, Flush Mounted Low Inboard Back of cab / back of sleeper	171	4

Price Level: January 1, 2023

Deal: 537 Option Specs

Printed On: 6/23/2023 11:38:57 AM

Date: June 23, 2023

Quote Number: QUO-1050924-S0S6N7



Sales Code	Std/ Opt	Description	\$ List	Weight
Paint				
8500710	O	Standard Paint Color Selection	-200	0
8530770	S	(1) Color Axalta Two Stage - Cab/Hood Base Coat/Clear Coat N85020 A - L0006EY WHITE N85500 CAB ROOF L0006EY WHITE N85300 FENDER L0006EY WHITE N85200 FRAME L0001EA BLACK N85400 HOOD TOP L0006EY WHITE	0	0
Shipping Destination				
Options Not Subject To Discount				
9400091	S	Peterbilt Class 7 Standard Coverage 1 year/Unlimited Miles/km	0	0
9408703	O	Base Warr: Emissions 5YR/100K MI-EPA Engine	0	0
Miscellaneous				
9409044	O	109" Stationary Grille Hood (MODEL 537)	0	0
9409096	O	State Registry: Virginia	0	0

Promotions

Order Comments



Total List Price (W/O Freight & Warranty & Surcharges)	\$172,812
Marketing and Service Support Fee	\$870
Prepaid Freight	\$3,525
Total Surcharge/Options Not Subject To Discount	\$0
Total Weight	13,318

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information




Shipping Destinations

Intermediate Destination: NONE

Final Destinations	Quantity
--------------------	----------

HORIZONTAL DIMENSIONS

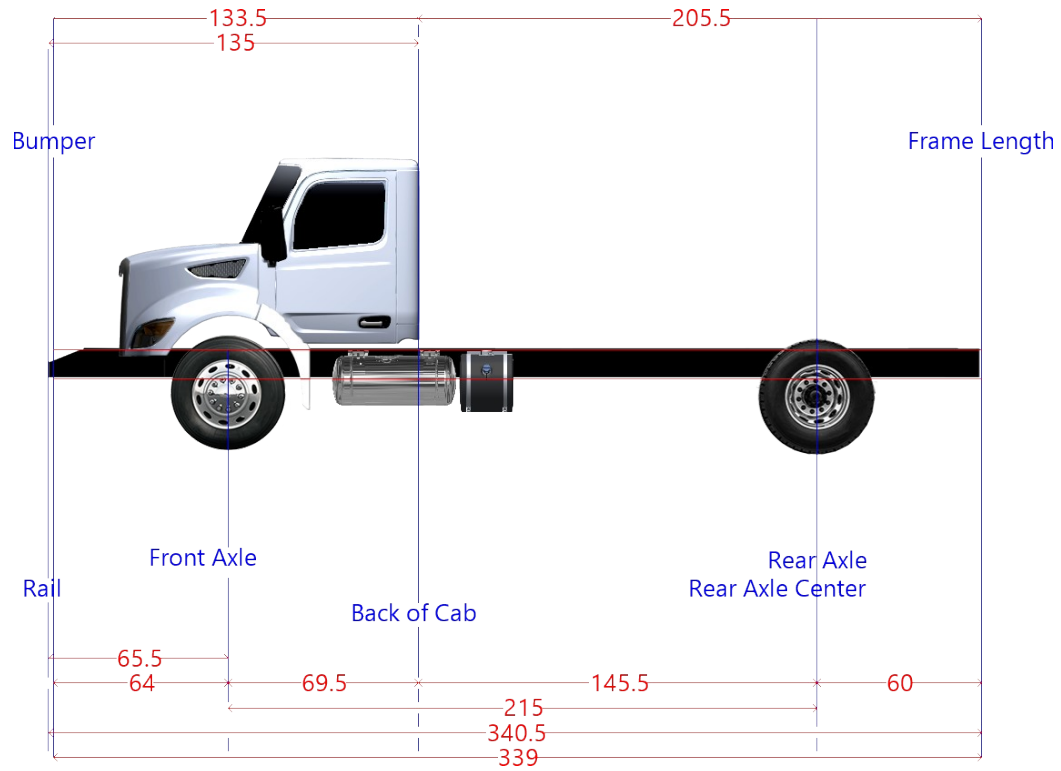

Dimension	Measurement	Start	End
Axle Spacing	0	215	215
Bumper to Back of Cab	133.5	-64	69.5
Bumper to Front Axle	64	-64	0
Bumper to Front Frame	-1.5	-64	-65.5
Cab to End of Frame	205.5	69.5	275
Cab to Rear Axle	145.5	69.5	215
Effective Bumper to Back Of Cab	133.5	-64	69.5
Frame Length	340.5	-65.5	275
Front Axle to Back of Cab	69.5	0	69.5
Front of Frame to Axle	65.5	-65.5	0
Load Space	205.5	69.5	275
Overall Length	339	-64	275
Overhang	60	215	275
Pusher Offset #1	0	215	215
Pusher Offset #2	0	215	215
Pusher Offset #3	0	215	215
Tag Offset	0	215	215
Wheelbase	215	0	215